


## R-290 charge inventory at the design point --- total 5.5 to 8.7 kg

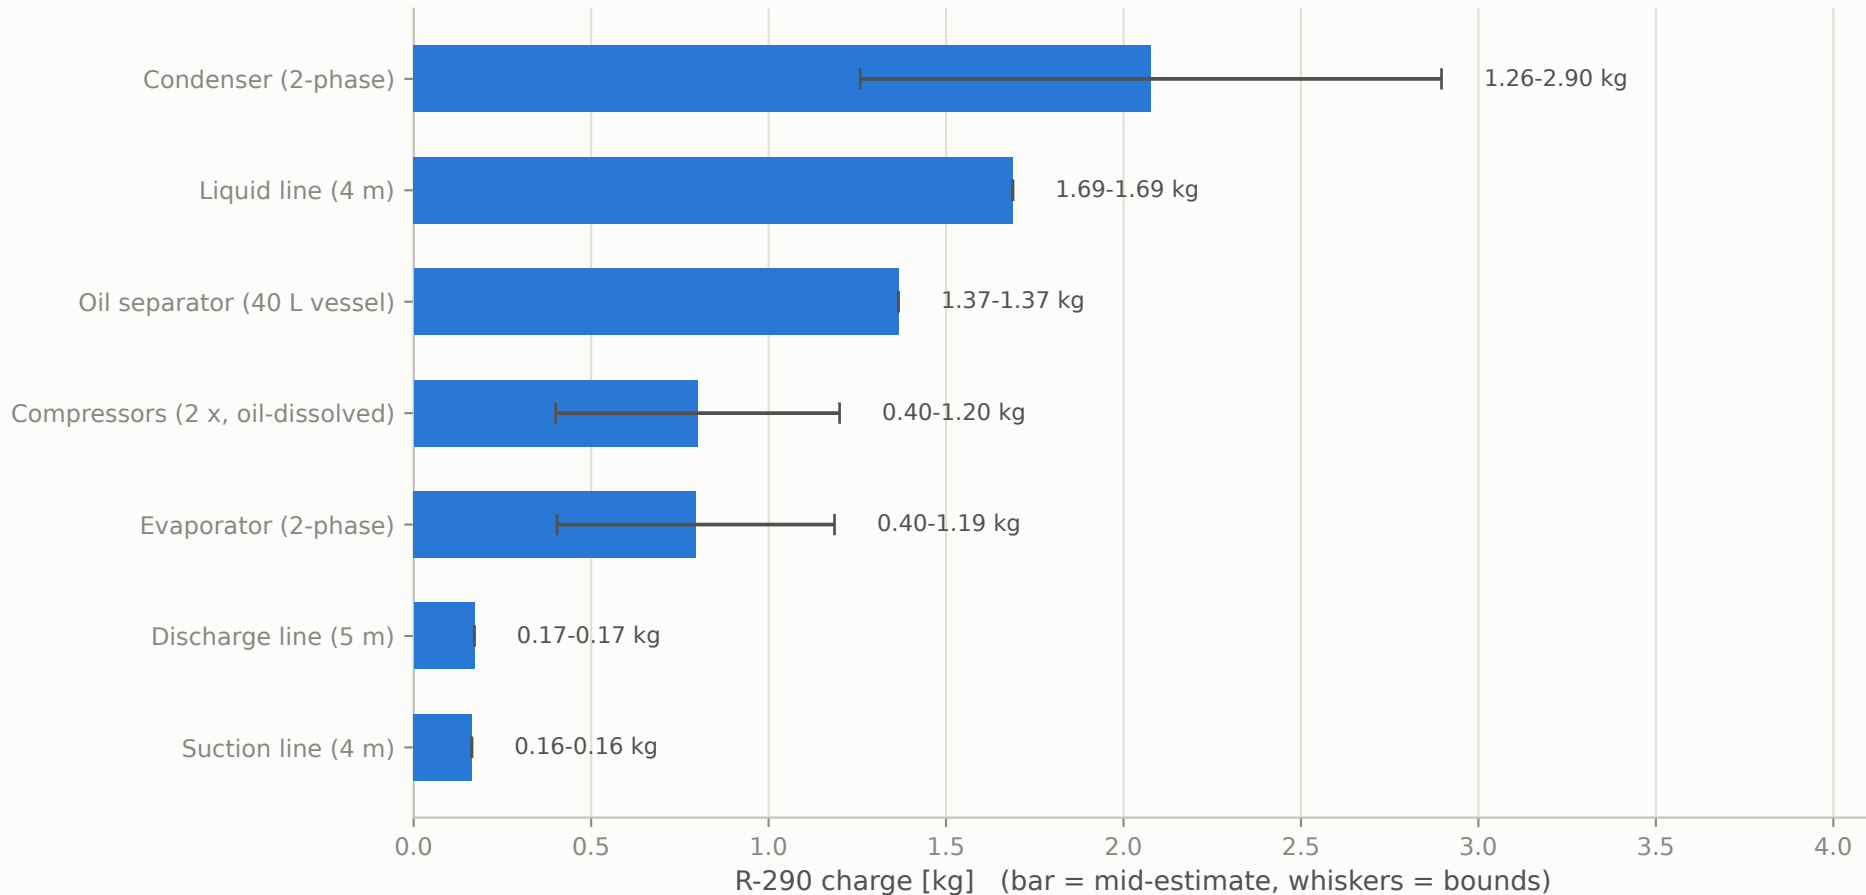

Ranges reflect two-phase void fraction (exchangers) and oil-dissolved refrigerant.

Charge-minimized layout: 4 m liquid line (condenser and evaporator co-located), no receiver; brief scopes piping to diameters only.