


EEV control authority across the 5:1 load turndown

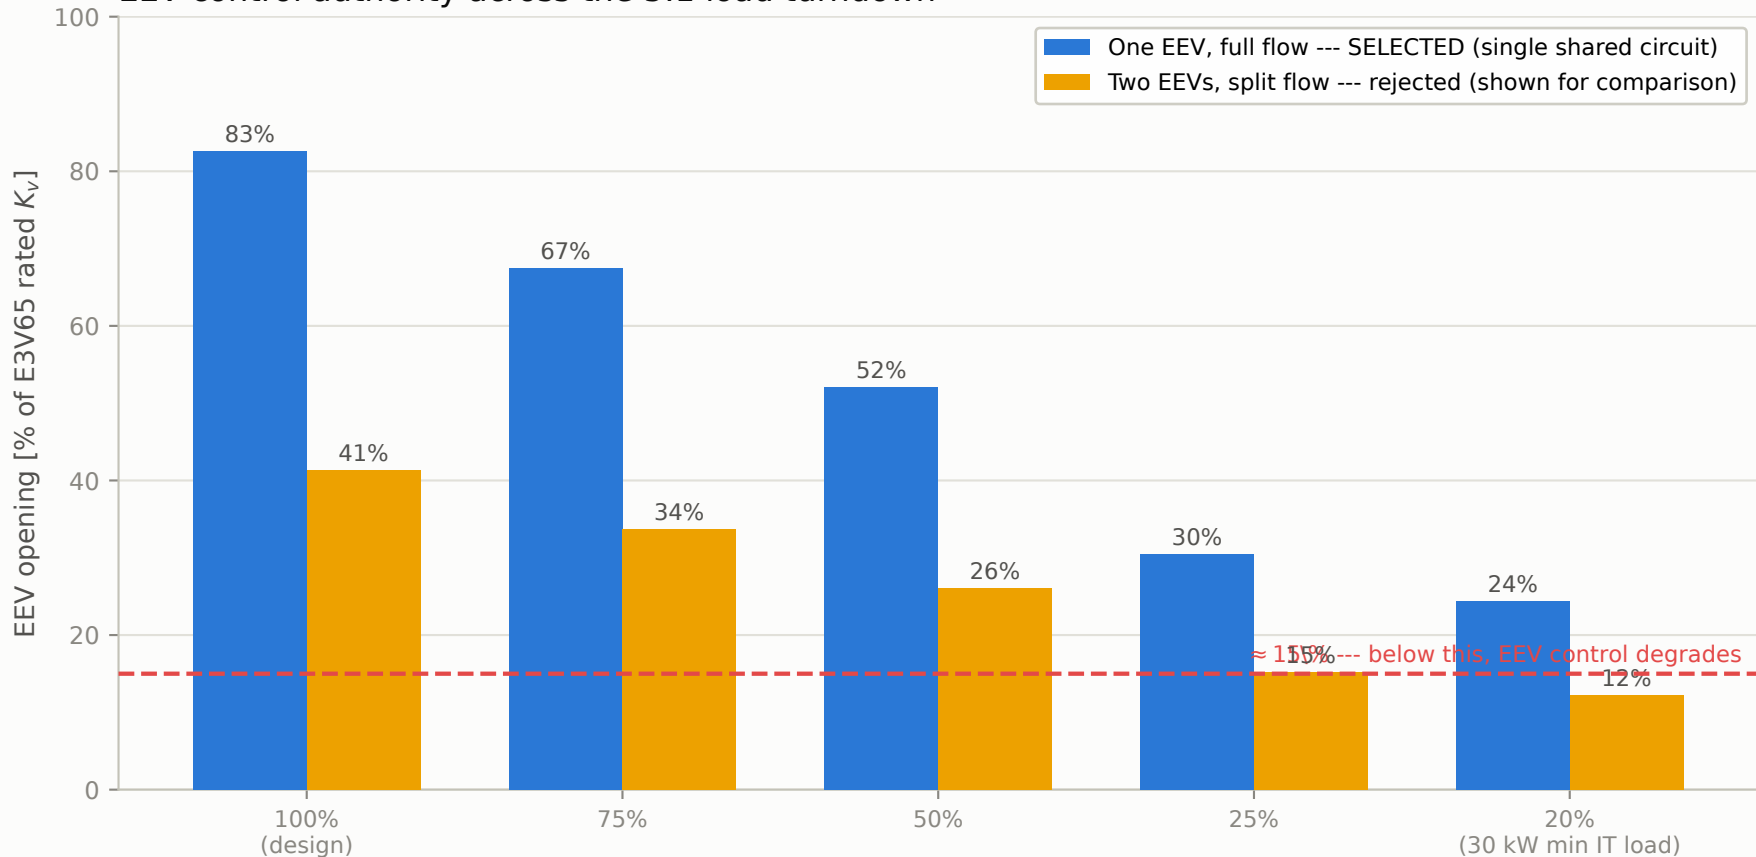

Each load point sits at its own reduced condenser-entering-air temperature (AHRI 550/590), so this is the real envelope.

The rejected two-EEV case runs out of authority at minimum load; the selected one-EEV arrangement stays controllable across the full 5:1 turndown.