


Working-fluid screening: COP at identical cycle conditions
(7C evap / 52C cond, 8K superheat, 5K subcool, 70% isentropic efficiency, all candidates)

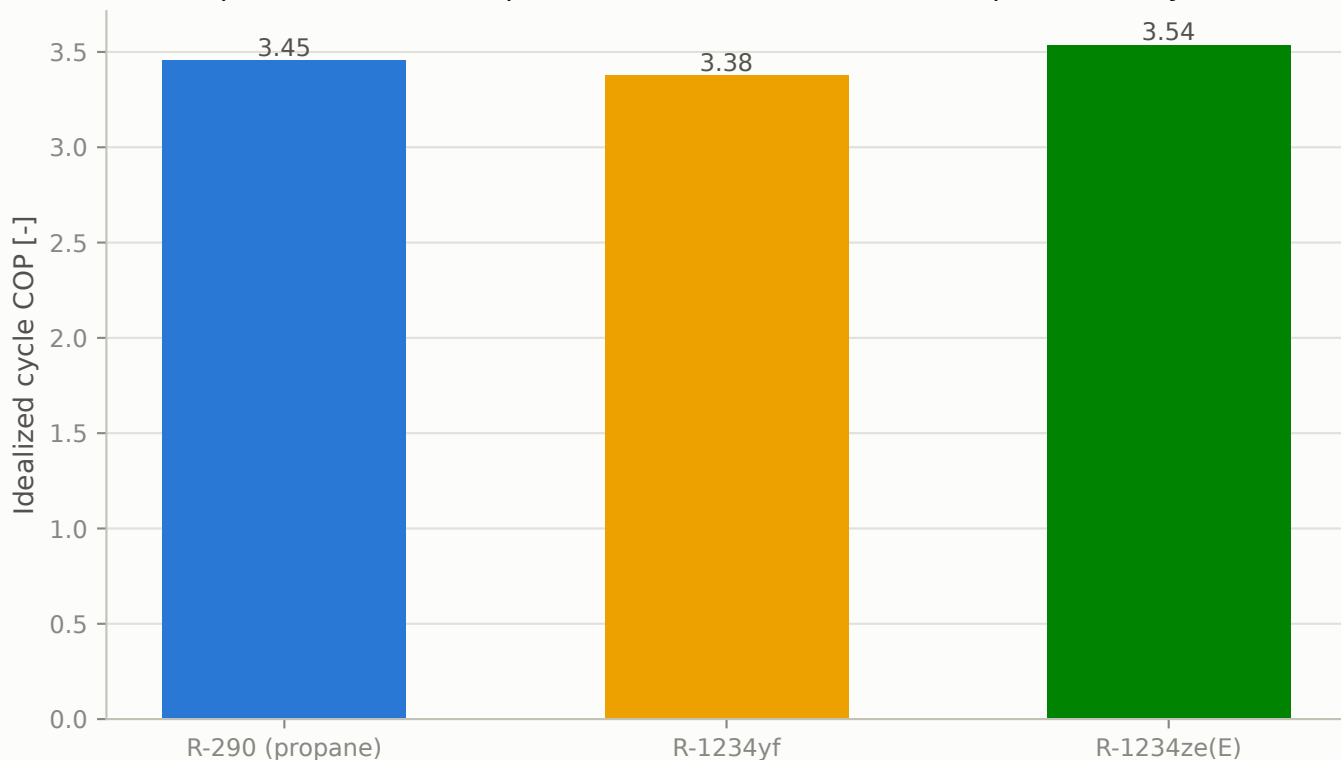

All candidates satisfy GWP<150 and ASHRAE 34 safety class A1/A2L/A3 by construction (screening constraint, project spec).