DESIGNATION	BRIDGE FILE
2600080	010-37-04888D
CONTRACT	
R-43918	

STRUCTURE	TYPE	SPAN AND SKEW	OVER	STATION
010-37-04888D	CONTINUOUS STEEL BEAM BRIDGE	4 SPANS: 39'-0½", 65'-9", 65'-9", 39'-0½" SKEW: SQUARE	I-65	454+90.70 Line "B"

KIN PROJECT INFORMATION	
DESIGNATION	DESCRIPTION
2000020 (Lead)	INTERCHANGE MODIFICATION AT I-65 AND SR 10

INDIANA DEPARTMENT OF TRANSPORTATION

BRIDGE PREVENTIVE MAINTENANCE PLANS


FOR SPANS OVER 20 FEET


ROUTE: S.R. 10 AT: RP 13+78

DESIGNATION NO. 2600080

NO ADDITIONAL RIGHT-OF-WAY REQUIRED FOR THIS PROJECT

PROJECT DESCRIPTION Bridge No. 010-37-04888D is a Bridge Approach Replacement for S.R. 10 over I-65 located on section line between section 7 & 18, T 31 N, R 7 W, Keener Township, Jasper County, Indiana.

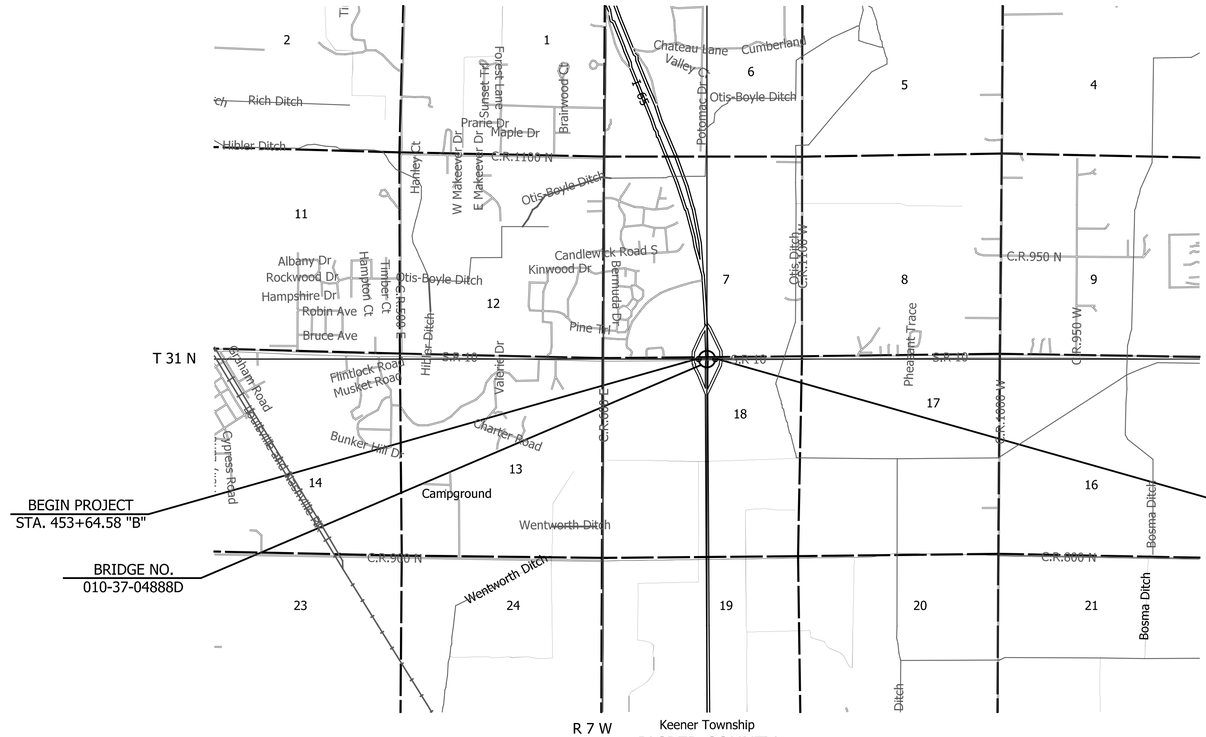




Scale: 1"=2,000'

TRAFFIC DATA

A.A.D.T. 2026	14,750	V.P.D.
A.A.D.T. 2036	16,500	V.P.D.
D.H.V 2036	1,318	V.P.H.
DIRECTIONAL DISTRIBUTION	62	%
TRUCKS	13 %	A.A.D.T.
	14 %	D.H.V.

DESIGN DATA

DESIGN SPEED	45 M.P.H.
PROJECT DESIGN CRITERIA	3R (NON-FREEWAY)
FUNCTIONAL CLASSIFICATION	MINOR ARTERIAL
RURAL/URBAN	RURAL
TERRAIN	LEVEL
ACCESS CONTROL	PARTIAL

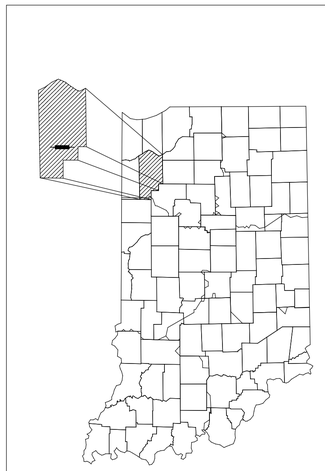

PROJECT LOCATION SHOWN BY
JASPER COUNTY

LATITUDE: 41°8'40" LONGITUDE: -87°15'57"

BRIDGE LENGTH:	0.040	MI.
ROADWAY LENGTH:	0.008	MI.
TOTAL LENGTH:	0.048	MI.
MAX. GRADE:	0.39	%

INDIANA DEPARTMENT OF TRANSPORTATION
STANDARD SPECIFICATIONS DATED 2026
TO BE USED WITH THESE PLANS.

AMERICAN STRUCTUREPOINT INC.
9025 RIVER ROAD, SUITE 200
INDIANAPOLIS, IN 46240
TEL 317.547.5580 FAX 317.543.0270
www.structurepoint.com

THOMAS J. McNICHOLAS REGISTERED No. PE11400383 STATE OF INDIANA PROFESSIONAL ENGINEER

PLANS PREPARED BY:	American Structurepoint, Inc.	(317) 547-5580 PHONE NUMBER
CERTIFIED BY:	Thomas J. McNicholas	06/04/2026 DATE
APPROVED FOR LETTING:	Luis A. Larsen	09/02/2026 DATE
	INDIANA DEPARTMENT OF TRANSPORTATION	

BRIDGE FILE
010-37-04888D
DESIGNATION
2600080
SHEETS
1 of 14
CONTRACT
R-43918

Indy-Prf.dftcfg
Indiana_Shade.tbl
bwhitehead 6/5/2026 5:30:41 PM P:\2021\03330\D. Drawings\202103330.0002.BR.BTS.dgn

UTILITIES

SEE ROADWAY PLANS

Know what's below. Call before you dig.

REVISIONS

SHEET NO.	DATE	REVISED

GENERAL NOTES

	All earth shoulders, median areas, and cut and fill slopes shall be plain or mulch seeded except where sodding is specified
	The final cross sections of the grading contract will be the original cross sections of the paving contract. However, partial or complete cross sections shall be taken if necessary to determine the actual excavation quantities.
	The paper relocation will be cross sectioned by the Engineer before construction.
	Existing asphalt pavement located outside the construction limits, between Sta. _____ and Sta. _____, shall be removed as directed.
	The quantity of peat excavation shown on the plans has been estimated on the basis of theoretical cross sections by using treatment of existing fills, treatment by removal, or treatment by displacement, where each treatment applies.
	All limited access right-of-way (L.A. R/W) is to be fenced with chain link type fence (CLTF) or farm field type fence (FFTF) where specified in the plans.
	Contractor shall verify existing flowline elevations to set the appropriate sump depth.

** REPRESENTS GENERAL NOTES REQUIRED

INDEX

SHEET NO.	DRAWING INDEX
1	TITLE
2	INDEX AND GENERAL NOTES
3	TYPICAL SECTIONS
4	PROFILES LINE "B"
5-6	CONSTRUCTION DETAILS
7-8	SPOT ELEVATION DETAILS
9	CONCRETE JOINT DETAILS WEST ROUNDABOUT
10	CONCRETE JOINT DETAILS EAST ROUNDABOUT
11-12	GENERAL PLANS
13	R.C. BRIDGE APPROACH DETAILS
14	BRIDGE SUMMARY OF QUANTITIES

THOMAS J. McNICHOLAS REGISTERED No. PE11400383 STATE OF INDIANA PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Thomas J. McNicholas 06/04/2026
DESIGN ENGINEER DATE

DESIGNED: MKA DRAWN: MKA
CHECKED: TJM CHECKED: TJM

INDIANA
DEPARTMENT OF TRANSPORTATION


INDEX AND GENERAL NOTES

HORIZONTAL SCALE	BRIDGE FILE
NONE	010-37-04888C
VERTICAL SCALE	DESIGNATION
NONE	2600080

SHEETS: 2 of 14
CONTRACT: R-43918


Indy-Rdf.dfcfg
Indiana_Shade.tbl

bwhitehead 6/5/2026 5:30:42 PM P:\2021\03330\D. Drawings\202103330.0002.BR.IN.dgn

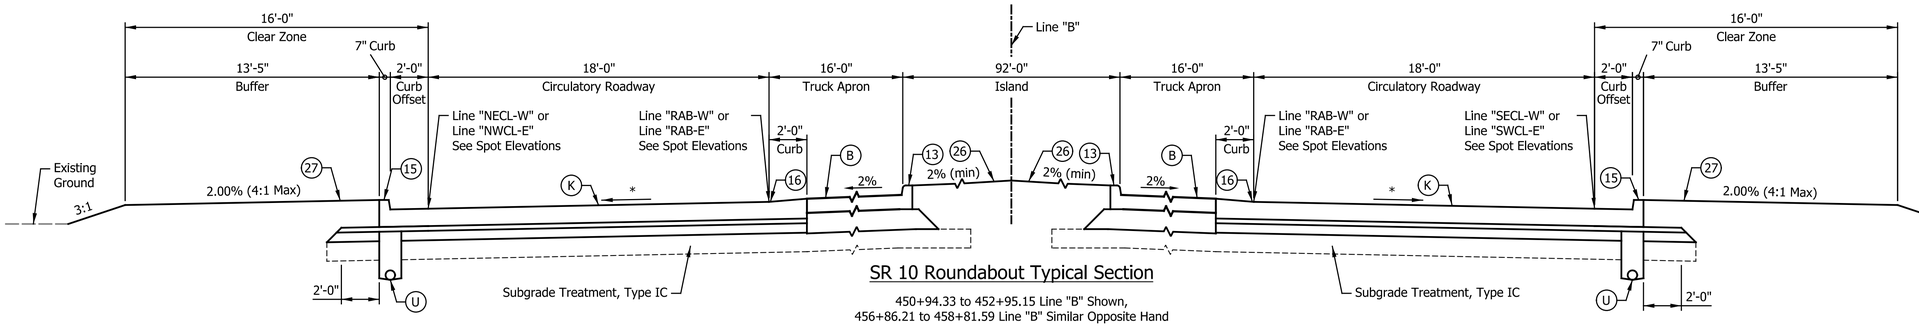


SR 10 Roundabout Typical Section

450+94.33 to 452+95.15 Line "B" Shown,
456+86.21 to 458+81.59 Line "B" Similar Opposite Hand

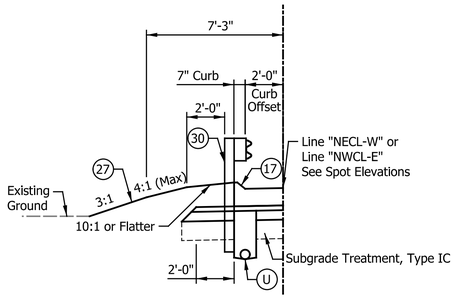


SR 10 Roundabout Typical Left Guardrail Section

453+02.33 to 453+64.58 Line "B" Shown,
456+16.81 to 456+75.35 Line "B"

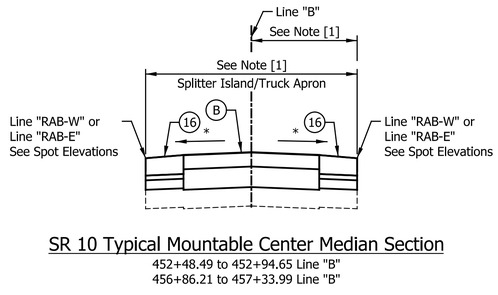


SR 10 Typical Mountable Center Median Section

452+48.49 to 452+94.65 Line "B"
456+86.21 to 457+33.99 Line "B"

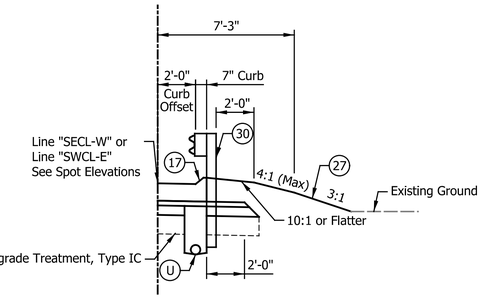

SR 10 Roundabout Typical Right Guardrail Section

453+08.79 to 453+64.58 Line "B" Shown,
456+16.81 to 456+93.94 Line "B"

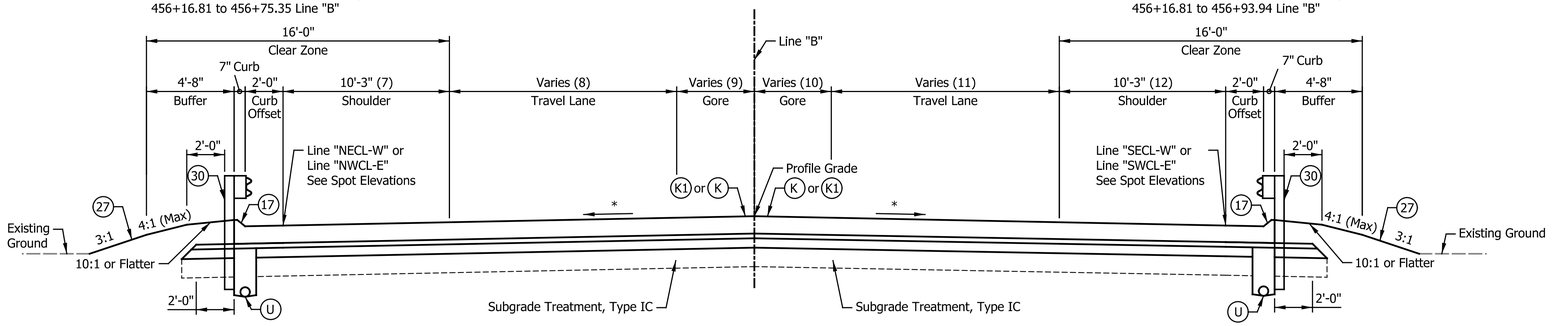

SR 10 Typical Section

452+95.15 to 453+64.58 Line "B"
456+16.81 to 456+86.21 Line "B"

(7) Varies 5'-5" to 10'-3" from 452+95.15 to 453+33.02 Line "B"
Equals 10'-3" from 453+33.02 to 453+64.58 Line "B"
Equals 10'-3" from 456+16.81 to 456+23.78 Line "B"
Varies 10'-3" to 0'-11" from 456+23.78 to 456+86.21 Line "B"

(8) Varies 14'-8" to 12'-0" from 452+95.15 to 453+33.02 Line "B"
Equals 12'-0" from 453+33.02 to 453+64.58 Line "B"
Equals 12'-0" from 456+16.81 to 456+23.78 Line "B"
Varies 12'-0" to 15'-5" from 456+23.78 to 456+86.21 Line "B"

(9) Varies 2'-1" to 0'-0" from 452+95.15 to 453+16.82 Line "B"
Equals 0'-0" from 453+16.82 to 453+64.58 Line "B"
Equals 0'-0" from 456+16.81 to 456+39.26 Line "B"
Varies 0'-0" to 6'-1" from 456+39.26 to 456+86.21 Line "B"

(10) Varies 6'-1" to 0'-0" from 452+95.15 to 453+42.10 Line "B"
Equals 0'-0" from 453+42.10 to 453+64.58 Line "B"
Equals 0'-0" from 456+16.81 to 456+64.54 Line "B"
Varies 0'-0" to 2'-1" from 456+64.54 to 456+86.21 Line "B"

(11) Varies 15'-5" to 12'-0" from 452+95.15 to 453+57.58 Line "B"
Equals 12'-0" from 453+57.58 to 453+64.58 Line "B"
Equals 12'-0" from 456+16.81 to 456+48.34 Line "B"
Varies 12'-0" to 14'-8" from 456+48.34 to 456+86.21 Line "B"

(12) Varies 0'-11" to 10'-3" from 452+95.15 to 453+57.58 Line "B"
Equals 10'-3" from 453+57.58 to 453+64.58 Line "B"
Equals 10'-3" from 456+16.81 to 456+48.34 Line "B"
Varies 10'-3" to 5'-5" from 456+48.34 to 456+86.21 Line "B"

LEGEND

(K) QC/QA-PCCP, 11", on
300 #/Syd. QC/QA-HMA, 4, 58E, Intermediate, OG, 19.0 mm, on
6" Compacted Aggregate No. 53, on
Subgrade Treatment, Type IC
(15' Transverse Joint Spacing with 1.5" Dowels and No. 6 Tie Bars for Longitudinal Joints with 14' Maximum Slab Width)

(K1) Jointed Reinforced Concrete Pavement, 12", on
Subbase for PCCP, on
Subgrade Treatment, Type IC, on
Geotextile for Pavement, Type 2B

(13) Curb, Integral Concrete (9" PCCP Depth)

(15) Curb, Integral Concrete (11" PCCP Depth) or
Inverted Curb, Integral Concrete (11" PCCP Depth)

(16) Curb, Integral Concrete, Modified, Roll Curb

(17) Curb, Integral, B, Concrete

(22) Concrete Center Curb, Type D

(26) Sodding

(27) Seed Mixture, Type R

(30) Guardrail, MGS, W-Beam, 6'-3" Spacing

(B) PCCP, 9", on
13" Compacted Aggregate, No. 53, on
Subgrade Treatment, Type IC
(15' D-1 Contraction Joints Spacing with 1.25" Dowel Bars)

(U) Underdrain, Pipe, Type 4, 6"

NOTES

* Cross Slopes Vary See Plan and Profiles and Spot Elevation Sheets (Travel Lanes 2% Max)
** When Travel Lane is Inverted, Gutter Pan Shall be Inverted. See Inverted Combined Concrete Curb and Gutter Detail and Spot Elevation Sheets for More Information.
[1] See Construction Details and Roundabout Geometry for Additional Widths

DATE	REVISION

FOR INFORMATION ONLY

REGINA G. SESSIONS REGISTERED No. 11500366 STATE OF INDIANA PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL: Regina G. Sessions 06/05/2026
DESIGN ENGINEER DATE

DESIGNED: PCS DRAWN: CAK
CHECKED: RGS CHECKED: RGS

INDIANA
DEPARTMENT OF TRANSPORTATION

TYPICAL CROSS SECTIONS

HORIZONTAL SCALE	BRIDGE FILE
¼" = 1'-0"	N/A
VERTICAL SCALE	DESIGNATION
N/A	2000020
SURVEY BOOK	SHEETS
N/A	3 of 14
CONTRACT	CONTRACT
R-43918	


Indy-Ref.dfcfg
Indiana_Shade.tbl


bwhitehead 6/5/2026 5:30:43 PM P:\2021\03330\D. Drawings\202103330.0002.BR.TYP.01.dgn

EARTHWORK SUMMARY

Fill +20%	=	7,808 Cys.
Common Excavation	=	12,829 Cys.
Borrow	=	1,394 Cys.
Benching*	=	3,021 Cys.

*Benching will not be paid for directly, but shall be included in the cost of other items.

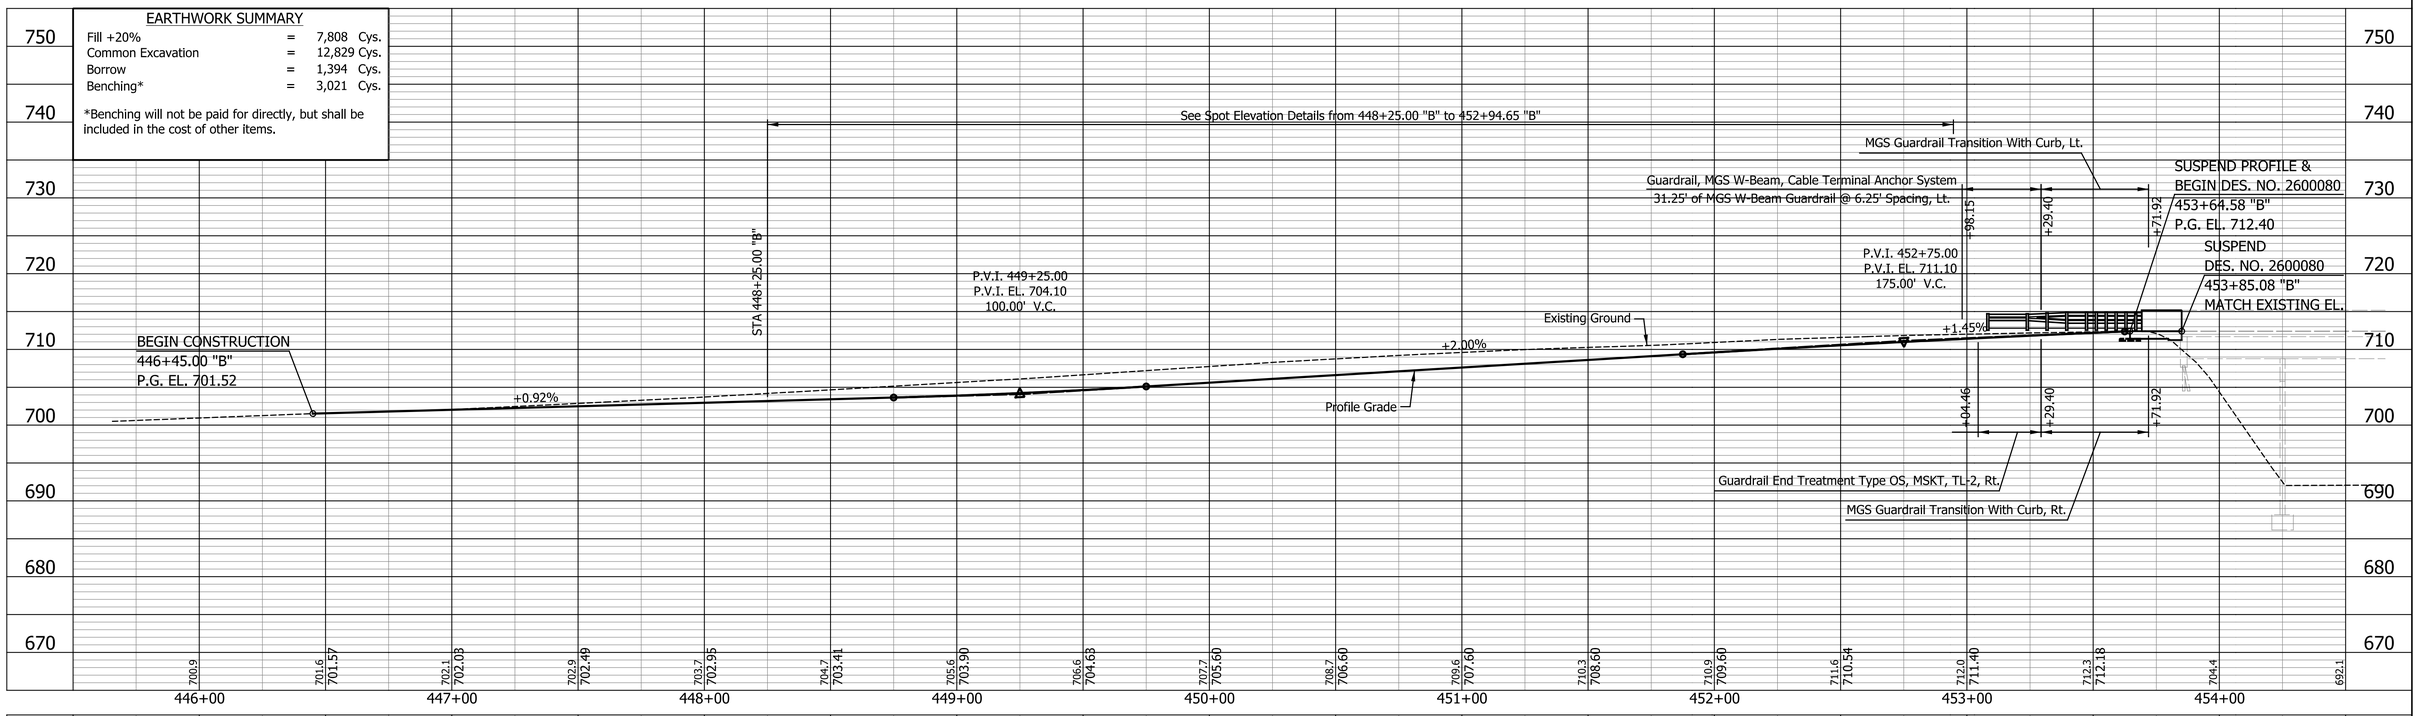

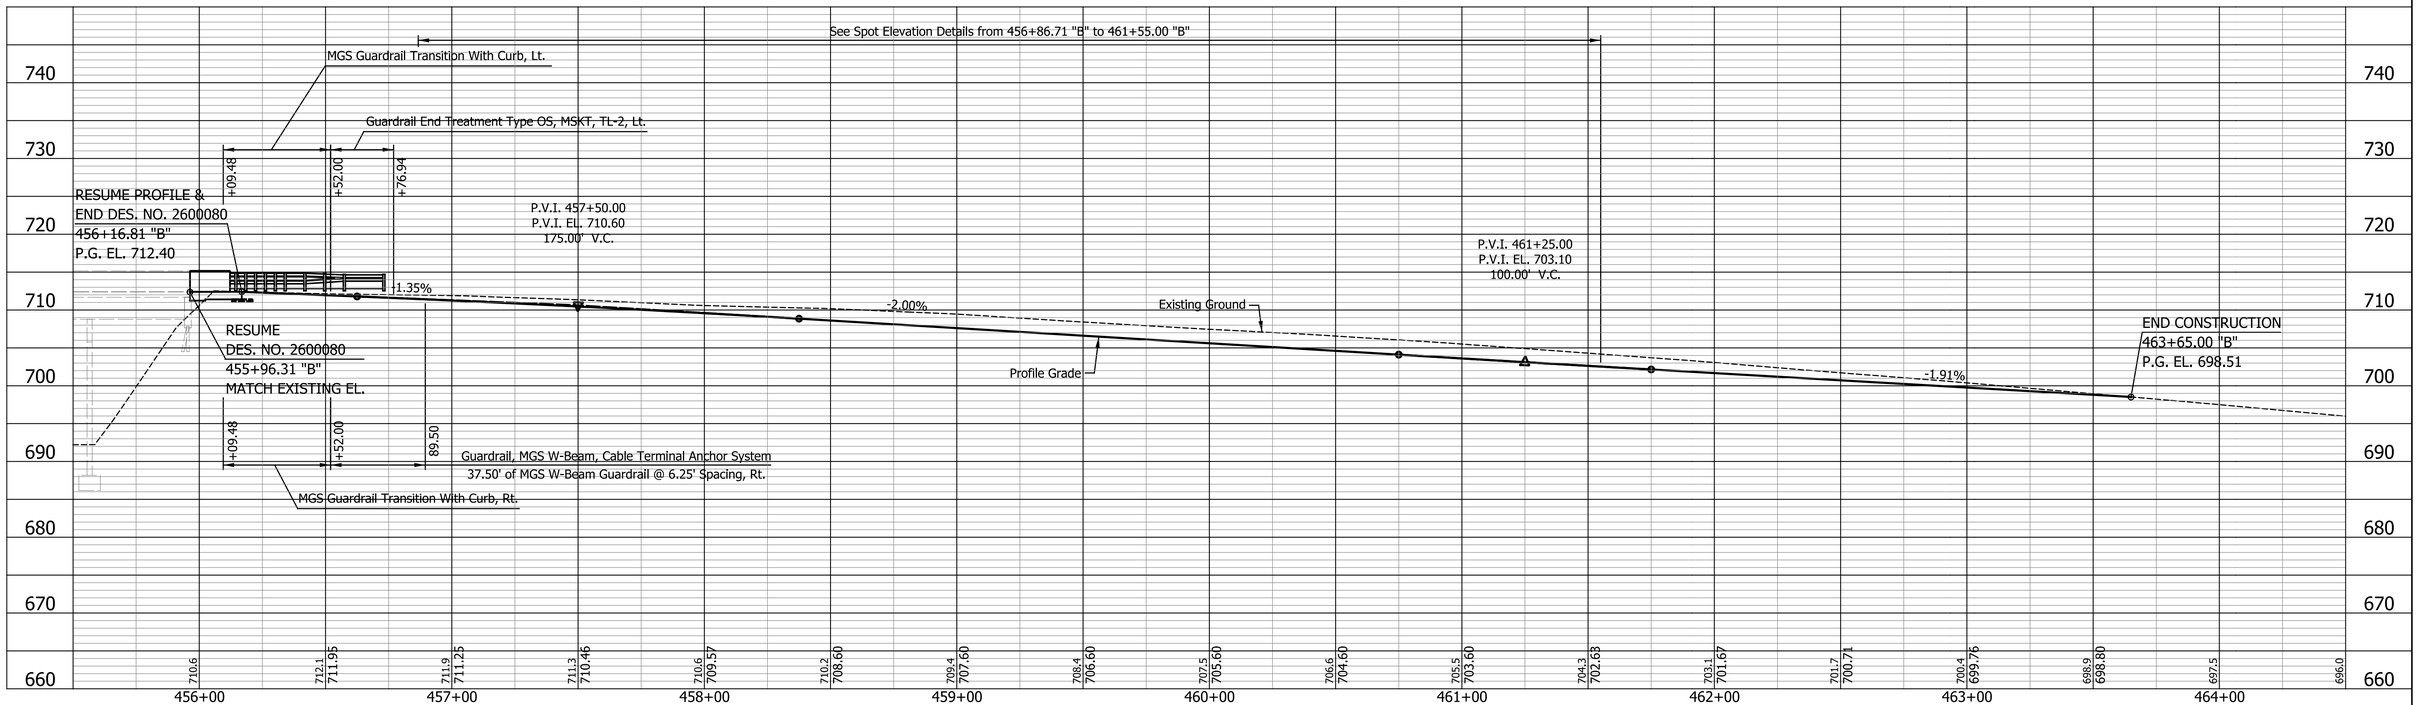

DATE	REVISION

FOR INFORMATION ONLY

REGINA G. SESSIONS REGISTERED No. 11500366 STATE OF INDIANA PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL: Regina G. Sessions 06/05/2026
DESIGN ENGINEER DATE

DESIGNED: RRB DRAWN: CAK
CHECKED: RGS CHECKED: RGS

INDIANA
DEPARTMENT OF TRANSPORTATION

PROFILES
LINE "B"

HORIZONTAL SCALE	BRIDGE FILE
1" = 30'	N/A
VERTICAL SCALE	DESIGNATION
1" = 10'	2000020
SURVEY BOOK	SHEETS
N/A	4 of 14
CONTRACT	CONTRACT
R-43918	

Indy-ePdf.pltCfg
Indiana_Shade.tbl

bwhitehead 6/5/2026 5:30:45 PM P:\2021\03330\D. Drawings\202103330.0002.BR.PP.01.dgn

N.W. 1/4, SEC. 7, T 31 N, R 7 W
KEENER TOWNSHIP
JASPER COUNTY

LakeHoliday Enterprises, Inc.

Demotte 2014 LLC

S.W. 1/4, SEC. 18, T 31 N, R 7 W
KEENER TOWNSHIP
JASPER COUNTY

Anita Poteete

Anita & Jeffrey S. Poteete

Michael and Karen Haack

Randal & Kimberly Bostrom

Adam & Gina Jager

Arnulfo Barbara & Antonio Tiscareno

Christopher J. & Lisa A. Skala

Jeffery M. & Sherrie L. Drazen

App. P.L.

App. Exist. R/W

App. Exist. L.A. R/W

S.R. 10

N 89° 35' 17" E

Line "B"

Line "PR-NW"

Line "NECL-W"

Line "NWCL-W"

Line "WSI-W"

Line "SWCL-W"

Line "SECL-W"

Line "PR-SW"

Line "RAB-W"

Line "A"

App. ¼ Section Line

App. Section Line

Southbound I-65

Trees & Brush

Brush

Grass

Asphalt

Constr. Limits

BEGIN PROJECT
446+45.00 "B"

+45.00
20.48' LT.

+45.00
21.79' RT.

+50.00
15.00' LT.

+50.00
15.00' RT.

+50.00, 20.2' LT.

+50.0, 21.5' RT.

+34.84
15.00' LT.

CTO-1
3' Curb Turnout Req'd.

CTO-2
3' Curb Turnout Req'd.

CTO-3
3' Curb Turnout Req'd.
+30.0, 26.5' LT.

CTO-4
3' Curb Turnout Req'd.
+30.0, 16.4' RT.

CTO-5
3' Curb Turnout Req'd.
+87.5, 76.2' LT.

CTO-6
3' Curb Turnout Req'd.
+92.5, 79.6' RT.

CTO-100
3' Curb Turnout Req'd.
+75.0, 6.0' LT.

CTO-200
3' Curb Turnout Req'd.
+80.0, 21.3' RT.

CTO-201
3' Curb Turnout Req'd.
+30.0, 0.0' LT.

BEGIN CONSTRUCTION
10+00.00 "PR-NW"

P.C. 10+00.00 "PR-NW"=
P.T. 305+29.71 "NWCL-W"

+10.64 "NWCL-W"
0.09' LT.

END CONSTRUCTION
11+80.00 "PR-NW"

+80.00 "PR-NW"
6.95' LT.

+80.00 "PR-NW"
22.02' RT.

+30.00 "PR-NW"
16.00' RT.

+24.79 "PR-NW"
16.00' RT.

+50.06
0.00' LT.

+61.51
18.13' RT.

+66.86
27.38' LT.

+84.91
25.67' RT.

+64.58
24.25' RT.

+24.58
24.25' LT.

+29.40
24.00' LT.

+29.40
24.00' RT.

+24.58
24.25' RT.

BEGIN CONSTRUCTION
20+73.00 "PR-SW"

+73.00 "PR-SW"
5.39' LT.

+73.00 "PR-SW"
21.85' RT.

+23.00 "PR-SW"
0.00' RT.

+23.00 "PR-SW"
16.00' RT.

+58.00 "PR-SW"
16.00' RT.

END CONSTRUCTION
22+48.23 "PR-SW"

P.T. 22+48.23 "PR-SW"=
P.T. 105+08.74 "SWCL-W"

P.O.T. 454+90.70 "B"=
P.O.T. 127+13.90 "A"

SUSPEND DES. NO. 2600080
453+85.08 "B"

SUSPEND CONSTRUCTION &
BEGIN DES. NO. 2600080
453+64.58 "B"

18.7 TON of Revetment Riprap on 50.9 SYS of Geotextiles For Riprap, Type 2B

20.6 TON of Revetment Riprap on 55.9 SYS of Geotextiles For Riprap, Type 2B

10.7 TON of Revetment Riprap on 29.4 SYS of Geotextiles For Riprap, Type 2B

11.8 TON of Revetment Riprap on 32.4 SYS of Geotextiles For Riprap, Type 2B

11.1 TON of Revetment Riprap on 30.5 SYS of Geotextiles For Riprap, Type 2B

26.3 TON of Revetment Riprap on 70.9 SYS of Geotextiles For Riprap, Type 2B

25.2 TON of Revetment Riprap on 68.2 SYS of Geotextiles For Riprap, Type 2B

18.0 TON of Revetment Riprap on 49.0 SYS of Geotextiles For Riprap, Type 2B

145.7 LFT Guardrail Remove

183.2 LFT Guardrail Remove

Guardrail, MGS W-Beam, Cable Terminal Anchor

MGS Guardrail Transition With Curb Tie-in To Bridge Railing Transition

G.R.E.T., Type OS, MSKT, TL-2

Exit Radius 400'

Entry Radius 100'

Entry Radius 150'

Exit Radius 200'

Entry Radius 115'

Inscribed Circle Diameter 160'

R 3'-0"

R 5'-0"

R 46'-0"

20'-0"

18'-11"

19'-9"

17'-5"

17'-6"

18'-0"

14'-0"

20'-3"

15' app

LEGEND

(K) QC/QA-PCCP, 11", on
300 #/Syd. QC/QA-HMA, 4, 58E, Intermediate, OG, 19.0 mm, on
6" Compacted Aggregate No. 53, on
Subgrade Treatment, Type IC
(15' Transverse Joint Spacing with 1.5" Dowels and No. 6 Tie Bars for Longitudinal Joints with 14' Maximum Slab Width)

(K1) Jointed Reinforced Concrete Pavement, 12", on
Subbase for PCCP, on
Subgrade Treatment, Type IC, on
Geotextile for Pavement, Type 2B

(13) Curb, Integral Concrete (9" PCCP Depth)

(15) Curb, Integral Concrete (11" PCCP Depth) or
Inverted Curb, Integral Concrete (11" PCCP Depth)

(16) Curb, Integral Concrete, Modified, Roll Curb

(17) Curb, Integral, B, Concrete

(22) Concrete Center Curb, Type D

(26) Sodding

(27) Seed Mixture, Type R

(30) Guardrail, MGS, W-Beam, 6'-3" Spacing

(B) PCCP 9", on
13" Compacted Aggregate, No. 53, on
Subgrade Treatment, Type IC
(15' D-1 Contraction Joints Spacing with 1.25" Dowel Bars)

NOTES:
See Geometric Tie-In Details for Additional Alignment Information.

See Profile Sheets for Additional Construction Information.

All Stationing Described from Line "B" Unless Otherwise Noted.

See Bridge General Plan Sheets (DES NO. 2600080) for Expansion Lengths for Terminal Joints.

DATE	REVISION

FOR INFORMATION ONLY

REGINA G. SESSIONS
REGISTERED
No. 11500366
STATE OF INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL — Regina G. Sessions — 06/05/2026
DESIGN ENGINEER — DATE

DESIGNED: RRB | DRAWN: CAK
CHECKED: RGS | CHECKED: RGS

INDIANA
DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS
LINE "B"

HORIZONTAL SCALE	BRIDGE FILE
1" = 30'	N/A
VERTICAL SCALE	DESIGNATION
N/A	2000020
SURVEY BOOK	SHEETS
N/A	5 of 14
CONTRACT	CONTRACT
R-43918	

Indy-Prof.dftcfg
Indiana_Shade.tbl

bwhitehead 6/5/2026 5:30:46 PM P:\2021\03330\D. Drawings\202103330.0002.BR.CD.01.dgn

455

460

N.E. 1/4, SEC. 7, T 31 N, R 7 W
KEENER TOWNSHIP
JASPER COUNTY

TA Operating LLC

S.E. 1/4, SEC. 18, T 31 N, R 7 W
KEENER TOWNSHIP
JASPER COUNTY

Love's Travel Stops Country Stores, Inc.

Northbound I-65

S.R. 10
Line "B"

RESUME DES. NO. 2600080
455+96.31 "B"

RESUME CONSTRUCTION &
END DES. NO. 2600080
456+16.81 "B"

END PROJECT
463+65.00 "B"

CTO-301
3' Curb Turnout Req'd.
+45.0, 17.2' LT.

+50.00 "PR-NE"
17.46' LT.

+30.00 "PR-NE"
16.00' LT.

Line "PR-NE"

+50.00 "PR-NE"
8.85' RT.

END CONSTRUCTION
31+50.00 "PR-NE"
+00.00 "PR-NE"
0.00' RT.

Constr. Limits

16.0 TON of Revetment Riprap on
43.7 SYS of Geotextiles For
Riprap, Type 2B

+75.23 "PR-NE"
16.00' LT.

Constr. Limits

Exit Radius 400'

CTO-300
3' Curb Turnout Req'd.
+05.0, 0.0' RT.

13.3 TON of Revetment Riprap on
36.3 SYS of Geotextiles For
Riprap, Type 2B

App. Exist. L.A. R/W

26.2 TON of Revetment Riprap on
70.8 SYS of Geotextiles For
Riprap, Type 2B

CTO-7
3' Curb Turnout Req'd.
+88.5, 79.5' LT.

BEGIN CONSTRUCTION
30+00.00 "PR-NE"
P.C. 30+00.00 "PR-NE"=
P.C. 400+00.00 "NECL-E"
+11.83 "NECL-E"
0.00' LT.

Exit Radius 200'

Line "NWCL-E"

171.1 LFT Guardrail Remove

Constr. Limits

G.R.E.T., Type OS, MSKT, TL-2

Entry Radius 115'

Constr. Limits

20.0 TON of Revetment Riprap on
54.3 SYS of Geotextiles For
Riprap, Type 2B

+56.81
24.25' LT.

+52.00
24.00' LT.

+96.45
25.67' LT.

MGS Guardrail Transition With Curb
Tie-in To Bridge Railing Transition

+16.81
24.25' LT.

Line "RAB-E"

Line "NECL-E"

+27.30
0.00' LT.

+72.48
15.00' LT.

Line "ESI-E"

+42.04
19.43' LT.

+25.37
15.00' LT.

+35.00
15.00' LT.

N 89° 35' 17" E

+47.55
0.00' RT.

+46.52
15.00' RT.

+35.00
15.00' RT.

App. Section Line

Line "SECL-E"

Constr. Limits

12.3 TON of Revetment Riprap on
33.6 SYS of Geotextiles For
Riprap, Type 2B

CTO-10
3' Curb Turnout Req'd.

+50.0, 18.7' LT.

CTO-11
3' Curb Turnout Req'd.

+60.0, 23.0' LT.

+65.00
23.41' LT.

+65.00
27.64' RT.

+60.0, 19.1' RT.

CTO-12
3' Curb Turnout Req'd.

10.0 TON of Revetment Riprap on
27.7 SYS of Geotextiles For
Riprap, Type 2B

App. Exist. L.A. R/W

+52.00
24.25' RT.

+56.81
24.25' RT.

Constr. Limits

Guardrail, MGS W-Beam,
Cable Terminal Anchor

145.8 LFT Guardrail Remove

MGS Guardrail Transition With Curb
Tie-in To Bridge Railing Transition

+16.81
24.25' RT.

Entry Radius 150'

Line "SWCL-E"

+14.50
27.38' RT.

CTO-8
3' Curb Turnout Req'd.

+90.0, 75.3' LT.

Wetland A,
Do Not Disturb

END CONSTRUCTION
42+40.24 "PR-SE"
P.T. 42+40.24 "PR-SE"=
P.C. 200+00.00 "SECL-E"

Entry Radius 100'

Exit Radius 410'

+50.0, 26.8' RT.

CTO-9
3' Curb Turnout Req'd.

19.3 TON of Revetment Riprap on
52.5 SYS of Geotextiles For
Riprap, Type 2B

+95.18
16.00' LT.

Constr. Limits

+50.00
16.00' LT.

11.9 TON of Revetment Riprap on
32.6 SYS of Geotextiles For
Riprap, Type 2B

19.8 TON of Revetment Riprap on
53.8 SYS of Geotextiles For
Riprap, Type 2B

CTO-400
3' Curb Turnout Req'd.

+05.0, 17.0' LT.

+50.00 "PR-SE"
0.00' LT.

+00.00 "PR-SE"
7.97' RT.

+00.00 "PR-SE"
16.83' LT.

Line "PR-SE"

BEGIN CONSTRUCTION
41+00.00 "PR-SE"

Constr. Limits

Trees & Brush

Grass

Brush

Asphalt

Inscribed Circle Diameter 160'

R 5'-0"

R 46'-0"

R 3'-0"

17'-4"

17'-8"

20'-3"

19'-0"

19'-9"

14'-0"

18'-0"

LEGEND

(K) QC/QA-PCCP, 11", on
300 #/Syd. QC/QA-HMA, 4, 58E, Intermediate, OG, 19.0 mm, on
6" Compacted Aggregate No. 53, on
Subgrade Treatment, Type IC
(15' Transverse Joint Spacing with 1.5" Dowels and No. 6 Tie Bars
for Longitudinal Joints with 14' Maximum Slab Width)

(K1) Jointed Reinforced Concrete Pavement, 12", on
Subbase for PCCP, on
Subgrade Treatment, Type IC, on
Geotextile for Pavement, Type 2B

(13) Curb, Integral Concrete (9" PCCP Depth)

(15) Curb, Integral Concrete (11" PCCP Depth) or
Inverted Curb, Integral Concrete (11" PCCP Depth)

(16) Curb, Integral Concrete, Modified, Roll Curb

(17) Curb, Integral, B, Concrete

(22) Concrete Center Curb, Type D

(26) Sodding

(27) Seed Mixture, Type R

(30) Guardrail, MGS, W-Beam, 6'-3" Spacing

(B) PCCP 9", on
13" Compacted Aggregate, No. 53, on
Subgrade Treatment, Type IC
(15' D-1 Contraction Joints Spacing with 1.25" Dowel Bars)

NOTES:
See Geometric Tie-In Details for Additional Alignment Information.

See Profile Sheets for Additional Construction Information.

All Stationing Described from Line "B" Unless Otherwise Noted.

See Bridge General Plan Sheets (DES NO. 2600080)
for Expansion Lengths for Terminal Joints.

DATE	REVISION

FOR INFORMATION ONLY

REGINA G. SESSIONS
REGISTERED
No. 11500366
STATE OF INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL: Regina G. Sessions 06/05/2026
DESIGN ENGINEER DATE

DESIGNED: RRB DRAWN: CAK
CHECKED: RGS CHECKED: RGS


INDIANA
DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS
LINE "B"

HORIZONTAL SCALE	BRIDGE FILE
1" = 30'	N/A
VERTICAL SCALE	DESIGNATION
N/A	2000020
SURVEY BOOK	SHEETS
N/A	6 of 14
CONTRACT	CONTRACT
R-43918	

Indy-Pdf.pltcfg
Indiana_Shade.tbl

bwhitehead 6/5/2026 5:30:48 PM P:\2021\03330\D. Drawings\202103330.0002.BR.CD.02.dgn

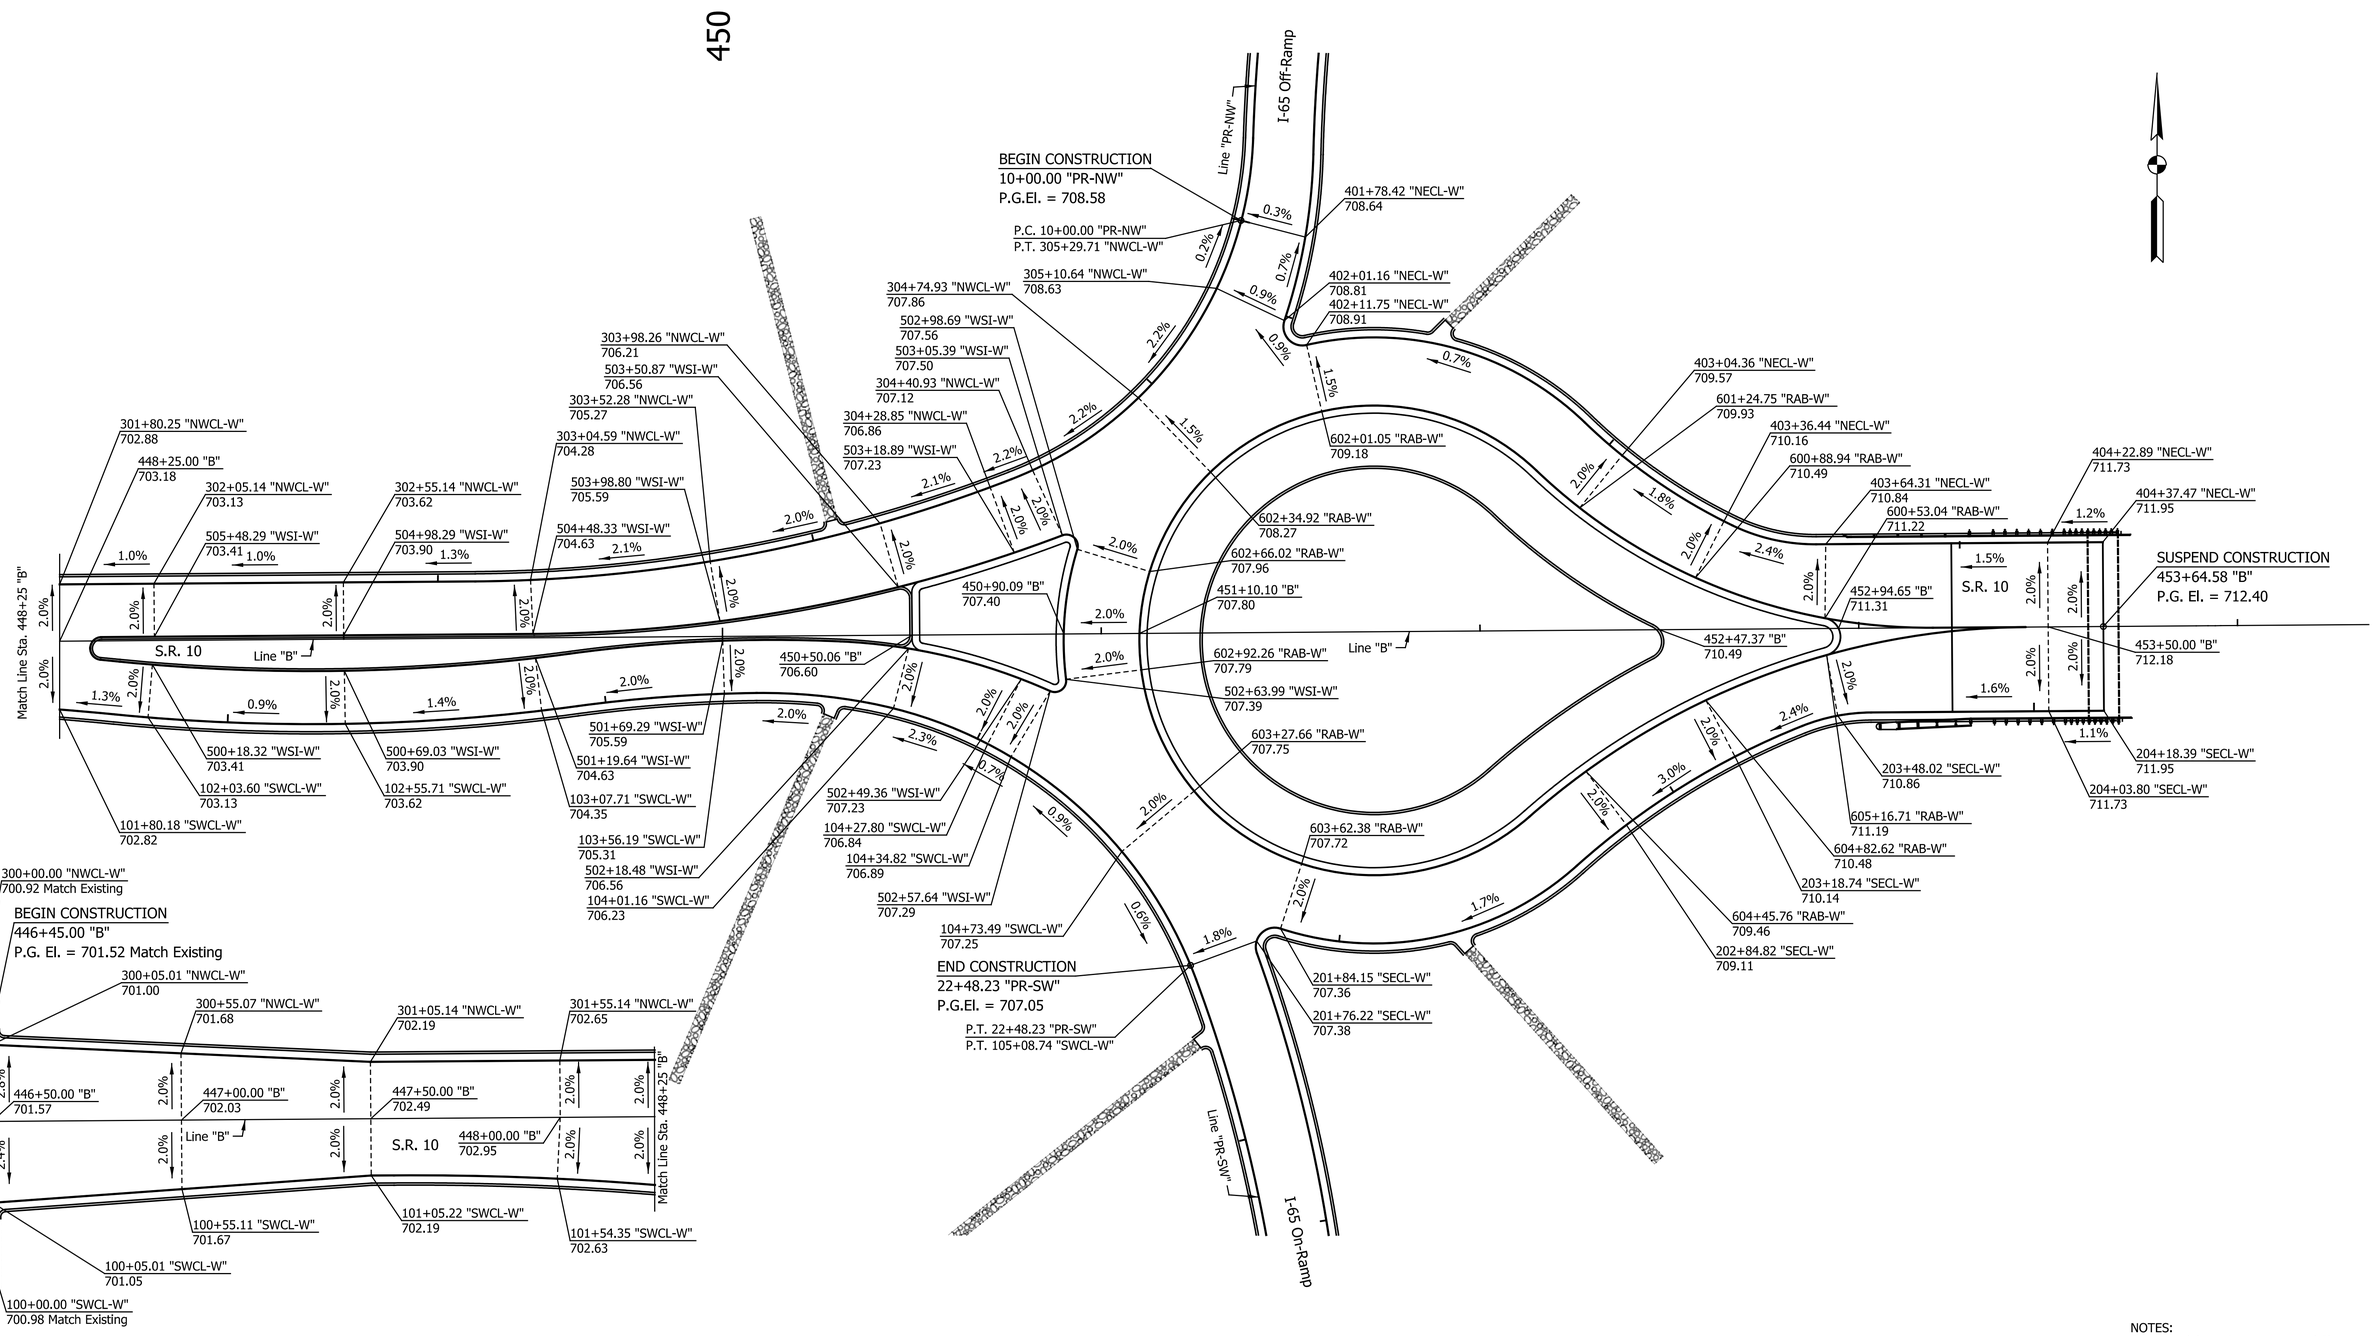

NOTES:
See Roundabout Geometric Detail Sheets for more Information.
All elevations shown at edge of pavement unless otherwise noted.

DATE	REVISION

FOR INFORMATION ONLY

REGINA G. SESSIONS — REGISTERED — No. 11500366 — STATE OF INDIANA — PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL: Regina G. Sessions — 06/05/2026
DESIGN ENGINEER — DATE

DESIGNED: RRB | DRAWN: CAK
CHECKED: RGS | CHECKED: RGS


INDIANA
DEPARTMENT OF TRANSPORTATION


SPOT ELEVATION DETAILS

HORIZONTAL SCALE	BRIDGE FILE
1" = 20'	N/A
VERTICAL SCALE	DESIGNATION
N/A	2000020
SURVEY BOOK	SHEETS
N/A	7 of 14
CONTRACT	CONTRACT
R-43918	

Indy-Pdf.dfcfg
Indiana_Shade.tbl

bwhitehead 6/5/2026 5:30:51 PM P:\2021\03330\D. Drawings\202103330.0002.BR.SE.01.dgn

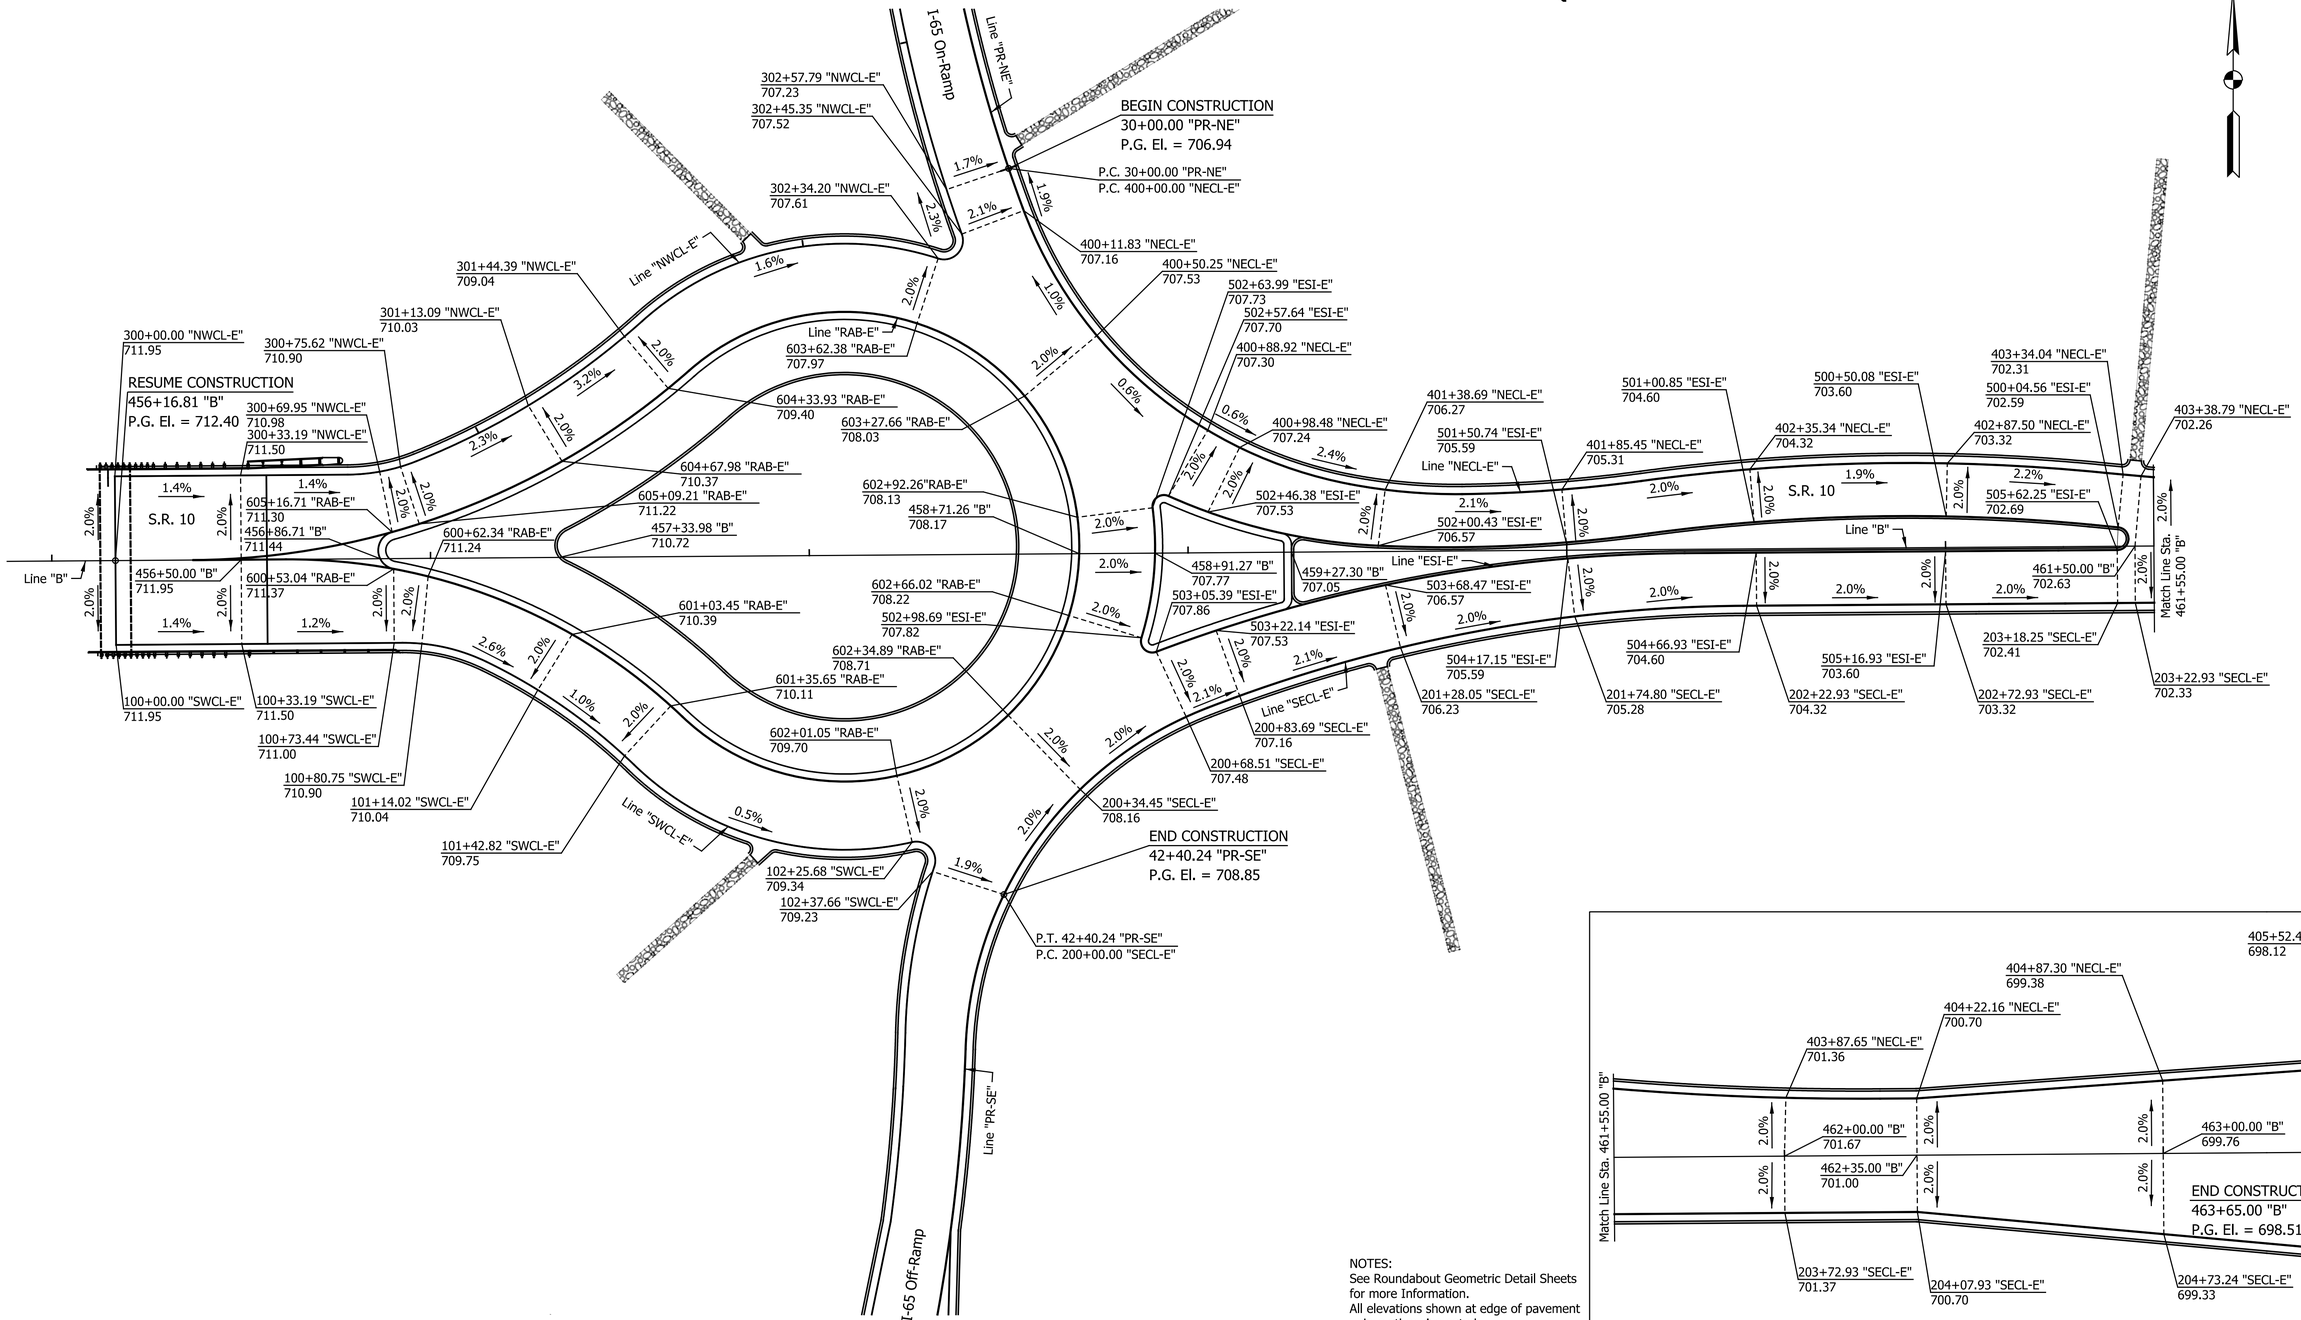

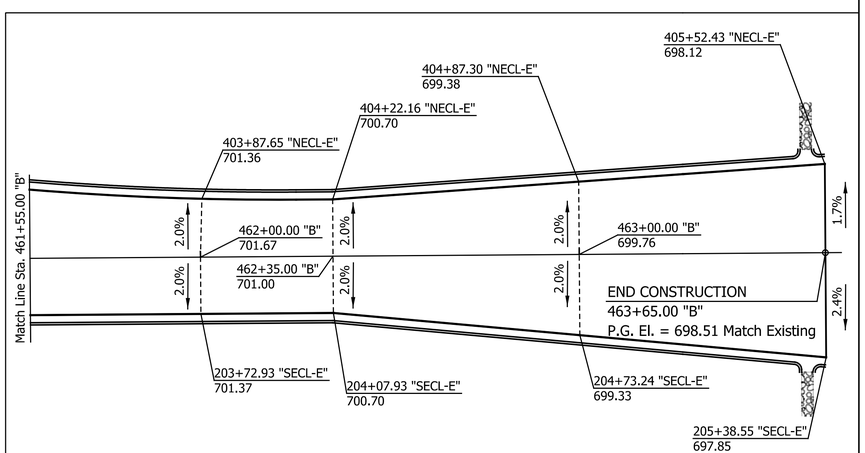

NOTES:
See Roundabout Geometric Detail Sheets for more Information.
All elevations shown at edge of pavement unless otherwise noted.

DATE	REVISION

FOR INFORMATION ONLY

REGINA G. SESSIONS REGISTERED No. 11500366 STATE OF INDIANA PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL: Regina G. Sessions — 06/05/2026
DESIGN ENGINEER — DATE

DESIGNED: RRB | DRAWN: CAK
CHECKED: RGS | CHECKED: RGS

INDIANA
DEPARTMENT OF TRANSPORTATION


SPOT ELEVATION DETAILS


HORIZONTAL SCALE	BRIDGE FILE
1" = 20'	N/A
VERTICAL SCALE	DESIGNATION
N/A	2000020
SURVEY BOOK	SHEETS
N/A	8 of 14
CONTRACT	CONTRACT
R-43918	

Indy-Ref.dgn
Indiana_Shade.tbl

bwhitehead 6/5/2026 5:30:52 PM P:\2021\03330\D. Drawings\202103330.0002.BR.SE.02.dgn

450

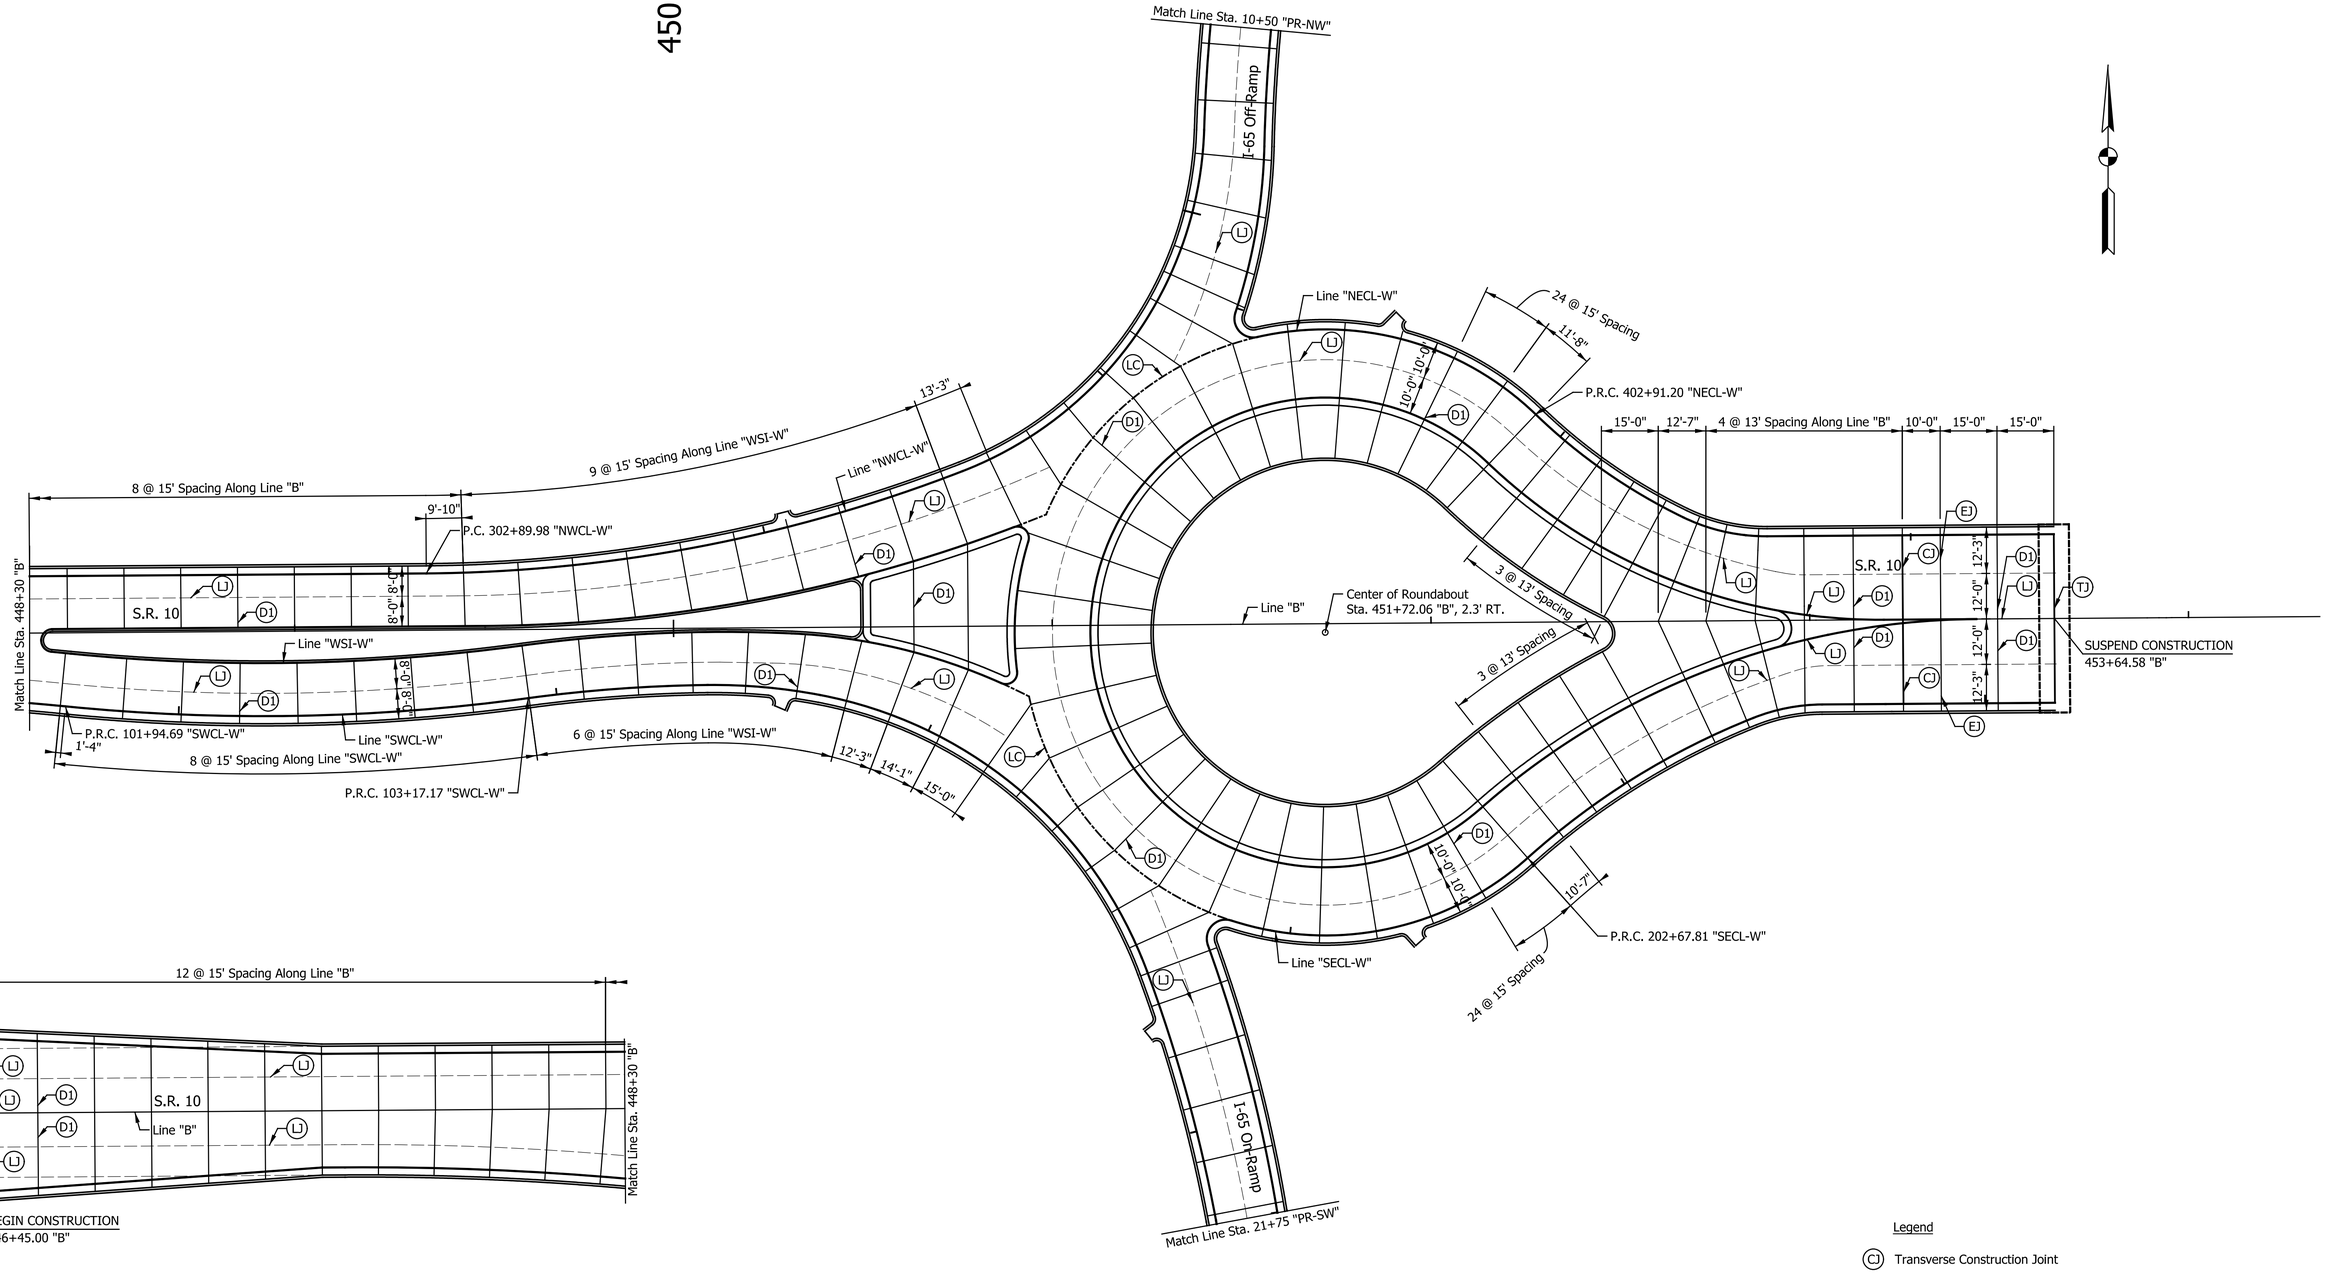

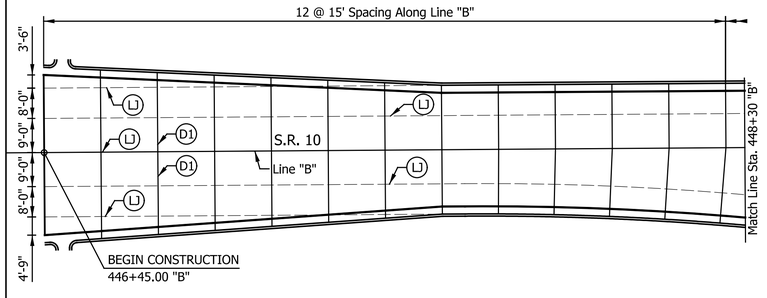

NOTES:
See Bridge General Plan Sheets (DES NO. 2600080)
for Expansion Lengths for Terminal Joints.

Legend

- (CJ) Transverse Construction Joint
- (D1) D1 Contraction Joint
- (EJ) Expansion Joint with Load Transfer
- (LC) Type PCF Joint w/Lean Concrete Base (Paid for as Terminal Joint, Type PCCP)
- (LJ) Longitudinal Joint or Longitudinal Construction Joint
- (TJ) Terminal Joint, Type PCCP

DATE	REVISION

FOR INFORMATION ONLY

REGINA G. SESSIONS
REGISTERED
No. 11500366
STATE OF INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL: Regina G. Sessions — DESIGN ENGINEER — 06/05/2026 DATE


DESIGNED: RRB | DRAWN: CAK | CHECKED: RGS | CHECKED: RGS


INDIANA
DEPARTMENT OF TRANSPORTATION

CONCRETE JOINT DETAILS
WEST ROUNDABOUT

HORIZONTAL SCALE	BRIDGE FILE
1" = 20'	N/A
VERTICAL SCALE	DESIGNATION
N/A	2000020
SURVEY BOOK	SHEETS
N/A	9 of 14
CONTRACT	CONTRACT
R-43918	

Indy-Prof.dfcfg
Indiana_Shade.tbl

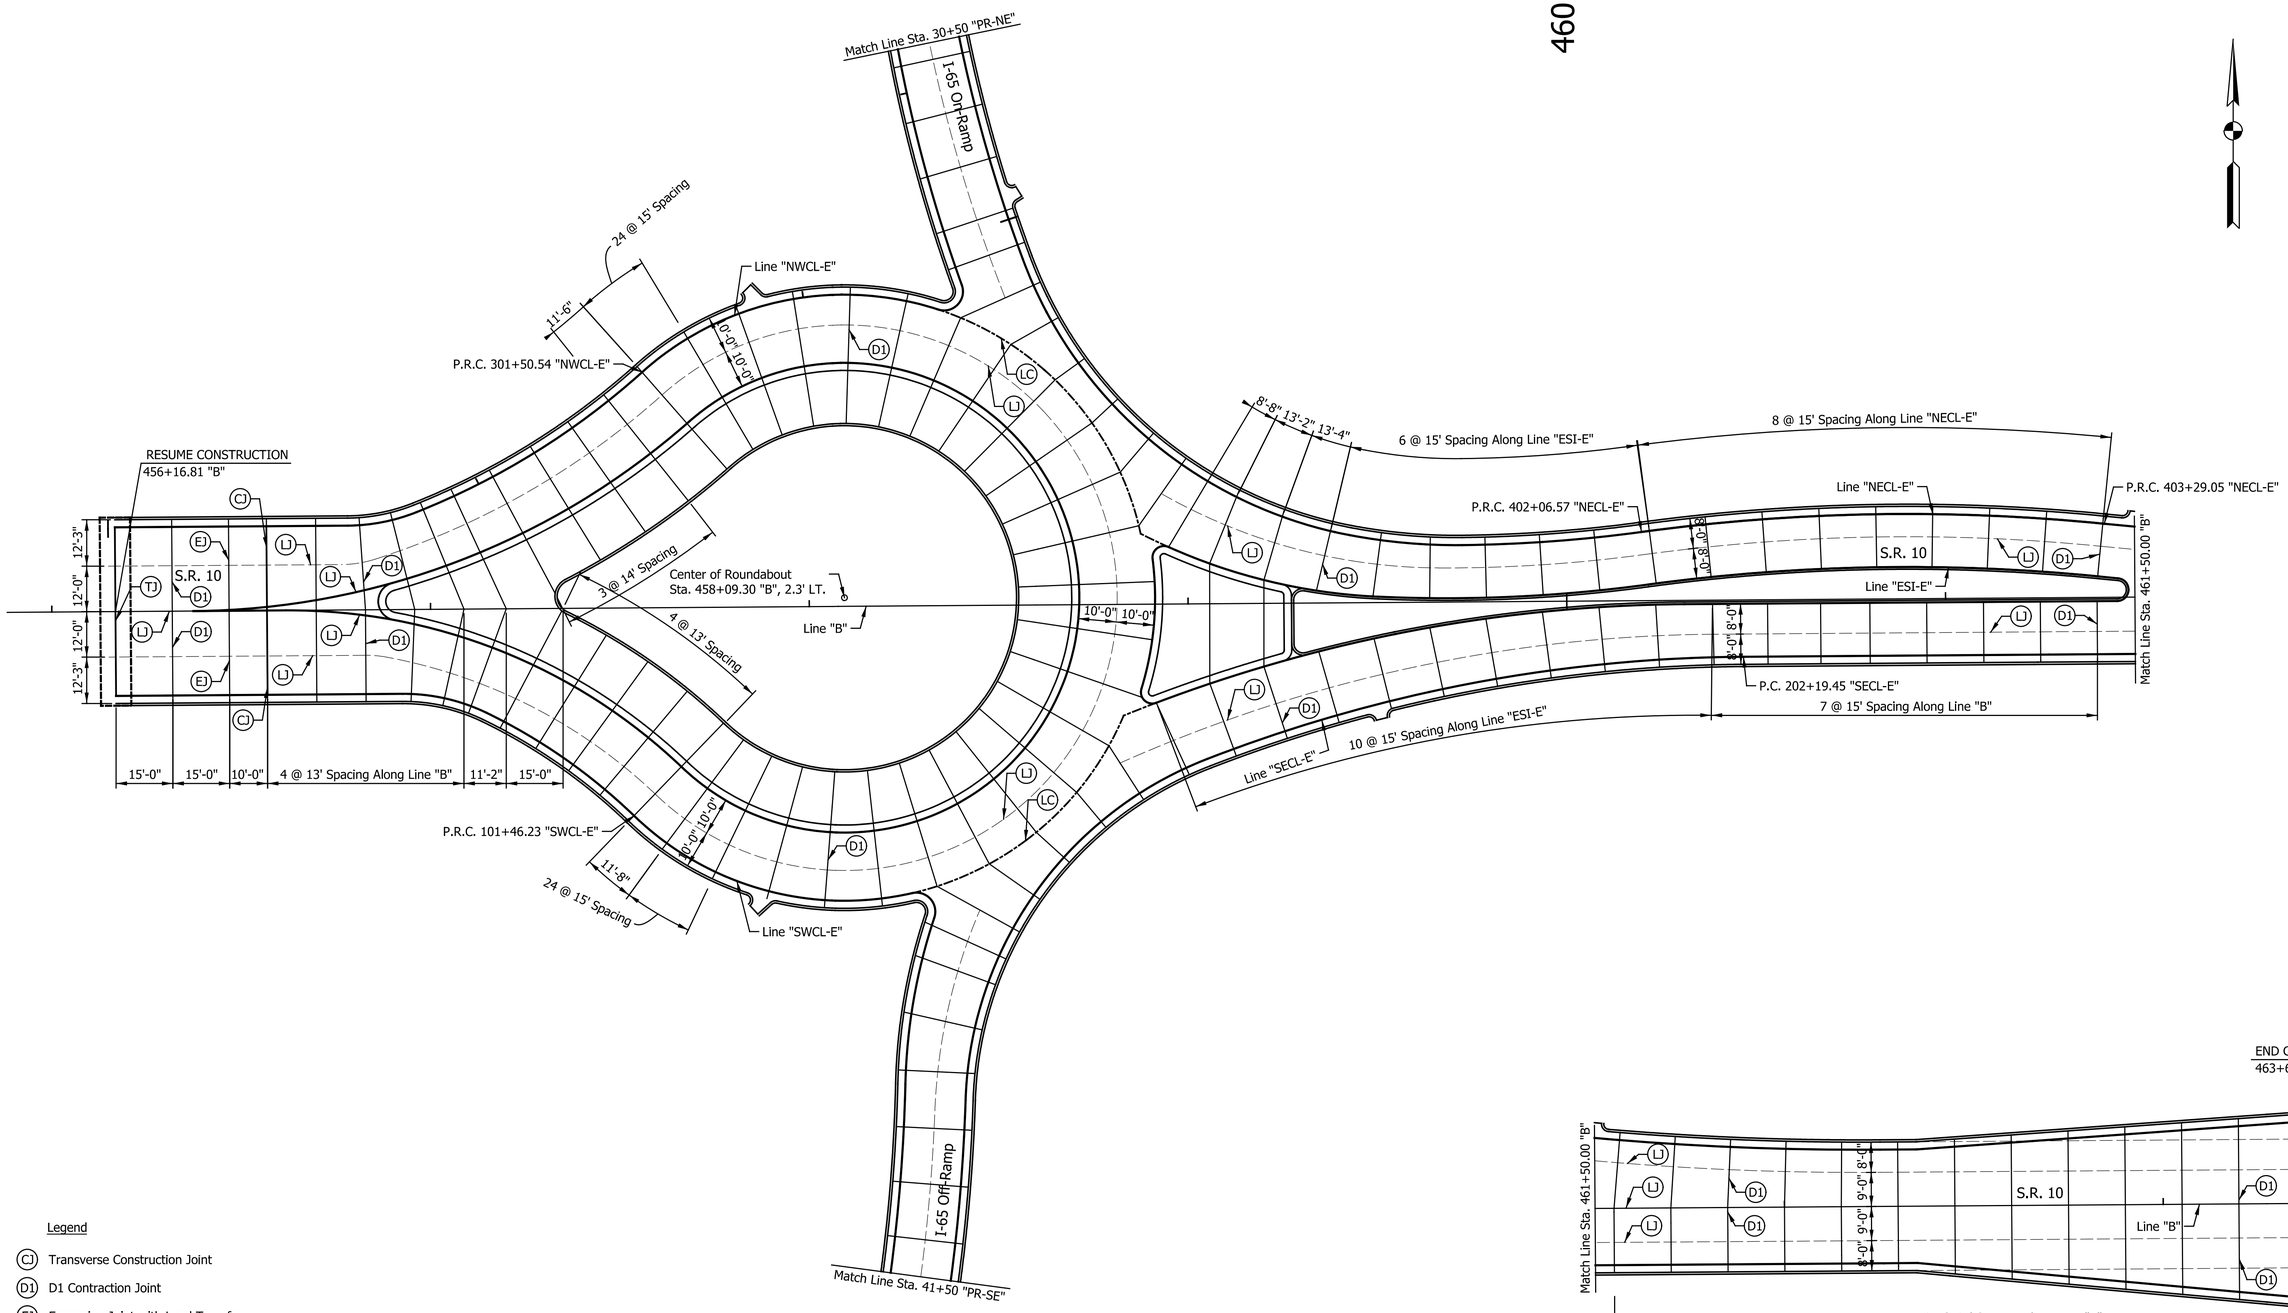

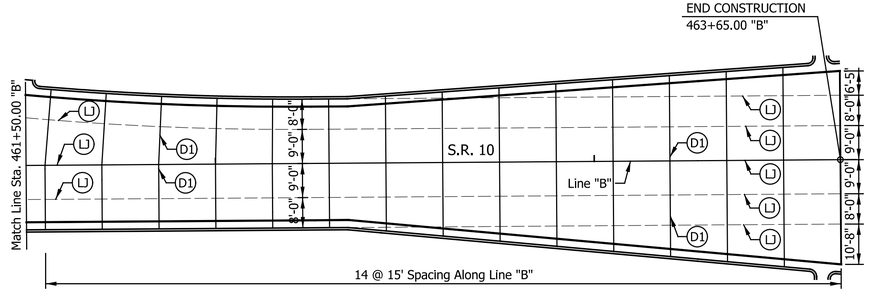

Legend

- (CJ) Transverse Construction Joint
- (D1) D1 Contraction Joint
- (EJ) Expansion Joint with Load Transfer
- (LC) Type PCF Joint w/Lean Concrete Base (Paid for as Terminal Joint, Type PCCP)
- (LJ) Longitudinal Joint or Longitudinal Construction Joint
- (TJ) Terminal Joint, Type PCCP

NOTES:
See Bridge General Plan Sheets (DES NO. 2600080) for Expansion Lengths for Terminal Joints.

DATE	REVISION

FOR INFORMATION ONLY

REGINA G. SESSIONS — REGISTERED — No. 11500366 — STATE OF INDIANA — PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL: Regina G. Sessions — DESIGN ENGINEER — 06/05/2026 DATE


DESIGNED: RRB | DRAWN: CAK | CHECKED: RGS | CHECKED: RGS

INDIANA
DEPARTMENT OF TRANSPORTATION


CONCRETE JOINT DETAILS
EAST ROUNDABOUT

HORIZONTAL SCALE	BRIDGE FILE
1" = 20'	N/A
VERTICAL SCALE	DESIGNATION
N/A	2000020
SURVEY BOOK	SHEETS
N/A	10 of 14
CONTRACT	CONTRACT
R-43918	

Existing Structure Built to a 213.25' V.C.

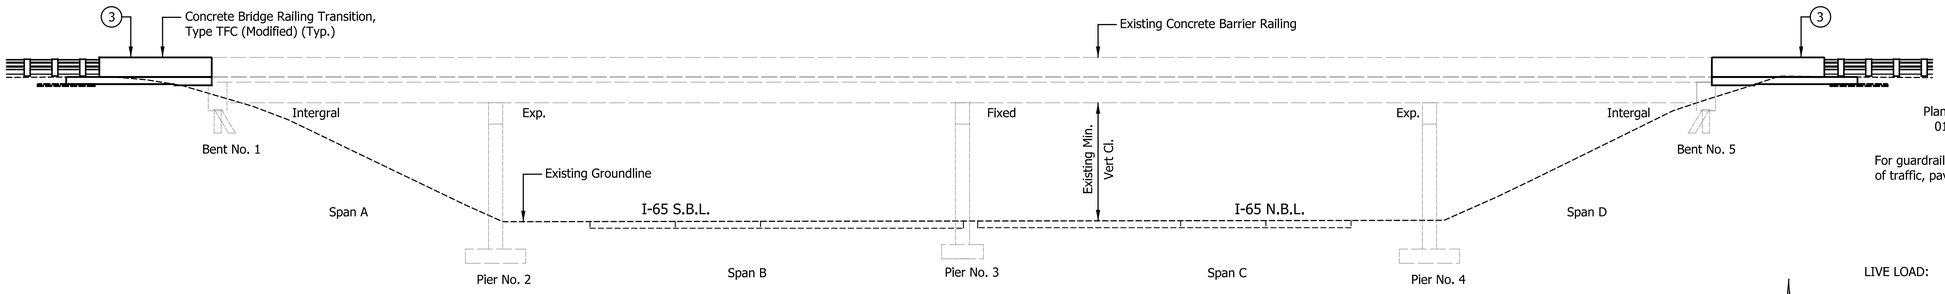

ELEVATION

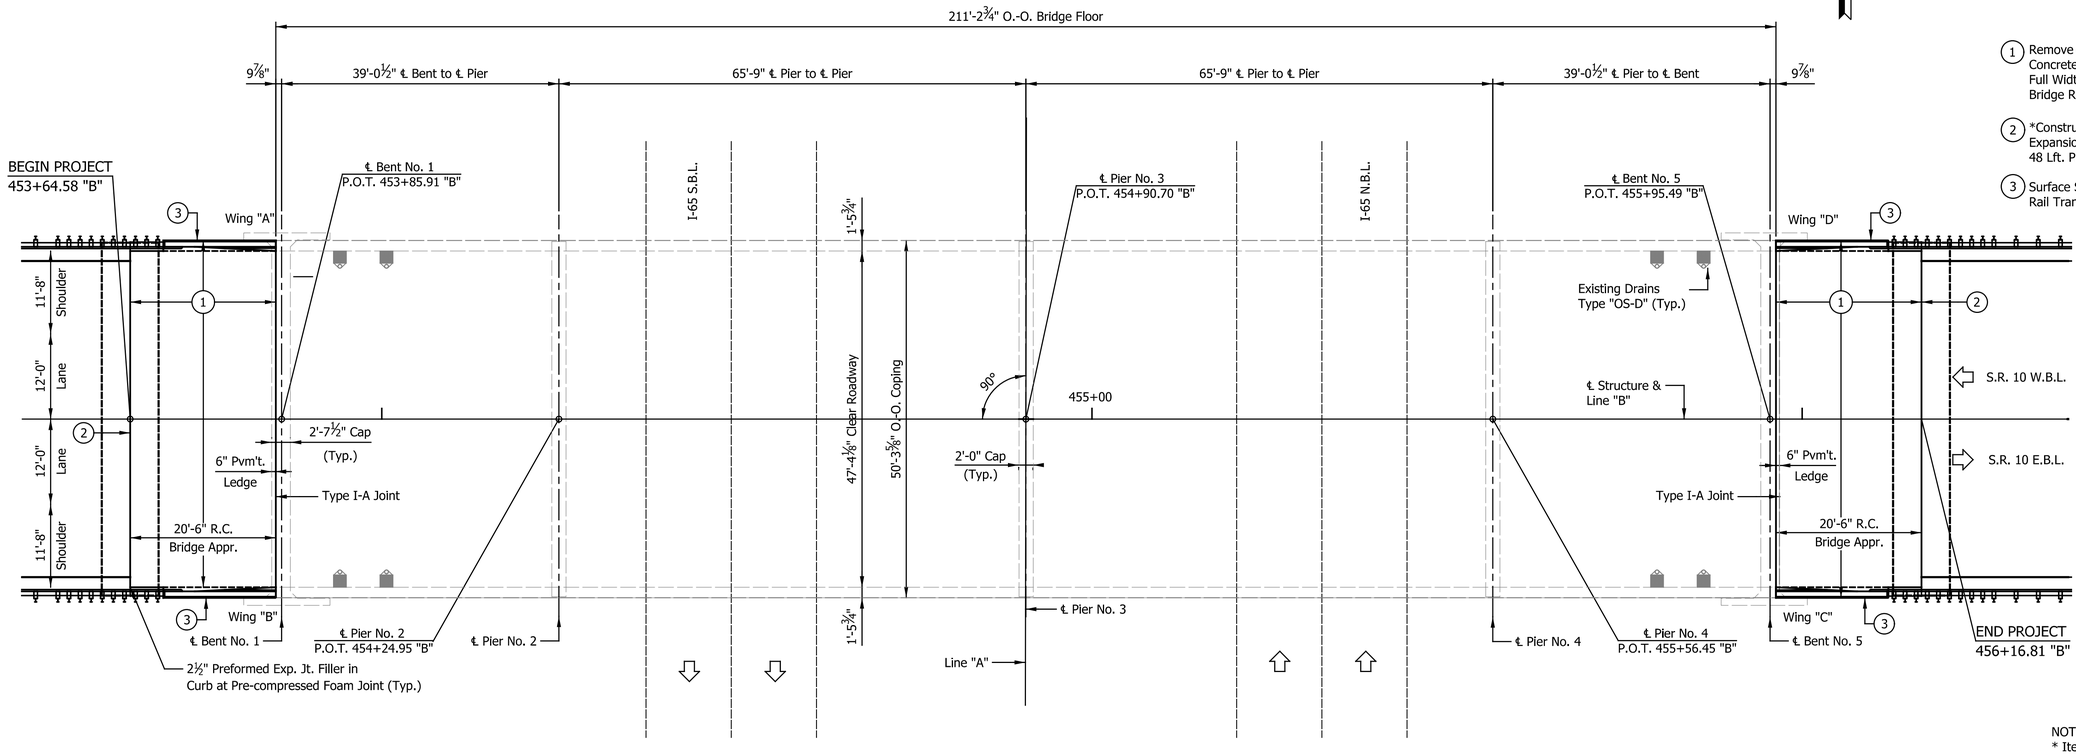

PLAN

GENERAL NOTES

Stationing is based on Road Plans Designation No. 2000020.

Plans for the existing structure are on file with INDOT as Bridge File 010-B-4888, 010-37-4888A, 010-37-4888B, and 010-37-04888C and are available upon request.

For guardrail limits, alignment references, benchmarks, topo references, maintenance of traffic, pavement markings, pavement joint details, and erosion control details, see Road Plans Designation No. 2000020.

DESIGN DATA

LIVE LOAD:	Originally designed for HS20-44 with impact and distribution of loads in accordance with 1992 AASTHO Specifications.
DEAD LOAD:	Actual Weight plus 35 Lbs./Sft. for future wearing surface and 15 Lbs./Sft. for SIP forms.
STRUCTRAL DEPTH:	6 1/2"
UNIT STRESSES:	Reinforcing Steel, f's = 20,000 psi Concrete Class C, f'c = 1,200 psi

(Stresses only apply to concrete elements from original structure.)

LEGEND

1. Remove existing R.C. Bridge Approach and existing Concrete Bridge Railing Transitions. Construct new Full Width R.C. Bridge Approach with Concrete Bridge Railing Transitions Type TFC (Modified).
2. *Construct Terminal Joints, Type PCCP. Expansion Length = 105' 7 3/8" 48 Lft. Pre-Compressed Foam Joint. (Per Location)
3. Surface Seal the new Concrete Bridge Rail Transitions.

NOTES:
* Item to be included with Road Plans

CONTINUOUS COMPOSITE STEEL BEAM BRIDGE

4 SPANS: 39'-0½", 65'-9", 65'-9", 39'-0½" SKEW: SQUARE CLEAR ROADWAY: 47'-4⅛"
S.R. 10 OVER I-65
JASPER COUNTY

DATE	REVISION

LOUIS J. McNICHOLAS REGISTERED No. PE11400383 STATE OF INDIANA PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Thomas J. McNicholas 06/04/2026
DESIGN ENGINEER DATE

DESIGNED: MKA DRAWN: MKA
CHECKED: TJM CHECKED: TJM

INDIANA
DEPARTMENT OF TRANSPORTATION


GENERAL PLAN

HORIZONTAL SCALE	BRIDGE FILE
3/32"=1'-0"	010-37-04888C
VERTICAL SCALE	DESIGNATION
3/32"=1'-0"	2600080

SHEETS 11 of 14
CONTRACT R-43918

Indy-Prof.dftcfg
Indiana_Shade.tbl

bwhitehead 6/5/2026 5:30:55 PM P:\2021\03330\D. Drawings\202103330.0002.BR.GPL.01.dgn

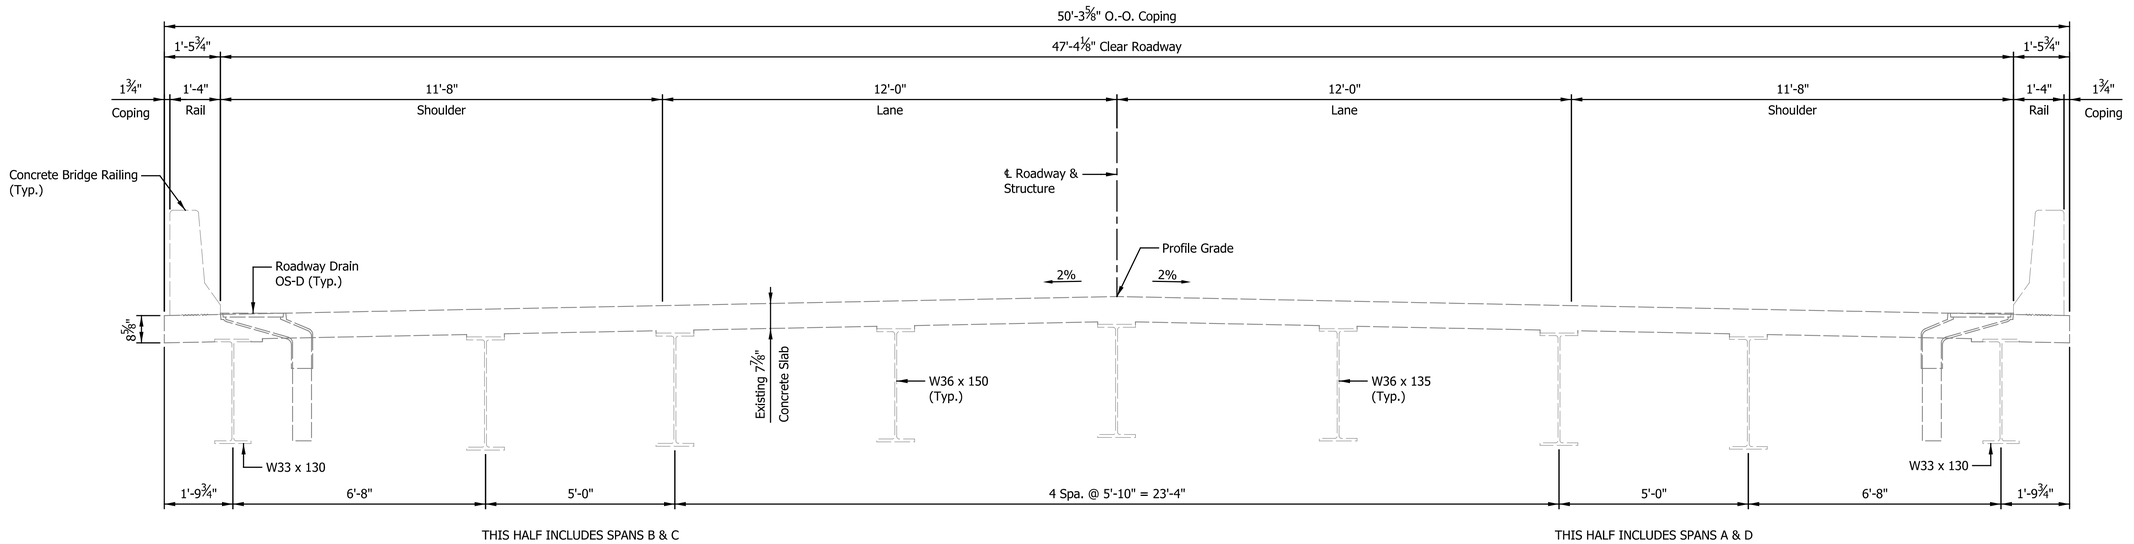

EXISTING TYPICAL SECTION

CONTINUOUS COMPOSITE STEEL BEAM BRIDGE

4 SPANS: 39'-0½", 65'-9", 65'-9", 39'-0½" SKEW: SQUARE CLEAR ROADWAY: 47'-4⅛"
S.R. 10 OVER I-65
JASPER COUNTY

DATE	REVISION

THOMAS J. McNICHOLAS
REGISTERED
No. PE11400383
STATE OF INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL: Thomas J. McNicholas — 06/04/2026
DESIGN ENGINEER — DATE

DESIGNED: MKA DRAWN: MKA
CHECKED: TJM CHECKED: TJM

INDIANA
DEPARTMENT OF TRANSPORTATION


GENERAL PLAN

HORIZONTAL SCALE	BRIDGE FILE
1/2"-1'-0"	010-37-04888C
VERTICAL SCALE	DESIGNATION
1/2"-1'-0"	2600080

SHEETS: 12 of 14
CONTRACT: R-43918


Indy-Pelf.dfcfg
Indiana_Shade.tbl

bwhitehead 6/5/2026 5:30:57 PM P:\2021\03330\D. Drawings\202103330.0002.BR.GPL.02.dgn

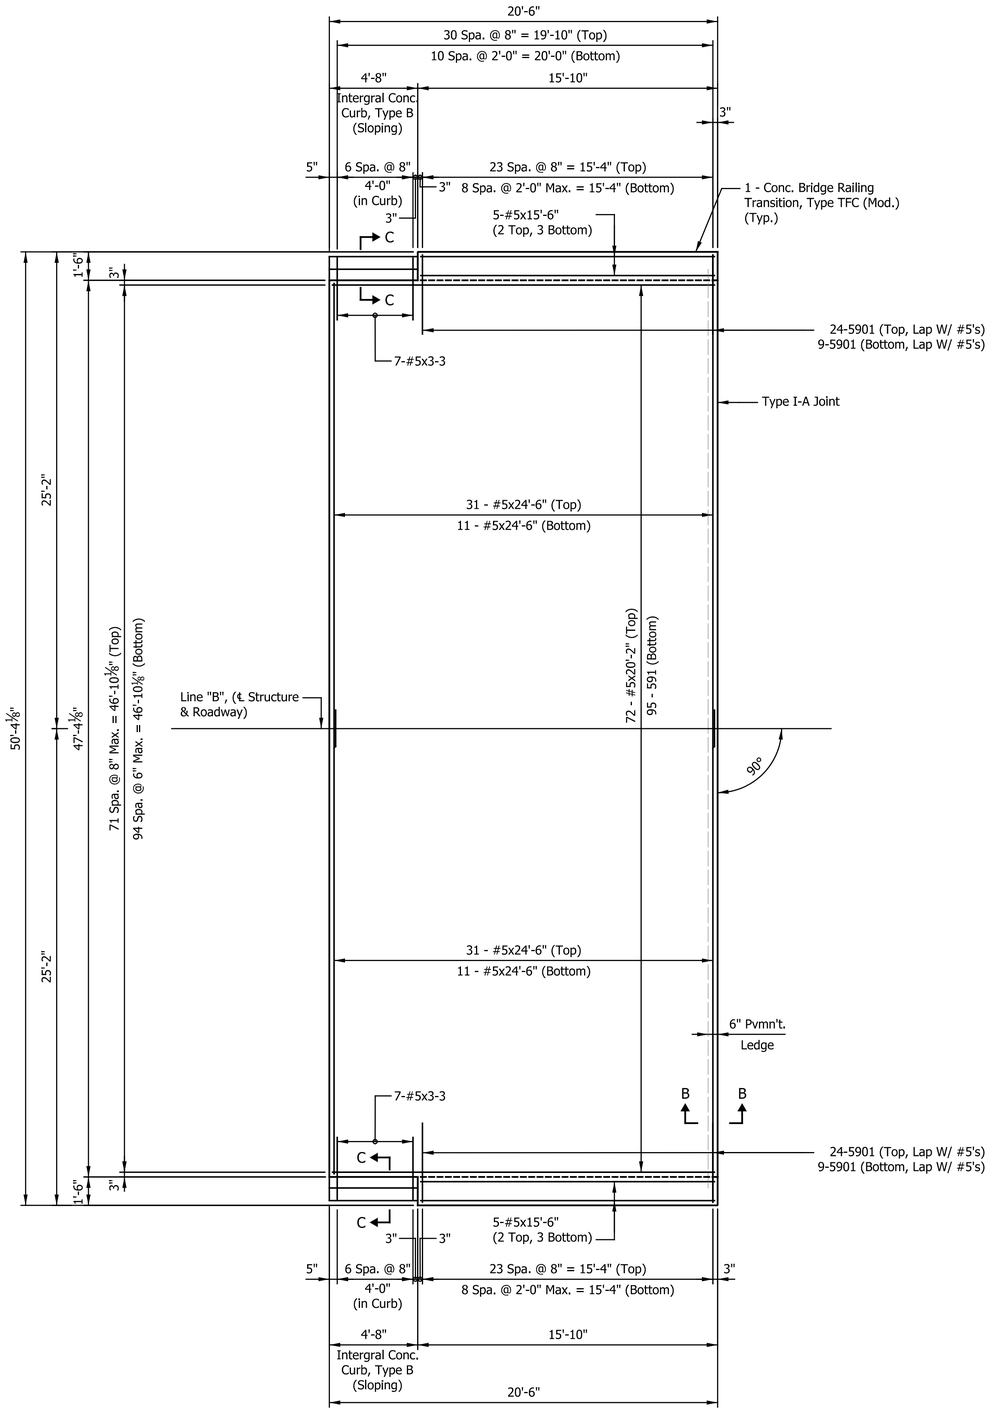


PLAN @ BENT NO. 1

(Bent No. 5 Same 180° Rotation)

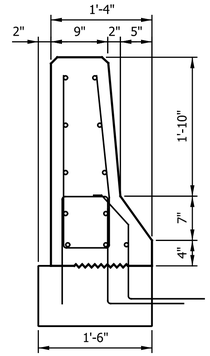


SECTION A-A

Scale: 1" = 1'-0"




Mark	A	Length
591	20'-2"	20'-9"
5901	3'-9"	4'-4"

Min. Lap	
#5	2'-0"

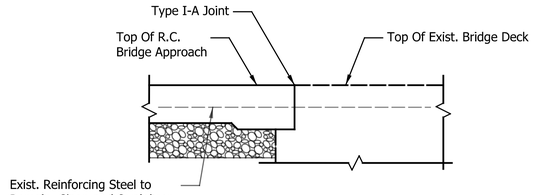

SECTION B-B

No to Scale

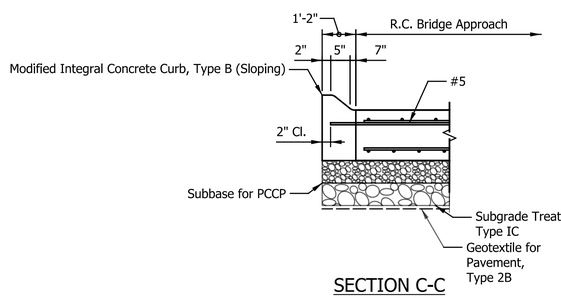

SECTION C-C

Not to Scale

R.C. BRIDGE APPROACH BENT NO. 1 BILL OF MATERIALS (BENT NO. 5 SAME)

Epoxy Coated Reinforcing Steel			
Size And Mark	No. of Bars	Length (Feet)	Weight (Lbs.)
591	95	20'-9"	
5901	66	4'-4"	
#5	10	15'-6"	
#5	72	20'-2"	
#5	84	24'-6"	
#5	14	3'-3"	
Total No. 5			6225
Bridge Railing Transition, TFC			
Epoxy Coated Reinforcing Steel			1102
Total Epoxy Coated Reinforcing Steel			7327
Concrete			
Reinf. Concrete Bridge Approach,			114.0 Sys.
Conc. Br. Railing Trans., TFC, Mod.			2 Each
Miscellaneous			
Geotextile for Pavement, Type 2B			115 Sys.
Subbase for PCCP			24 Cys.
Longitudinal Grooving			108 Sys.
Surface Seal			200 Sft.
Intergral Conc. Curb, Type B, Mod.			10 Lft.
Subgrade Treatment, Type IC			115 Sys.

NOTES:

For Reinforcing Bar Notes, see Standard Drawing E703-BRST-01.

All reinforcing steel to be epoxy coated.

For Location of Section A-A and Additional Bridge Railing Transition Details, see Standard Drawings E706-TTFC-01 thru -03.

For Type IA Joint Installation Details, see Standard Drawing E609-BRJT-01.

For section through Approach Slab and additional details, see Standard Drawings E609-RCBA-01 thru -04.

For RCBA Extension Slab Details, see Standard Drawings E609-TBAE-01 thru -03.

For Modified Integral Concrete Curb Type B (Sloping) Additional Details, see Standard Drawing E 605-CCIN-01

For Terminal Joint Details, see Standard Drawings E503-BATJ-01 & -02.

DATE	REVISION

THOMAS J. McNICHOLAS REGISTERED No. PE11400383 STATE OF INDIANA PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL: Thomas J. McNicholas — 06/04/2026
DESIGN ENGINEER — DATE

INDIANA DEPARTMENT OF TRANSPORTATION

HORIZONTAL SCALE	BRIDGE FILE
1/4"=1-0"	010-37-04888C
VERTICAL SCALE	DESIGNATION
1/4"=1-0"	2600080

DESIGNED: MKA	DRAWN: MKA
CHECKED: TJM	CHECKED: TJM

R.C. BRIDGE APPROACH DETAILS

SHEETS: 13 of 14
CONTRACT: R-43918

Indy-Brif.dftcfg
Indiana_Shade.tbl

bwhitehead 6/5/2026 5:31:00 PM P:\2021\03330\D. Drawings\202103330.0002.BR.APR.01.dgn

SUMMARY OF BRIDGE QUANTITIES

ITEM	CONCRETE				RAILING CONCRETE, FC	CONC. BR. RAILING TRAN., TFC, MOD.	RAILING, PS-2	REINF. CONC. BRIDGE APPR., 10"	REINF. CONC. BRIDGE APPR., 12"	SUBBASE FOR PCCP	REINF. STEEL	EPOXY COATED REINF. STEEL	STRUC-TURAL STEEL ***	ANCHOR PLATE	PILES											EXP. JOINT TYPE SS	CONC. STR. MEMBERS		ANCHOR BOLT	SUBGRADE TREAT-MENT, TYPE IC	INT. CONC. CURB, TYPE B, MOD.	CONDUIT, PVC, 4"	SURFACE SEAL *	THREADED TIE BAR ASSEMBLY	FIELD DRILLED HOLES	GEOTEX-TILE FOR PAVEMENT TYPE 2B	LONGI-TUDINAL GROOVING
	CLASS C SUPERSTR.	CLASS A SUBSTR.	CLASS B FOOTINGS	CLASS C SUBSTR.											EPOXY COATED SHELLS		TEST, DYNAMIC, PRODUCTION		CONC., STEEL SHELL ENCASED		STEEL H		SHOE, HP ??x??	SLEEVES	TEST PILE, DYNAMIC, RESTRIKE	CORED HOLE IN ROCK, 18"			BOX BEAM TYPE & SIZE	I BEAM TYPE & SIZE								
	CYS.	CYS.	CYS.	CYS.	LFT.	EACH	LFT.	SYS.	SYS.	CYS.	LBS.	LBS.	LBS.	EACH	NO.	LFT.	NO.	LFT.	NO.	LFT.	NO.	LFT.	EACH	EACH	EACH	NO.	LFT.	LFT.	LFT.	EACH	SYS.	LFT.	LFT.	SFT.	EACH	EACH	SYS.	SYS.
SUPERSTRUCTURE																																					
R.C. BRIDGE APPROACHES																																					
Bent No. 1						2			114	24		7327																		115	10		200			115	108
Bent No. 2						2			114	24		7327																		115	10		200			115	108
TOTALS						4			228	48		14654																		230	20		400			230	216

PAVEMENT QUANTITIES AND APPROACH TABLE

	LOCATION LINE "B"	DESCRIPTION	WIDTH	RADII	GRADE	LENGTH	DISTANCE BEYOND R/W FT.	EXCAVATION (CYS.)		MAINLINE 9.5 mm, HMA SURFACE	INTERMEDIATE 19.0 mm, MAINLINE HMA	HMA BASE 25.0 mm, MAINLINE	ASPHALT FOR TACK COAT	ASPHALT FOR PRIME COAT	CONCRETE CURB	PAVEMENT REMOVAL
LT/RT	STATION		FT.	FT.	%	FT.		CUT	FILL	? LBS./SYD.	? LBS./SYD.	? LBS./SYD.	TONS	TONS	SYS.	SYS.
	453+64.58 to 456+16.81	RCBAs	47.34					70								225

PAVED SIDE DITCH, RIPRAP DITCH AND SODDING SUMMARY

LT. OR RT.	STATION TO STATION	PAVED SIDE DITCH (LIN. FT.)								SODDING (SQ. YDS.)				RIPRAP	
		TYPE	PAY LENGTH	NO. OF LUGS	PAY LENGTH	CUT OFF WALLS	PAY LENGTH	TOTAL PAY LENGTH	FOR PSD	FOR DITCHES	SHOULDERS	OTHER	TOTAL SOD	REVETMENT TONS	GEOTEXTILES SQ. YD.

STRUCTURE SUMMARY

STRUCTURE NUMBER	LOCATION	LEFT	RIGHT	CROSS	SIZE	DESCRIPTION TYPE	DESCRIPTION MANHOLE, INLET, CATCH BASIN, OR SPECIALTY STRUCTURE	LENGTH	SKEW	FLOW LINE COVER	FLOW LINE UP STREAM	FLOW LINE DOWN STREAM	CONC. CL. A IN STRS.	STRUCTURE BACKFILL	METHOD OF BACKFILL	THICKNESS STEEL**	THICKNESS ALUM.**	VELOCITY	RIPRAP	PIPE END SECTION	REINF. STEEL	REMARKS
					INCHES			FT.		FT.	ELEV.	ELEV.	CU. YDS.	CU. YDS.					SYS.	EACH	LBS.	
																						Total Of Reinf. Steel Carried To "Structure Quantities"

TEMPORARY EROSION AND SEDIMENT CONTROL SUMMARY

LT. OR RT.	STATION TO STATION	TEMPORARY SILT FENCE LIN. FT.	DRAINAGE BARRIER LIN. FT.	INTERCEPTOR DITCH LIN. FT.	SLOPE DRAIN LIN. FT.	STRAW BALE DITCH CHK LIN. FT.	RIPRAP DITCH CHK LIN. FT.	SEDIMENT TRAP CU. YDS.	SEDIMENT CU. YDS. BASIN	CULVERT PIPE PROTECTION EACH	DROP INLET PROTECTION EACH	EACH PROTECTION CURB INLET
	TOTALS											

GUARDRAIL SUMMARY TABLE

LOCATION FROM STATION	LOCATION TO STATION	LOCATION LT. OR RT.	W-BEAM GUARDRAIL LENGTH AT 6'-3 SPA. STANDARD POST	W-BEAM GUARDRAIL LENGTH STANDARD POST AT ___ SPA.	W-BEAM GUARDRAIL LENGTH STANDARD POST AT ___ SPA.	W-BEAM GUARDRAIL LENGTH NESTED GUARDRAIL	FLARE RATE GUARDRAIL	GUARDRAIL TRANSITION TYPE	GUARDRAIL TRANSITION EACH	GUARDRAIL END TREATMENT TYPE	GUARDRAIL END TREATMENT EACH	CURVED W-BEAM GUARDRAIL SYSTEM TERMINAL SYSTEM	CURVED W-BEAM GUARDRAIL SYSTEM CONNECTOR SYSTEM	GUARDRAIL REMOVE	RESET GUARDRAIL	REMARKS
			LIN. FT.	LIN. FT.	LIN. FT.	LIN. FT.		TYPE	EACH	TYPE	EACH	TYPE	EACH	TYPE	EACH	LIN. FT.	LIN. FT.	
	TOTALS																	

RESET MAILBOX TABLE

LOCATION	LEFT	RIGHT	SINGLE	DOUBLE
TOTALS				

REVISIONS

DATE	ITEM

NOTES :

Weight of Spirals includes weight of 1½ extra turns top and bottom.

Spacers and 1½ turns at laps included in cost of Spiral.

* Estimated Quantity, to be paid for as "LSUM".

** If the Contractor elects to use metal pipe, the thickness shall be as shown in the Approach Quantity Table.

*** The weight of structural steel is approximate only, and it shall be the Contractor's responsibility to determine the weight on which he bases his bid.

For Test Bar Samples, see Bridge Standard 703-BRST-01.

DATE	REVISION

THOMAS J. McNICHOLAS REGISTERED No. PE11400383 STATE OF INDIANA PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL Thomas J. McNicholas 06/04/2026
DESIGN ENGINEER DATE

DESIGNED: MKA DRAWN: MKA
CHECKED: TJM CHECKED: TJM

INDIANA DEPARTMENT OF TRANSPORTATION

BRIDGE SUMMARY OF QUANTITIES

HORIZONTAL SCALE	BRIDGE FILE
NONE	010-37-4888C
VERTICAL SCALE	DESIGNATION
NONE	2600080
	SHEETS
	14 of 14
	CONTRACT
	R-43918

Indy-Prof.dfcfg
Indiana_Shade.tbl

bwhitehead 6/5/2026 5:31:06 PM P:\2021\03330\D. Drawings\202103330.0002.BR.SUM.dgn