

PRODUCT DATASHEET



ADEPT-5433

PRODUCT DESCRIPTION

Adept-5433 is a high-performance UHF RFID inlay designed for high-performance applications. It delivers reliable performance even on difficult-to-tag materials such as apparel, cardboard, plastic, plastic crates, and other low-detuning surfaces commonly found in dense or close-coupling environments.

With a compact antenna size of 50x30 mm, the inlay can be easily converted into a variety of end-application formats. It is available in wet inlay and label/sticker formats, enabling flexible integration across different tagging requirements.

PRODUCT IMAGE



APPLICATIONS



Retails





Item Level Traceability



Warehouse & Inventory

TEST REPORT

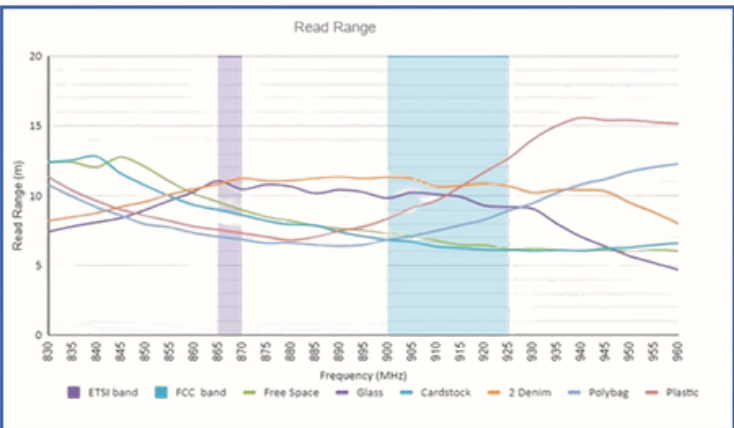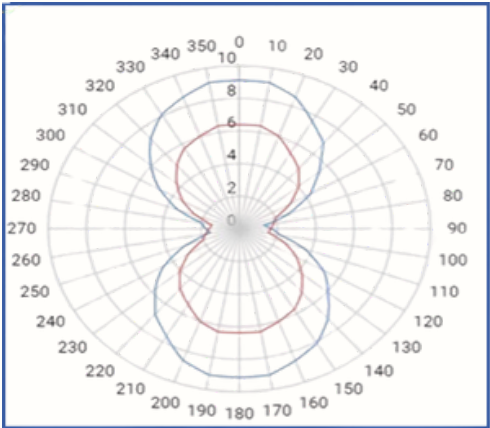

TECHNICAL DETAILS

Physical Specification		RFID Specification	
Inlay size	50 mm X 30 mm	Operating mode	Passive
Label size	54 mm X 33 mm And as required	Frequency Band	UHF 860 - 960 MHz
Adhesive	Acrylic & 3M	RF protocol	ISO/IEC 18000-63 C
Delivery format	Reel	IC	Impinj M830/ NXP Ucode 9
No. of labels/Reel	5,00 pcs/reel	EPC memory	128-bit
Core Inner diameter	65 mm / 3 in	TID memory	96-bit / 48-bit
Available Face Material	PET	User memory	NA
Environmental Specification		Web Width	80 mm / 3 in and customizable
Operating temperature	-40 °C to 85 °C -40 °F to 185 °F	Access password	32 bit
Relative humidity	5-95% non condensing	Kill password	32 bit
UV resistant	Yes	Write cycle endurance	200000
Personalization Options		Read range	up to 7 meter
Encoding	Yes	Tamper proof	No
Customized printing	Yes	RoHs	Yes
Coloured printing	Yes	ARC Certificate	Yes