

PRODUCT DATASHEET

ADEPT-7618

PRODUCT DESCRIPTION

Adept-7618 is a high-performance UHF RFID inlay designed for global retail and supply-chain applications. It delivers reliable performance even on difficult-to-tag materials such as apparel, cardboard, plastic, and other low-detuning surfaces commonly found in dense or close-coupling environments.

With a compact antenna size of 74X14 mm, the inlay can be easily converted into a variety of end-application formats. It is available in dry inlay, wet inlay, and label/sticker formats, enabling flexible integration across different tagging requirements.

PRODUCT IMAGE



APPLICATIONS



Retails




Item level traceability



Warehouse & Inventory

TEST REPORT

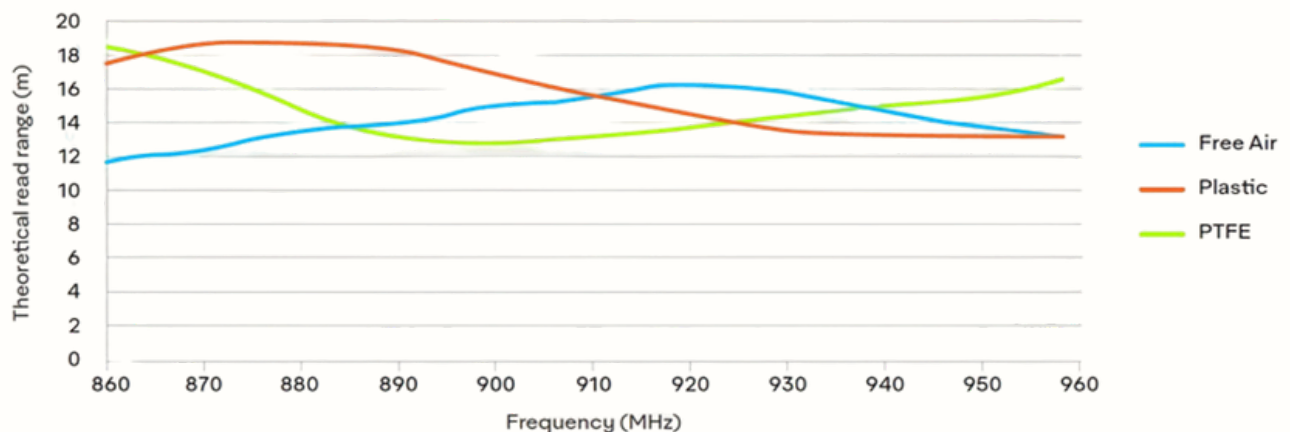

TECHNICAL DETAILS

Physical Specification		RFID Specification	
Inlay size	74 mm X 16 mm	Operating mode	Passive
Label size	76 mm X 18 mm And as required	Frequency Band	UHF 860 - 960 MHz
Adhesive	Acrylic & 3M	RF protocol	ISO/IEC 18000-63 C
Delivery format	Reel	IC	Impinj M830/ NXP Ucode 9
No. of labels/Reel	5,00 pcs/reel	EPC memory	128-bit
Core Inner diameter	80 mm / 3 in	TID memory	96-bit / 48-bit
Available Face Material	PET	User memory	NA
Environmental Specification		Web Width	80 mm / 3 in and customizable
Operating temperature	-40 °C to 85 °C -40 °F to 185 °F	Access password	32 bit
Relative humidity	5-95% non condensing	Kill password	32 bit
UV resistant	Yes	Write cycle endurance	200000
Personalization Options		Read range	up to 15 meter
Encoding	Yes	Tamper proof	No
Customized printing	Yes	RoHs	Yes
Coloured printing	Yes	ARC Certificate	Yes