

# PRODUCT DATASHEET



## ADEPT-7618C

### PRODUCT DESCRIPTION

Adept-7618C is a high-performance UHF RFID inlay designed by Aether-RFID for high-performance applications. It delivers reliable performance even on difficult-to-tag materials such as apparel, cardboard, plastic, plastic crates, and other low-detuning surfaces commonly found in dense or close-coupling environments. With a compact antenna size of 74X14 mm, the inlay can be easily converted into a variety of end-application formats. It is available in wet inlay and label/sticker formats, enabling flexible integration across different tagging requirements.

### PRODUCT IMAGE



### APPLICATIONS



Retails




Item level traceability



Warehouse & Inventory

### TEST REPORT

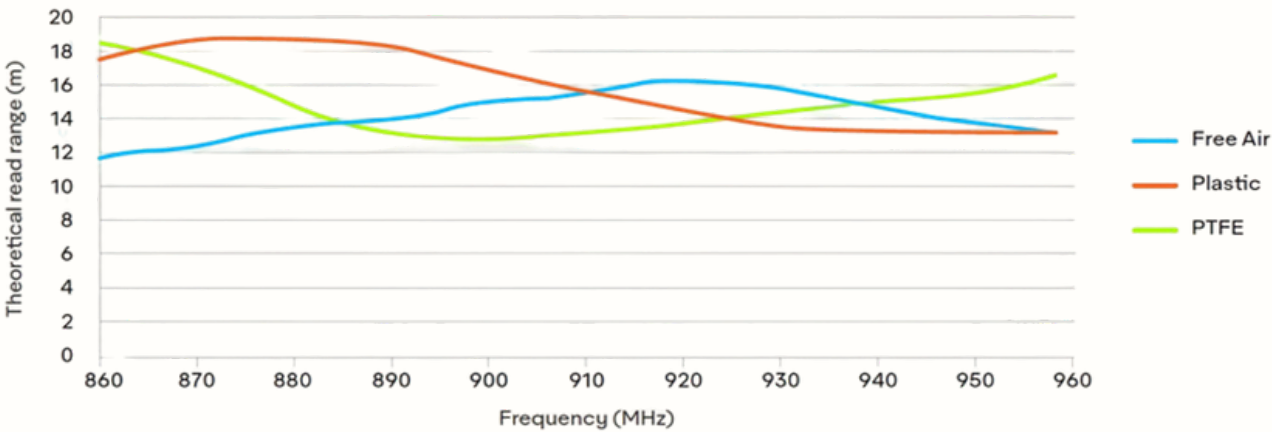

## TECHNICAL DETAILS

| Physical Specification      |                                     | RFID Specification    |                               |
|-----------------------------|-------------------------------------|-----------------------|-------------------------------|
| Inlay size                  | 74 mm X 16 mm                       | Operating mode        | Passive                       |
| Label size                  | 76 mm X 18 mm<br>And as required    | Frequency Band        | UHF 860 - 960 MHz             |
| Adhesive                    | Acrylic & 3M                        | RF protocol           | ISO/IEC 18000-63 C            |
| Delivery format             | Reel                                | IC                    | Impinj M830/ NXP Ucode 9      |
| No. of labels/Reel          | 5,00 pcs/reel                       | EPC memory            | 128-bit                       |
| Core Inner diameter         | 80 mm / 3 in                        | TID memory            | 96-bit / 48-bit               |
| Available Face Material     | PET                                 | User memory           | NA                            |
| Environmental Specification |                                     | Web Width             | 80 mm / 3 in and customizable |
| Operating temperature       | -40 °C to 85 °C<br>-40 °F to 185 °F | Access password       | 32 bit                        |
| Relative humidity           | 5-95% non condensing                | Kill password         | 32 bit                        |
| UV resistant                | Yes                                 | Write cycle endurance | 200000                        |
| Personalization Options     |                                     | Read range            | up to 15 meter                |
| Encoding                    | Yes                                 | Tamper proof          | No                            |
| Customized printing         | Yes                                 | RoHs                  | Yes                           |
| Coloured printing           | Yes                                 | ARC Certificate       | Yes                           |