

PRODUCT DATASHEET

ADEPT-9812

PRODUCT DESCRIPTION

Adept-9812 is a high-performance Gen2 UHF RFID inlay integrated with the Alien Higgs 9 chip, designed for long read-range and high-speed identification applications.

Manufactured using Aether RFID's in-house dry inlay, it ensures consistent RF performance and superior durability. The inlay is specially engineered for solar panel tracking in compliance with MNRE guidelines. This inlay can be used in different applications, also, like WMS, item-level tracking and any high-memory requirement.

PRODUCT IMAGE



APPLICATIONS



Solar




Item Level Traceability



WMS & Inventory

TEST REPORT

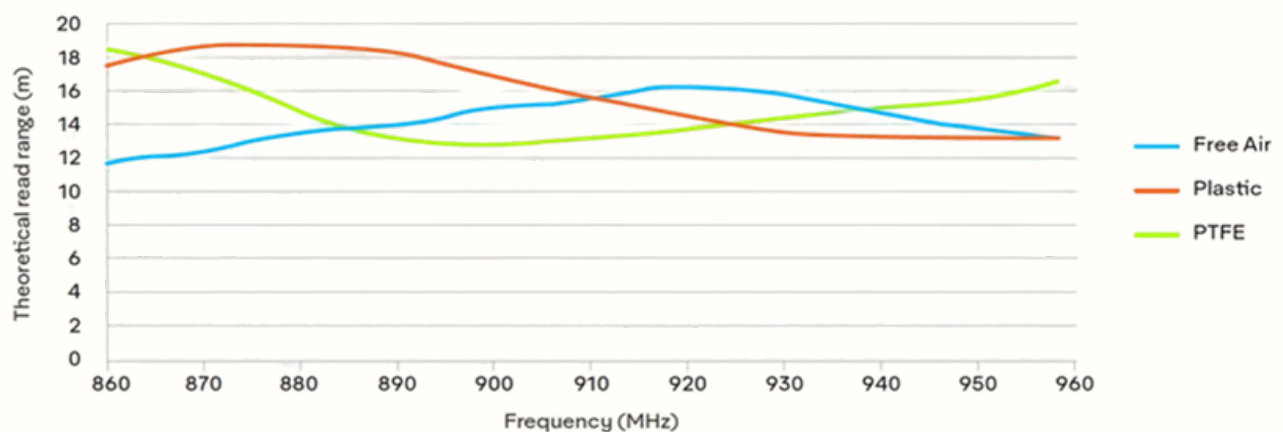

TECHNICAL DETAILS

Physical Specification		RFID Specification	
Inlay size	98 mm X 12 mm	Operating mode	Passive
Label size	98 mm X 12 mm And as required	Frequency Band	UHF 860 - 960 MHz
Adhesive	Acrylic & 3M	RF protocol	ISO/IEC 18000-63 C
Delivery format	Reel	IC	Alien Higgs 9
No. of labels/Reel	5,00 pcs/reel	EPC memory	96-bit
Core Inner diameter	110 mm / 3 in	TID memory	96-bit / 48-bit
Available Face Material	PET	User memory	688
Environmental Specification		Web Width	110 mm / 3 in and customizable
Operating temperature	-40 °C to 85 °C -40 °F to 185 °F	Access password	32 bit
Relative humidity	5-95% non condensing	Kill password	32 bit
UV resistant	Yes	Write cycle endurance	200000
Personalization Options		Read range	up to 10 metres
Encoding	Yes	Tamper proof	No
Customized printing	Yes	RoHs	Yes
Coloured printing	Yes	ARC Certificate	No