

PRODUCT DATASHEET

ADEPT-MIST-6025

PRODUCT DESCRIPTION

Mist-6025 is a mount-on-metal UHF RFID label designed with a foam isolation layer on the inner surface, enabling reliable performance when attached directly to metallic assets. Its flexible structure allows easy installation on irregular or uneven surfaces.

The tag delivers stable read performance on metal surfaces and IT equipment, and supports RFID printing and encoding, making it suitable for asset tracking, inventory management, and industrial applications

PRODUCT IMAGE



APPLICATIONS



Asset Tracking




Item-level traceability



Warehouse & Inventory

TEST REPORT

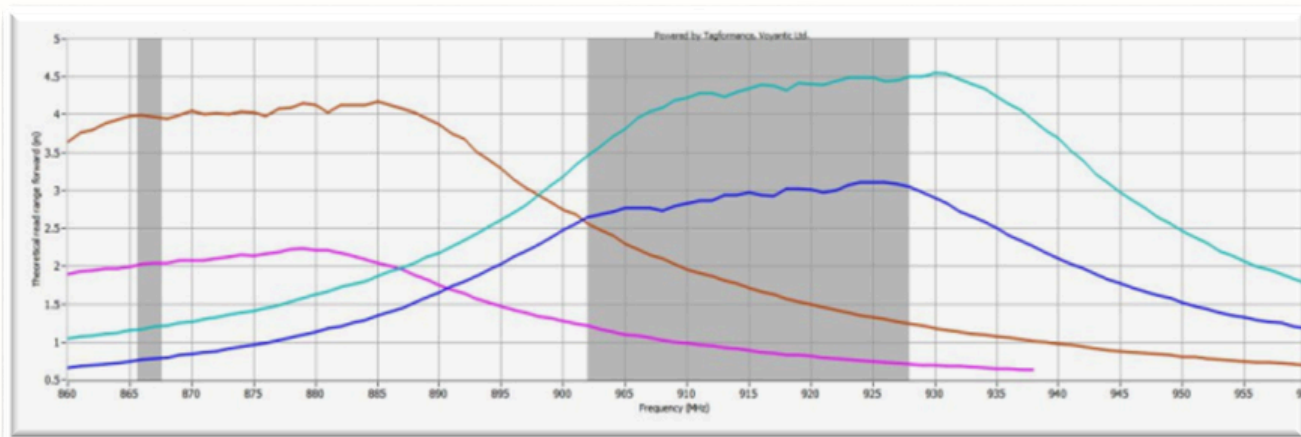

TECHNICAL DETAILS

Physical Specification		RFID Specification	
Inlay size	75 mm X 25 mm	Operating mode	Passive
Label size	60 mm X 25 mm	Frequency Band	UHF 860 - 960 MHz
Adhesive	Acrylic & 3M	RF protocol	ISO/IEC 18000-63 C
Delivery format	Reel	IC	Impinj M830/NXP Ucode 9
No. of labels/Reel	5,00 pcs/reel	EPC memory	128-bit
Core Inner diameter	65 mm / 3 in	TID memory	96-bit / 48-bit
Available Face Material	PET	User memory	NO
Environmental Specification		Web Width	55 mm / 3 in and customizable
Operating temperature	-40 °C to 85 °C -40 °F to 185 °F	Access password	32 bit
Relative humidity	5-95% non condensing	Kill password	32 bit
UV resistant	Yes	Write cycle endurance	200000
Personalization Options		Read range	up to 6-8 metres
Encoding	Yes	Tamper proof	No
Customized printing	Yes	RoHs	Yes
Coloured printing	Yes	ARC Certificate	No