

PRODUCT DATASHEET

RIDGE-F11020

PRODUCT DESCRIPTION

The RIDGE-F11020 is a thin UHF RFID off-metal tag engineered for reliable product identification on non-metal surfaces. It delivers stable and consistent read performance when mounted on materials such as wooden pallets, plastic crates, plastic totes, and other non-metal assets. Its slim yet durable construction is specifically designed for pallets. The RIDGE-F11020 provides extended read range and high performance on wooden and plastic pallets, and reusable transport items, making it an ideal solution for logistics, warehousing, and supply chain.

PRODUCT IMAGE



APPLICATIONS



Pallet Tracking





Crate Tracking



Totes tracking

TEST REPORT

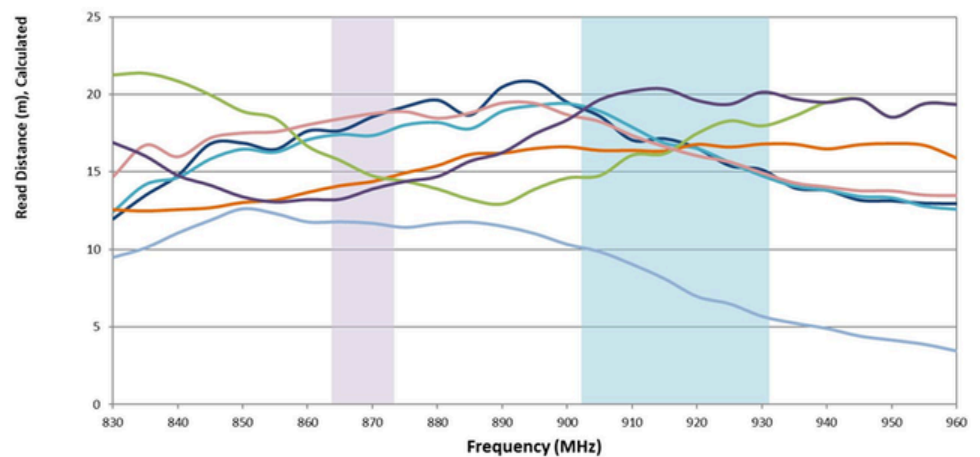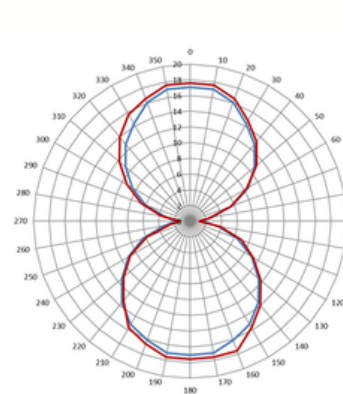

TECHNICAL DETAILS

Physical Specification		RFID Specification	
Inlay size	74 mm x 17 mm	Operating mode	Passive
Tag size	110 mm X 20 mm X 8 mm	Frequency Band	UHF 860 - 960 MHz
Adhesive	3M/ Tesa /Or Customised	RF protocol	ISO/IEC 18000-63 C
Delivery format	Pack of 100	IC	Impinj M830/NXP Ucode 9 /Higgs 9
No. of labels/Reel	NA	EPC memory	128-bit
Core Inner diameter	NA	TID memory	96-bit / 48-bit
Available Face Material	ABS/Polypropylene	User memory	NA OR 688 bit(opt)
Environmental Specification		Web Width	NA
Operating temperature	-40 °C to 85 °C -40 °F to 185 °F	Access password	32 bit
Relative humidity	5-95% non condensing	Kill password	32 bit
UV resistant	Yes	Write cycle endurance	200000
Personalization Options		Read range	up to 10 metres
Encoding	Yes	Tamper proof	Yes (Optional)
Customized printing	Yes	RoHs	Yes
Coloured printing	On Demand	ARC Certificate	No