

PRODUCT DATASHEET

RIDGE-M10025

PRODUCT DESCRIPTION

RIDGE-M10025 is a mid-size rugged, multi-purpose UHF RFID on-metal with an ABS isolation layer for reliable direct mounting on metal surfaces. Designed for heavy metal assets, tools, containers, and trolleys, it delivers a decent reading range and consistent performance for asset tracking, inventory management, and industrial automation. Especially used in secure transportation in trolley tracking and bullock cart tracking in sugar cane factories.

PRODUCT IMAGE



APPLICATIONS



Trolley & Container Tracking





Factory automation



bullock cart tracking

TEST REPORT

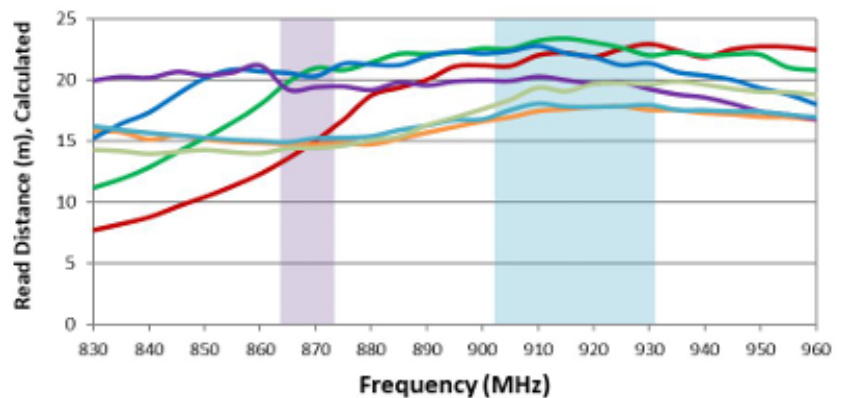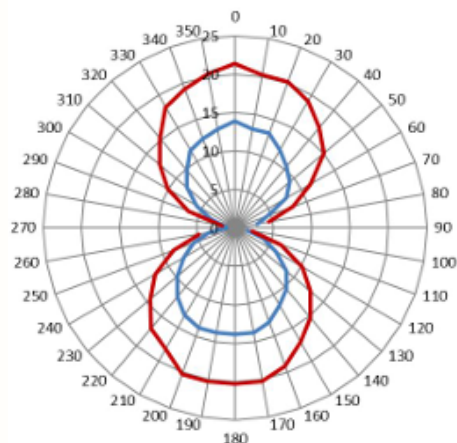

TECHNICAL DETAILS

Physical Specification		RFID Specification	
Inlay size	76x17	Operating mode	Passive
Tag size	100 mm X 50 mm X 13 mm	Frequency Band	UHF 860 - 960 MHz
Adhesive	3M/ Tesa /Or Customised	RF protocol	ISO/IEC 18000-63 C
Delivery format	Pack of 100	IC	Impinj M830/NXP Ucode 9 /Higgs 9
No. of labels/Reel	NA	EPC memory	128-bit
Core Inner diameter	NA	TID memory	96-bit / 48-bit
Available Face Material	ABS/Polypropylene	User memory	NA OR 688 bit(opt)
Environmental Specification		Web Width	NA
Operating temperature	-40 °C to 85 °C -40 °F to 185 °F	Access password	32 bit
Relative humidity	5-95% non condensing	Kill password	32 bit
UV resistant	Yes	Write cycle endurance	200000
Personalization Options		Read range	up to 10 metres
Encoding	Yes	Tamper proof	Optional
Customized printing	Yes	RoHs	Yes
Coloured printing	On Demand	ARC Certificate	No