

PRODUCT DATASHEET

RIDGE-PCB-1307

PRODUCT DESCRIPTION

RIDGE-PCB-1307 is a multi-purpose UHF RFID PCB tag designed with a plastic isolation layer on the inner surface, enabling reliable performance when attached directly to metallic assets. Its thin and compact structure allows easy installation on small and thin surfaces.

The tag delivers stable read performance on metal surfaces and IT & metal tool equipment, making it suitable for asset tracking, inventory management, and industrial tool tracking applications

PRODUCT IMAGE



APPLICATIONS



Asset Tracking




Item Level Tracking



Tool Tracking

TEST REPORT

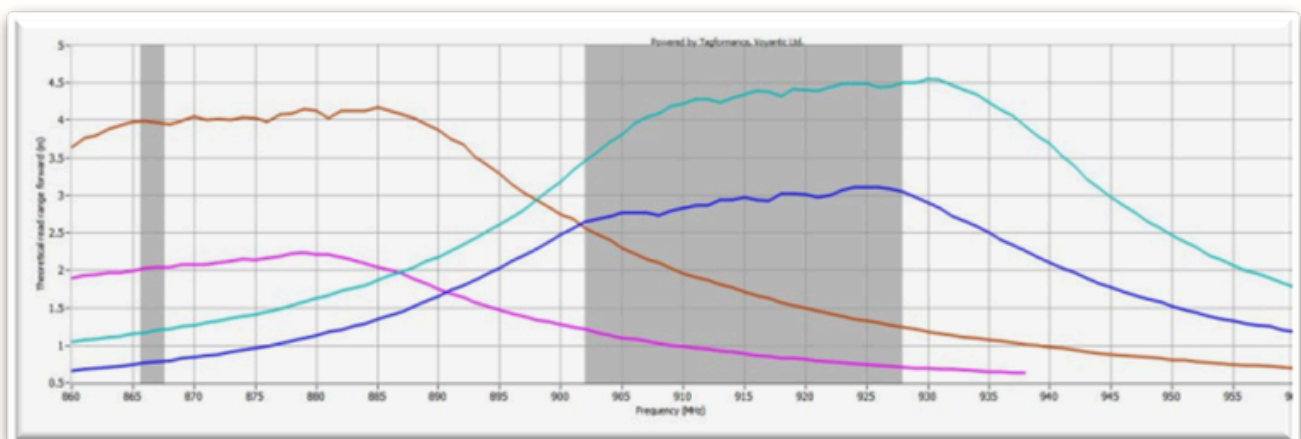

TECHNICAL DETAILS

Physical Specification		RFID Specification	
Inlay size	NA	Operating mode	Passive
Tag size	13 mm X 07 mm X 1.5 mm	Frequency Band	UHF 860 - 960 MHz
Adhesive	3M	RF protocol	ISO/IEC 18000-63 C
Delivery format	Pack of 100	IC	Impinj M830/NXP Ucode 9
No. of labels/Reel	NA	EPC memory	128-bit
Core Inner diameter	NA	TID memory	96-bit / 48-bit
Available Face Material	PCB	User memory	NA
Environmental Specification		Web Width	NA
Operating temperature	-40 °C to 85 °C -40 °F to 185 °F	Access password	32 bit
Relative humidity	5-95% non condensing	Kill password	32 bit
UV resistant	Yes	Write cycle endurance	200000
Personalization Options		Read range	up to 1.5 metres
Encoding	Yes	Tamper proof	No
Customized printing	No	RoHs	Yes
Coloured printing	No	ARC Certificate	No