

PRODUCT DATASHEET

RIDGE-M15025-T

PRODUCT DESCRIPTION

RIDGE-M15025-T is a rugged, multi-purpose UHF RFID on-metal tamper-proof tag featuring an ABS isolation layer for reliable direct mounting on metal surfaces. It becomes non-functional when removed, providing tamper evidence. Designed for heavy metal assets, tools, containers, and trolleys, it delivers a long read range and consistent performance for asset tracking, inventory management, and industrial automation. Especially used in secure transportation in trolley tracking and bullock cart tracking in sugar cane factory

PRODUCT IMAGE



APPLICATIONS



Trolley & Container Tracking





Factory automation



bullock cart tracking

TEST REPORT

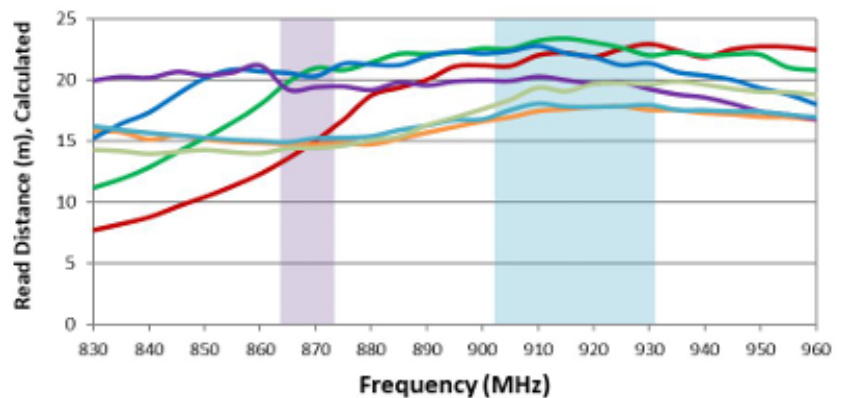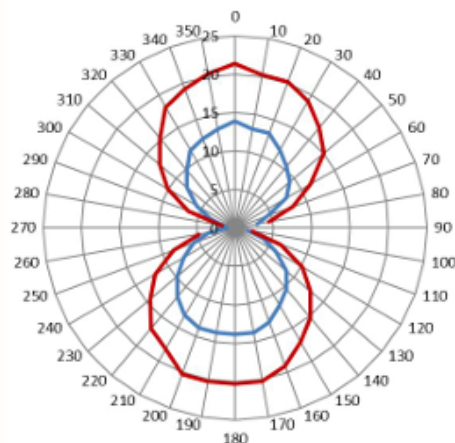

TECHNICAL DETAILS

Physical Specification		RFID Specification	
Inlay size	76x17	Operating mode	Passive
Tag size	150 mm X 50 mm X 17 mm	Frequency Band	UHF 860 - 960 MHz
Adhesive	3M Or Customised	RF protocol	ISO/IEC 18000-63 C
Delivery format	Pack of 100	IC	Impinj M830/NXP Ucode 9 /Higgs 9
No. of labels/Reel	NA	EPC memory	128-bit
Core Inner diameter	NA	TID memory	96-bit / 48-bit
Available Face Material	ABS/Polypropylene	User memory	NA OR 688 bit
Environmental Specification		Web Width	NA
Operating temperature	-40 °C to 85 °C -40 °F to 185 °F	Access password	32 bit
Relative humidity	5-95% non condensing	Kill password	32 bit
UV resistant	Yes	Write cycle endurance	200000
Personalization Options		Read range	up to 12 metres
Encoding	Yes	Tamper proof	Yes
Customized printing	Yes	RoHs	Yes
Coloured printing	On Demand	ARC Certificate	No