

PRODUCT DATASHEET

RIDGE-M15025

PRODUCT DESCRIPTION

RIDGE-M15025 is a large, rugged UHF on-metal tag designed for reliable performance on metallic surfaces. Featuring an integrated ABS isolation layer, it can be mounted directly on metal without compromising read range. The tag delivers a long read range and consistent performance, making it ideal for tracking heavy metal assets, tools, containers, trolleys, and other industrial equipment in asset management, inventory control, and automation applications. It supports easy installation using high-strength adhesive or rivets, ensuring secure attachment in industrial environments.

PRODUCT IMAGE



APPLICATIONS



Trolley & Container Tracking





Factory automation



Warehouse & Inventory

TEST REPORT

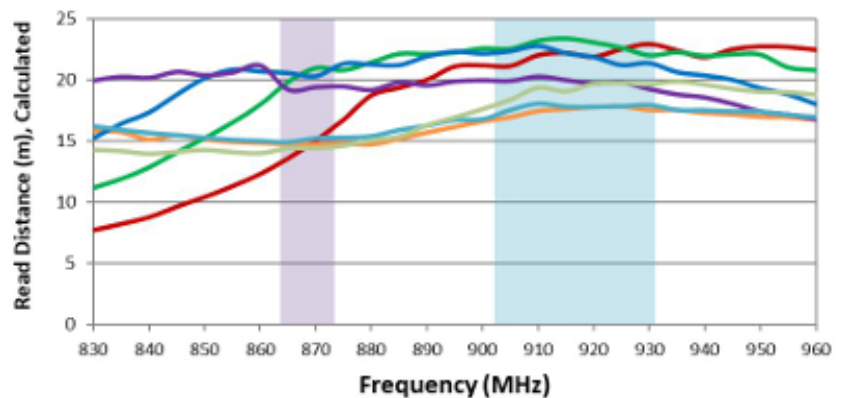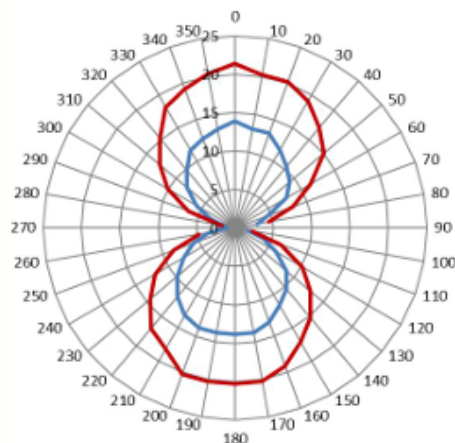

TECHNICAL DETAILS

Physical Specification		RFID Specification	
Inlay size	76x17	Operating mode	Passive
Tag size	150 mm X 50 mm X 17 mm	Frequency Band	UHF 860 - 960 MHz
Adhesive	3M Or Customised	RF protocol	ISO/IEC 18000-63 C
Delivery format	Pack of 100	IC	Impinj M830/NXP Ucode 9 /Higgs 9
No. of labels/Reel	NA	EPC memory	128-bit
Core Inner diameter	NA	TID memory	96-bit / 48-bit
Available Face Material	ABS/Polypropylene	User memory	NA OR 688 bit
Environmental Specification		Web Width	NA
Operating temperature	-40 °C to 85 °C -40 °F to 185 °F	Access password	32 bit
Relative humidity	5-95% non condensing	Kill password	32 bit
UV resistant	Yes	Write cycle endurance	200000
Personalization Options		Read range	up to 12 metres
Encoding	Yes	Tamper proof	No
Customized printing	Yes	RoHs	Yes
Coloured printing	On Demand	ARC Certificate	No