

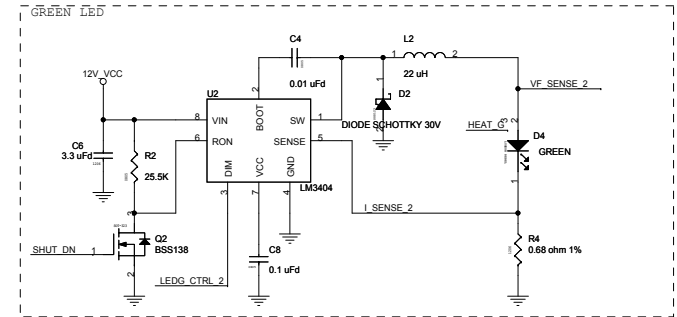
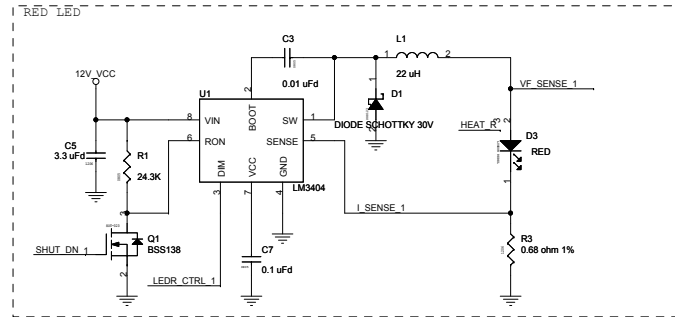



LED Daughter Card

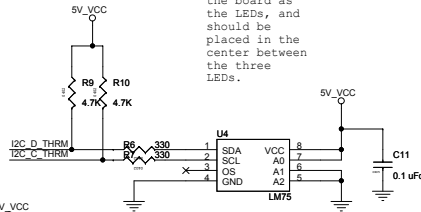


Header (right angle) for connecting daughter card to the main board.



Thermistor should be placed on the same side of the board as the LEDs, and should be placed in the center between the three LEDs.

I2C slave address hard coded to 0x49 hex. The MSB of the address is set internally by the LM75. The LSB is set by A2-A0.

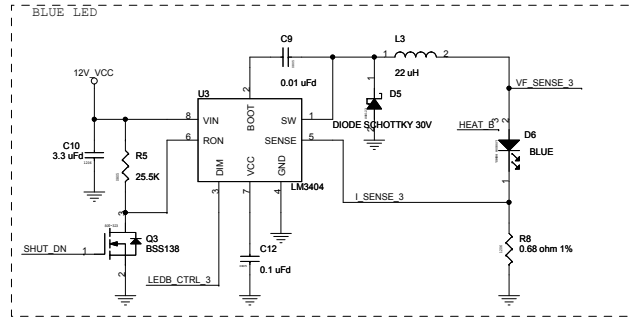

REBEL PDCR-9418 Rev **
DAUGHTER 121R-41800 Rev **
CARD

CYPRESS SEMICONDUCTOR © 2007		
Title	CY3263-ColorLock Rebel Daughter Card	
Size	Document Number	Rev
C	REF-14350	B
Date:	Friday, February 08, 2008	Sheet 1 of 3