


 **DRAFT — NOT APPROVED FOR PRODUCTION.** 0 decisions require buyer confirmation.

TECHNICAL SPECIFICATION / REV 00

Men's Classic Pullover Hoodie

Apparel - Tops / Sweatshirts · Streetwear lifestyle apparel / casual wear

DRAFT — NOT APPROVED FOR PRODUCTION

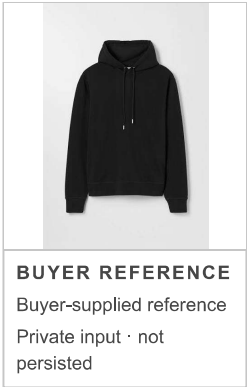

01 Product Overview

Classic minimalist black cotton pullover hoodie featuring a double-layer self-fabric hood, round tubular drawcords with metal aglets, set-in sleeves, 1x1 rib knit cuffs and bottom waistband, and a clean pocketless front body.

PRODUCT CATEGORY	BUYER CONTEXT	REVERSIBLE
Apparel - Tops / Sweatshirts	Small streetwear brand · First production run	No

02 Bill of Materials

COMPONENT	PLACEMENT	MATERIAL / SPECIFICATION	COLOUR	REVIEW STATUS
Main Body & Hood Fabric	Front body, back body, sleeves, outer and inner hood	100% Cotton French Terry or Fleece · Heavyweight cotton knit · 100% Cotton ~380 GSM	Black	BUYER CONFIRMED
Rib Knit	Sleeve cuffs, bottom hem waistband	1x1 Cotton/Elastane Rib Knit · 1x1 rib knit with elastane for recovery · 95% Cotton, 5% Elastane ~380 GSM	Black (match main body)	BUYER CONFIRMED
Hood Drawcord	Hood edge channel	Braided Cotton Cord · 6mm diameter round tubular drawcord · 100% Cotton	Black	BUYER CONFIRMED
Drawcord Aglets	Drawcord ends	Metal / Alloy · 20mm length cylindrical metal aglet · Zinc Alloy	Brushed Silver / Matte Nickel	BUYER CONFIRMED
Hood Eyelets	Hood opening base	Embroidered Eyelet / Metal Grommet · 8mm internal diameter · 100% Polyester Thread or Brass	Black / Tonal	BUYER CONFIRMED
Sewing Thread	All seams and hems	Spun Polyester / Core-spun Polyester · Core spun high-tenacity thread · 100% Polyester	Black (Dye to match fabric)	REVIEW REQUIRED

A dash or “Not specified” is an intentional unknown, not a manufacturing default.

03 Measurement Specification (cm)

Proposed numerical measurements remain unresolved until buyer confirmation.

POINT OF MEASURE	HOW TO MEASURE	S	M	L	TOLERANCE
Chest Width (1" below armhole)	Measure straight across garment 2.5cm below armhole seam from edge to edge.	56	59	62	±1
Body Length (HPS to Bottom Hem)	Measure from high point of shoulder straight down to bottom edge of hem band.	69	71	73	±1
Shoulder Width (Across Shoulder)	Measure straight across shoulder point to shoulder point.	50	52	54	±0.8
Sleeve Length (from Shoulder Seam)	Measure from shoulder seam along outer edge of sleeve to cuff hem edge.	64	65.5	67	±1
Bottom Hem Opening Width (Relaxed)	Measure straight across bottom edge of rib waistband in relaxed state.	46	49	52	±1
Sleeve Cuff Opening Width (Relaxed)	Measure flat across cuff opening edge in relaxed state.	9.5	10	10.5	±0.5
Hood Height	Measure from neckline seam to top peak of hood.	37	38	39	±0.8

04 Construction / Sewing Notes

01 MAIN BODY / SIDE SEAMS

Assemble main body using 4-thread overlock safety stitch (approx. 10-12 SPI) with 7mm seam allowance.

Additional note: Ensure clean finish on all internal fleece/terry edges.

02 HOOD

Construct double-layer self-fabric hood. Stitch center seam, turn right-side out, and topstitch drawstring tunnel (2.5cm width).

Additional note: Form reinforced eyelet holes at hood base before closing tunnel.

03 HOOD / DRAWCORD

Insert round drawcord through hood tunnel and secure silver metal aglets at both cord ends.

Additional note: Ensure aglets are securely clamped/crimped.

04 NECKLINE

Attach hood to neckline with overlock stitch; cover back neck seam with self-fabric or herringbone binding tape for clean finish.

Additional note: Tear-away or main woven label inserted centered at inner back neck.

05 SLEEVES / ARMHOLES

Set in sleeves to armholes with 4-thread overlock and join underarm/side seams in one continuous line.

Additional note: Align cross seams accurately at underarm intersection.

06 CUFFS & HEM

Attach folded 1x1 rib knit cuffs and bottom waistband to sleeve openings and body hem with 4-thread overlock, evenly distributing stretch.

Additional note: Apply flatlock or twin-needle coverstitch topstitching along seam line.

05 Color Configuration



COLORWAY

Black

MAIN BODY: BLACK