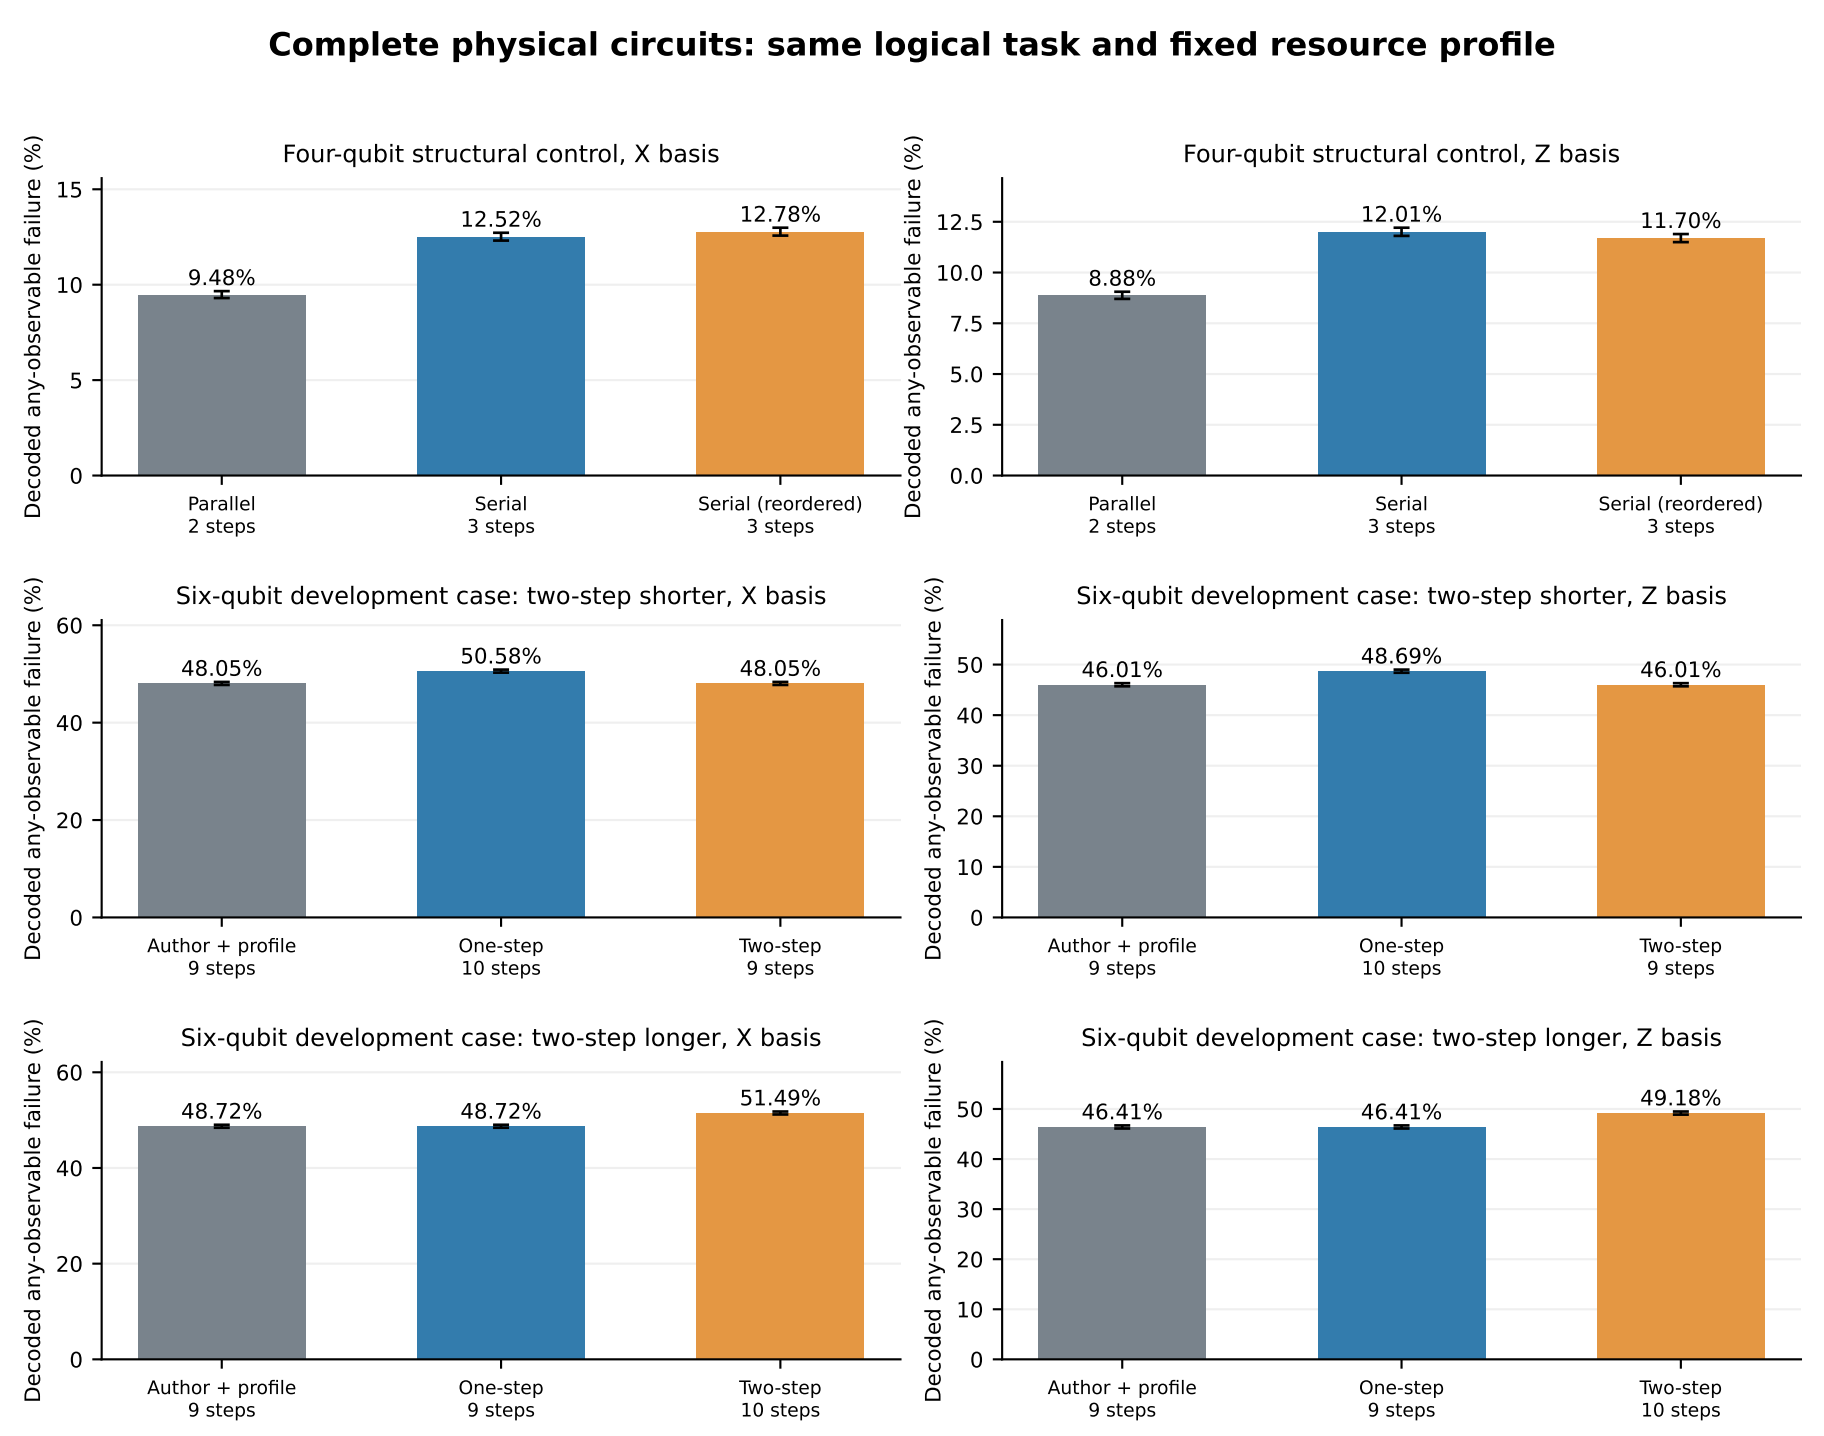
Complete physical circuits: same logical task and fixed resource profile
Four-qubit structural control, X basis
Four-qubit structural control, Z basis
Six-qubit development case: two-step shorter, X basis
Six-qubit development case: two-step shorter, Z basis
Six-qubit development case: two-step longer, X basis
Six-qubit development case: two-step longer, Z basis
Decoded any-observable failure (%)
9.48%
12.52%
12.78%
8.88%
12.01%
11.70%
48.05%
50.58%
48.05%
46.01%
48.69%
46.01%
48.72%
48.72%
51.49%
46.41%
46.41%
49.18%
Parallel
2 steps
Serial
3 steps
Serial (reordered)
3 steps
Author + profile
9 steps
One-step
10 steps
Two-step
9 steps
One-step
9 steps
Two-step
10 steps
d=3, p=0.001, pinned TQEC uniform-depolarizing circuit noise, ordinary MWPM.
100,000 shots per unique circuit; 95% Wilson intervals. Selected development cases, not held-out performance.