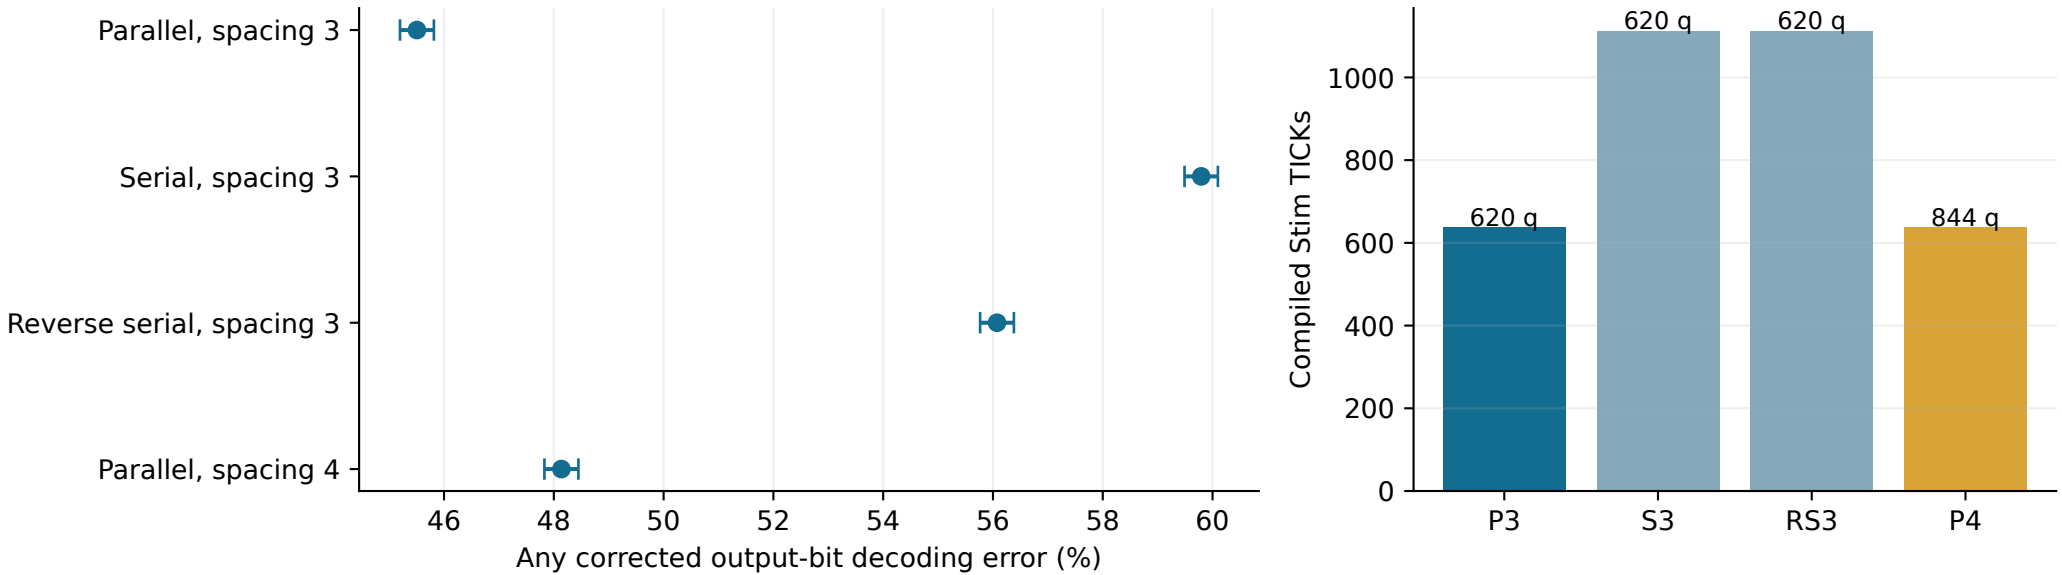
Complete QASMBench hs4_n4: retained H/X/CX/readout
Parallel, spacing 3
Serial, spacing 3
Reverse serial, spacing 3
Parallel, spacing 4
46
48
50
52
54
56
58
60
Any corrected output-bit decoding error (%)
Compiled Stim TICKs
0
200
400
600
800
1000
620 q
620 q
620 q
844 q
P3
S3
RS3
P4
d=3, p=0.001; TQEC uniform depolarizing; ordinary MWPM; 100,000 shots/condition; Wilson 95% CI
X uses a declared zero-time Pauli frame. Structural controls; no held-out scheduler claim.