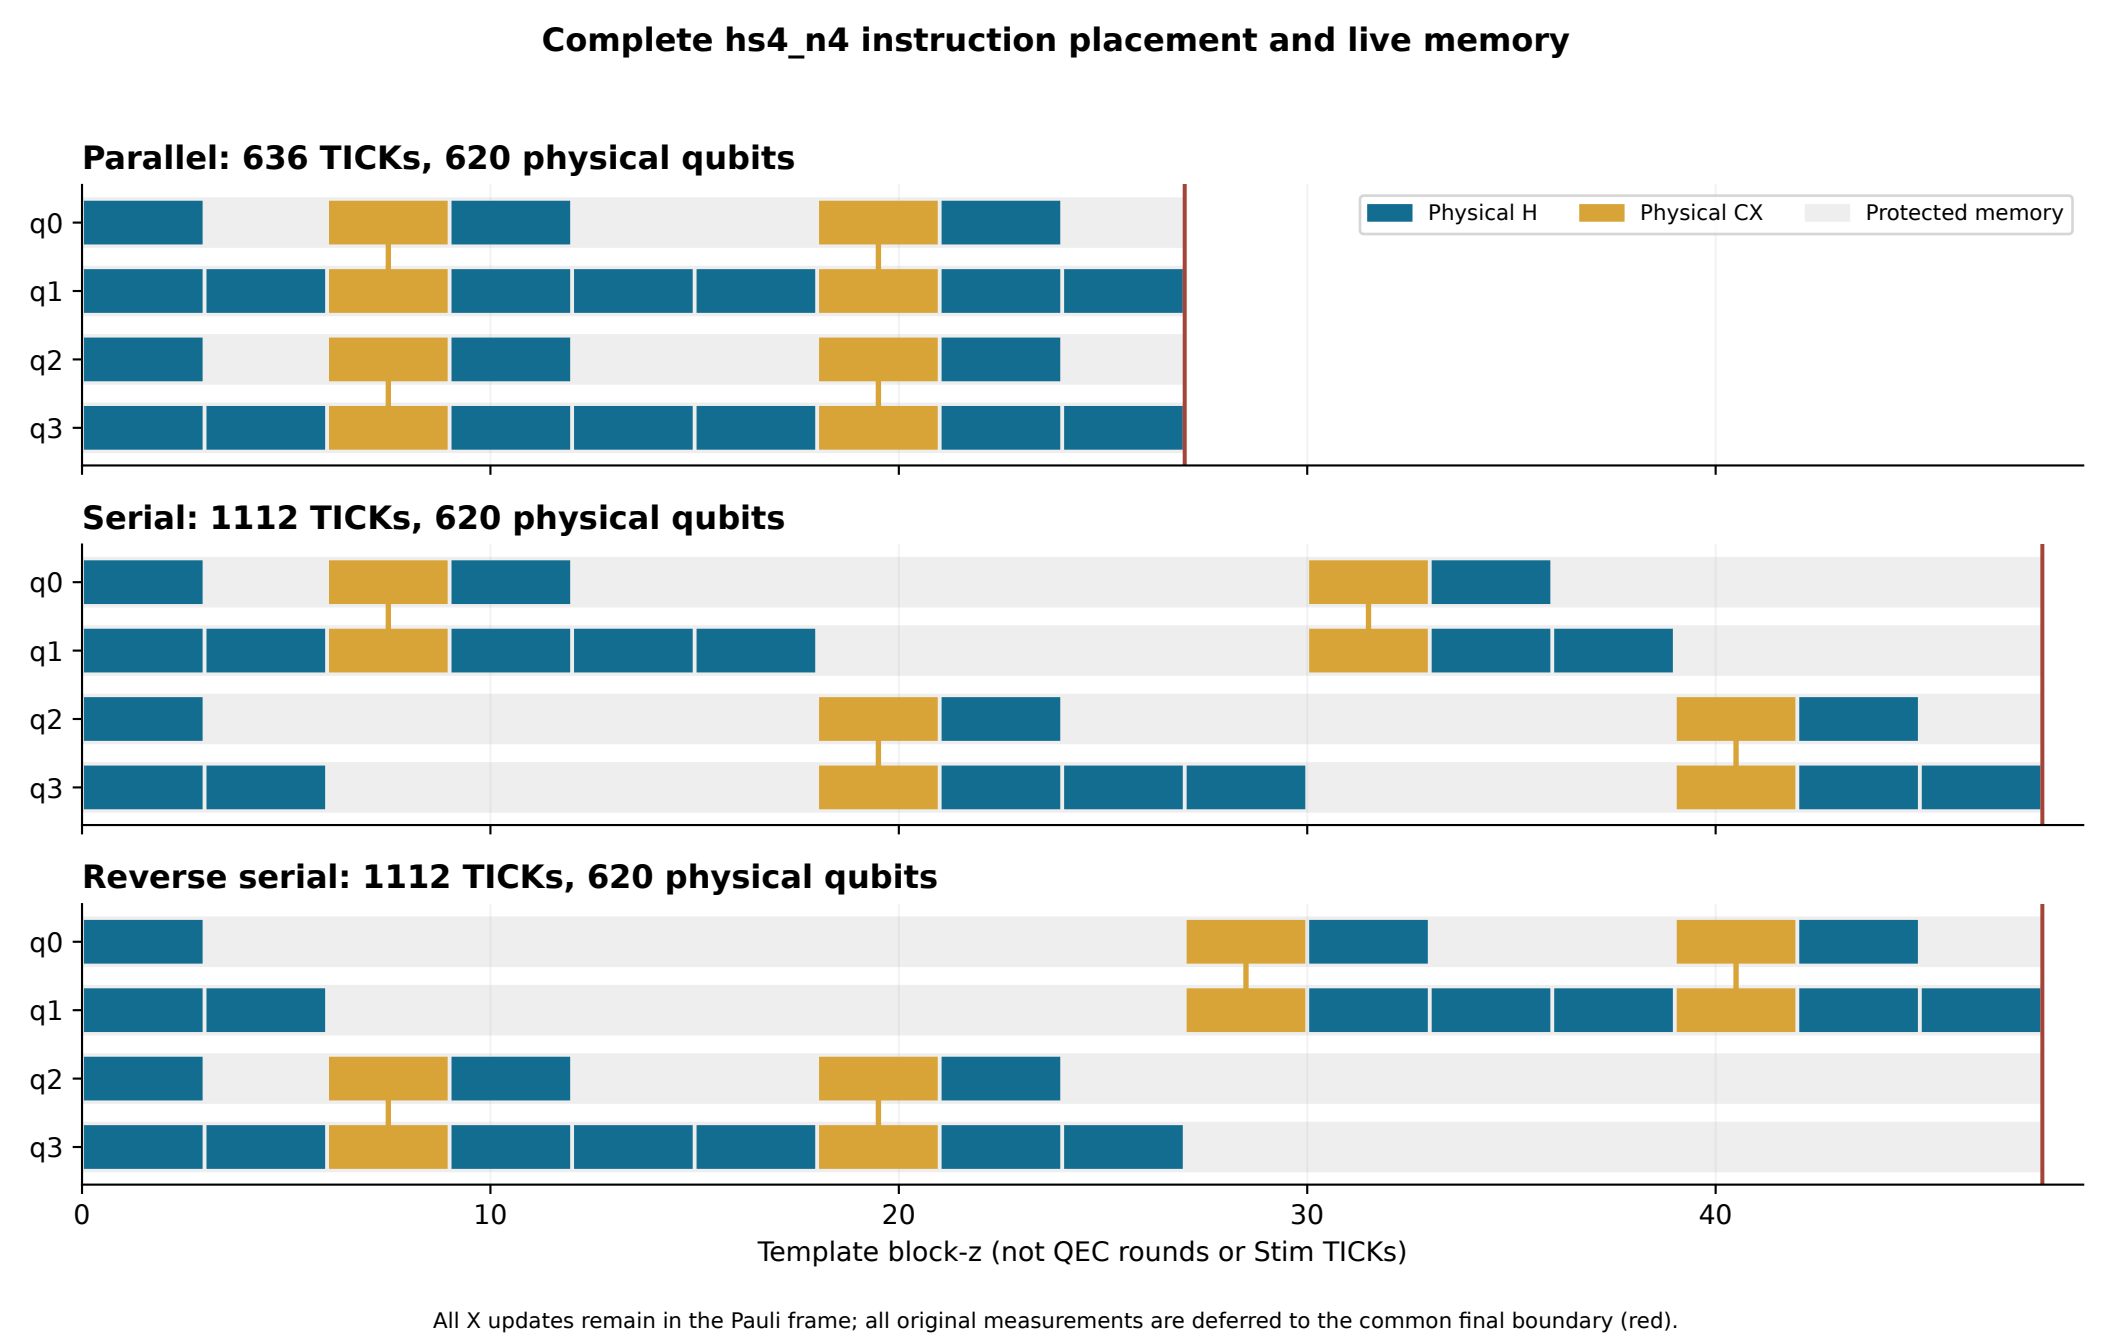
Complete hs4_n4 instruction placement and live memory
Parallel: 636 TICKs, 620 physical qubits
Serial: 1112 TICKs, 620 physical qubits
Reverse serial: 1112 TICKs, 620 physical qubits
Physical H
Physical CX
Protected memory
q0
q1
q2
q3
0
10
20
30
40
Template block-z (not QEC rounds or Stim TICKs)
All X updates remain in the Pauli frame; all original measurements are deferred to the common final boundary (red).