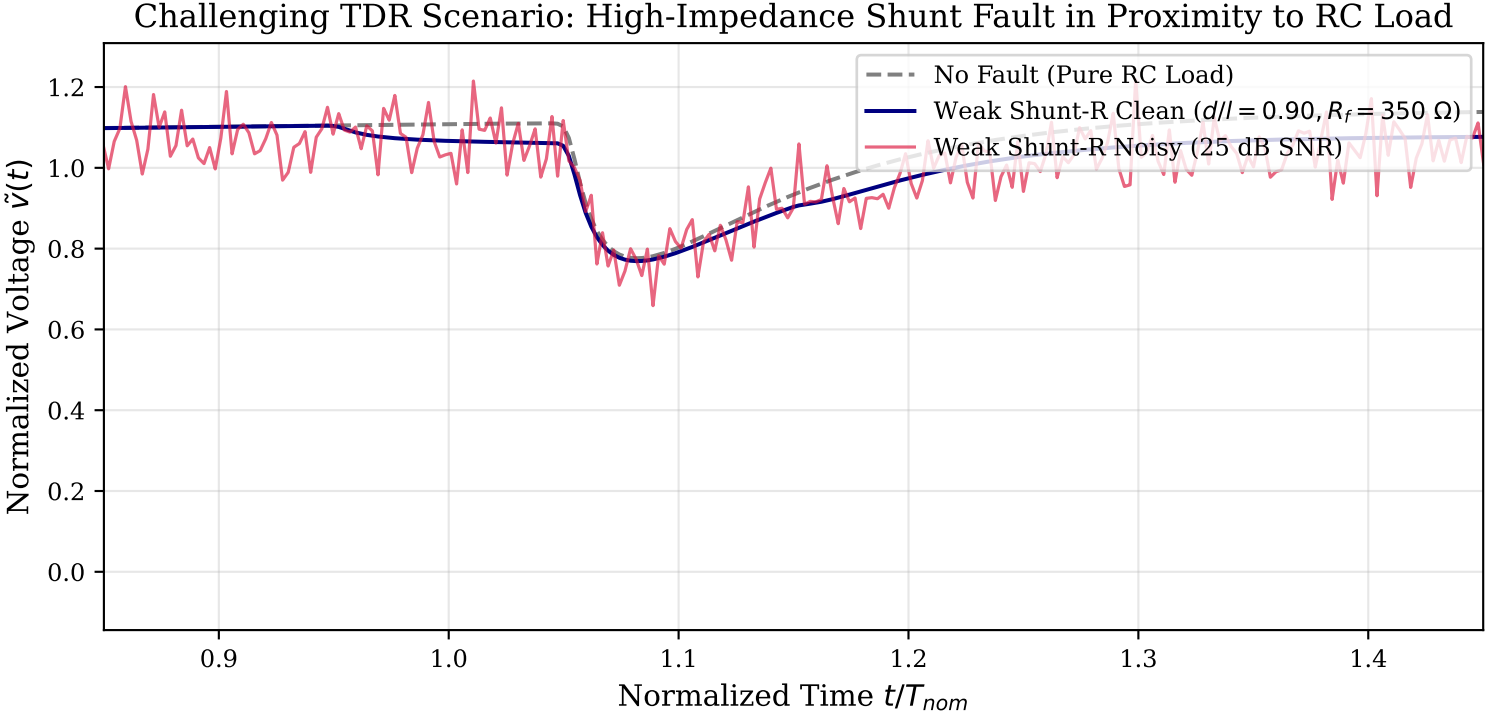
Challenging TDR Scenario: High-Impedance Shunt Fault in Proximity to RC Load
No Fault (Pure RC Load)
Weak Shunt-R Clean ($d/l = 0.90, R_f = 350\ \Omega$)
Weak Shunt-R Noisy (25 dB SNR)
Normalized Voltage $\tilde{v}(t)$
Normalized Time t/T_{nom}
0.0
0.2
0.4
0.6
0.8
1.0
1.2
0.9
1.0
1.1
1.2
1.3
1.4