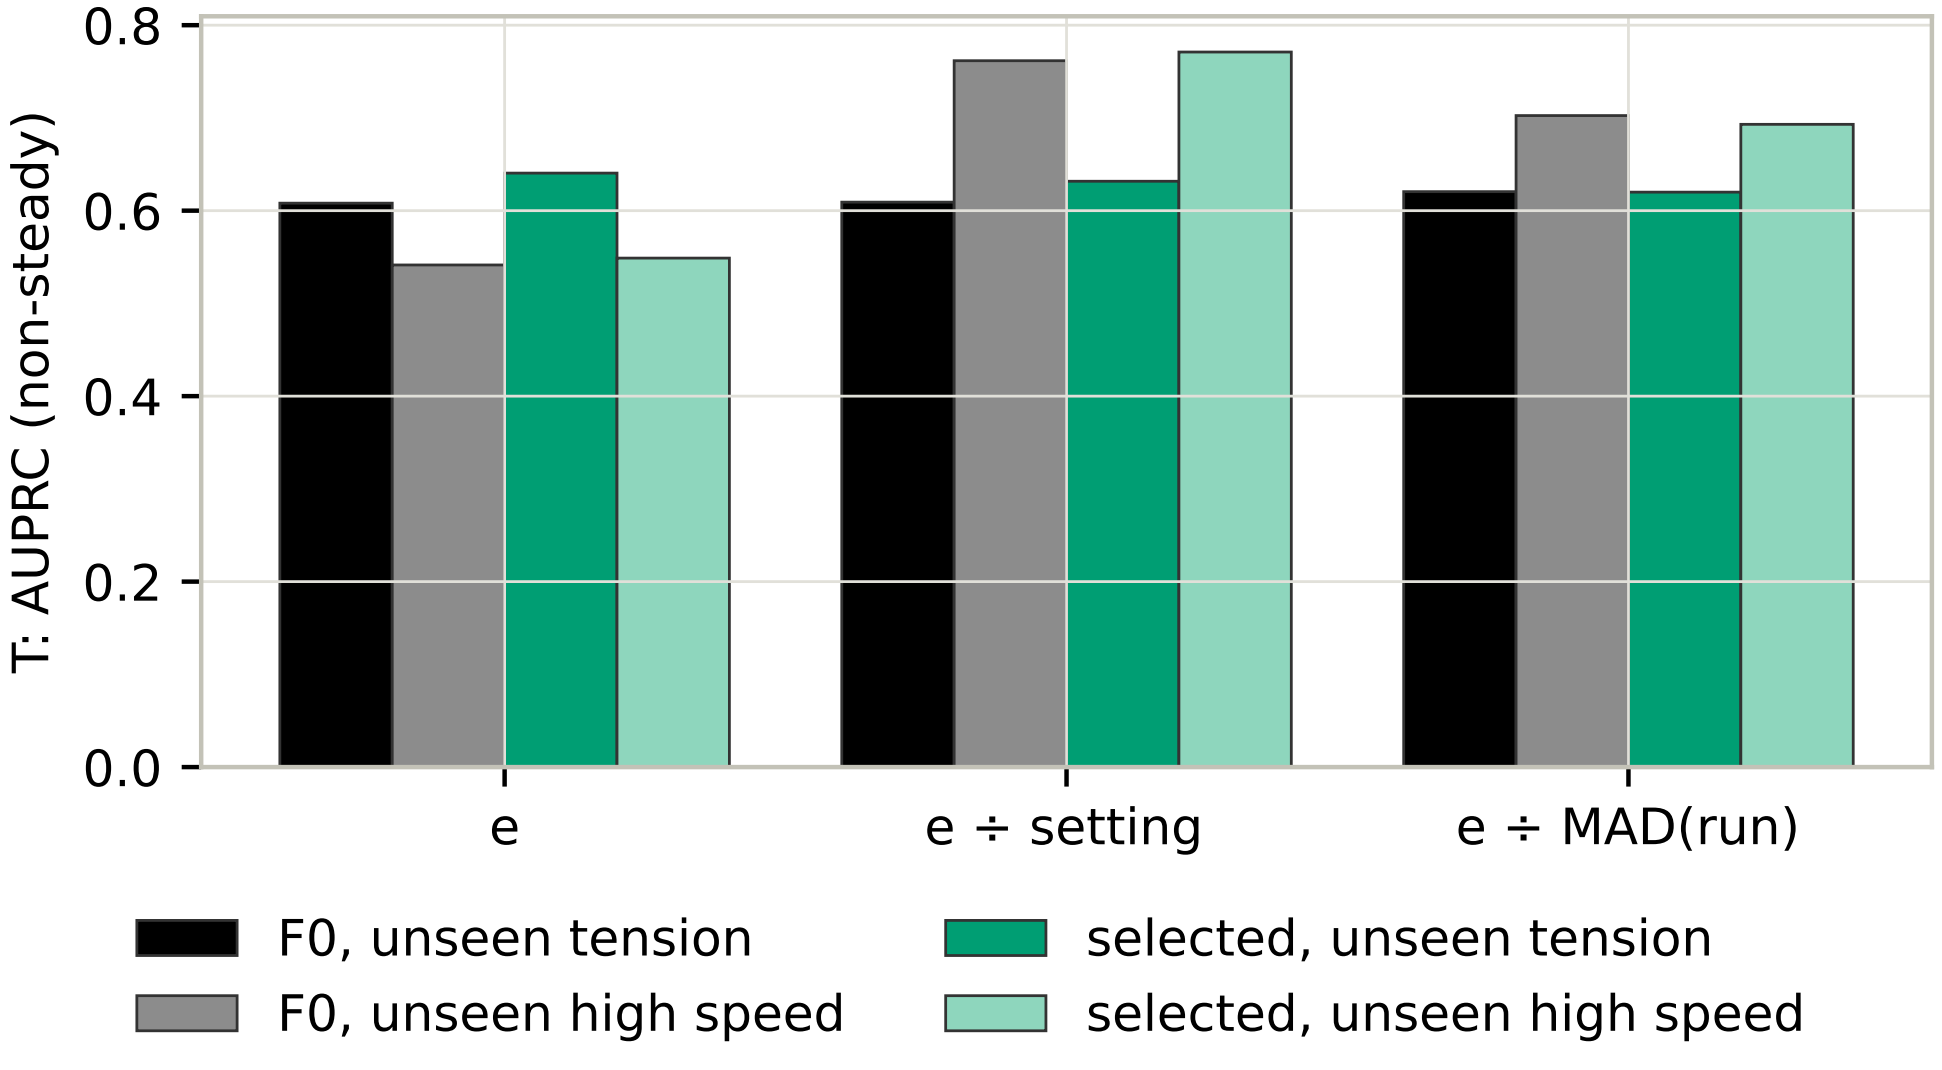
0.8
0.6
0.4
0.2
0.0
T: AUPRC (non-steady)
e
e ÷ setting
e ÷ MAD(run)
F0, unseen tension
F0, unseen high speed
selected, unseen tension
selected, unseen high speed