AERODROME CHART | N39 12.3 E125 40.2 | Apt Elev **89FT**

PYONGYANG/Pyongyang Intl.

TWR	118.300
APP/DEP	133.900

IN VATSIM

GND	**121.800**
TWR	**118.300**
APP	**133.900**
DEP	**130.000**

Birds in vicinity of airport.
Rwy guard lights available on TWY E

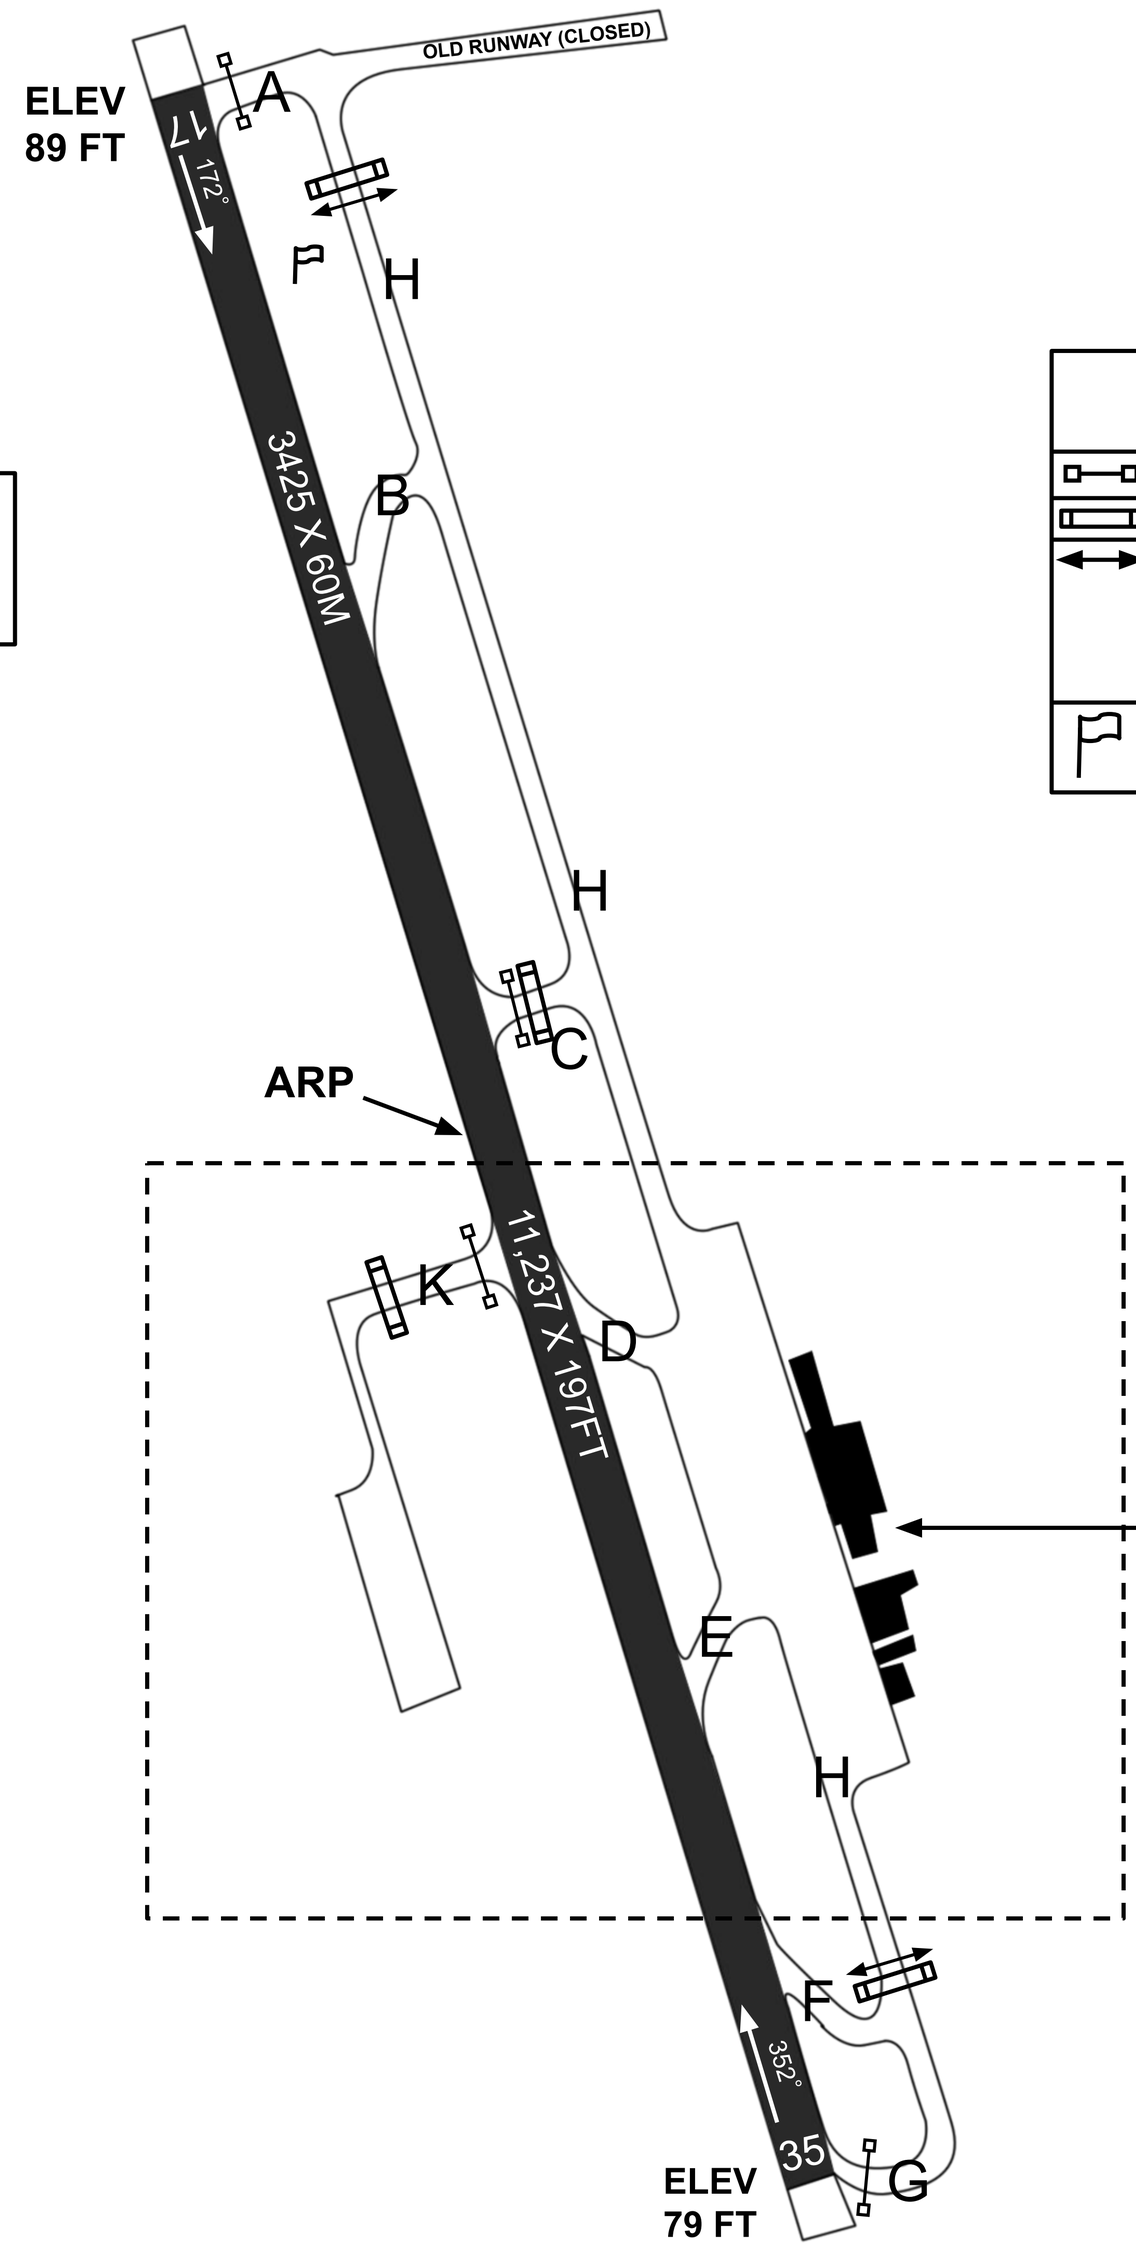

FOR DETAILS SEE ACFT PARKING/ DOCKING CHART

Control Tower AIS + MET

LEGEND

	Hold Line
	CAT II/III Hold Line
	GP critical and sensitive area, ACFT forbidden to enter without ATC clearance.
	Cone

ADDITIONAL RUNWAY INFORMATION

17	**HIRL (60m)**	**HIALS**	**SFL PAPI-L(3.0°)(1)**	HST–D&F
35	**HIRL (60m)**	**HIALS**	**PAPI-L(3.0°)(1)**	HST–B

(1) CL (30m SPACING)

NOISE ABATEMENT PROCEDURES

NADP 1 or NADP 2 procedures has to be used for take off.
Rwy 17 is used for preferential Rwy for noise abatement for take-off and Rwy 35 for landing.
RUN-UP TESTS: Ground running of acft engines for test or maintenance is subject to ATC approval.

(2) LVP MUST BE IN FORCE — **TAKE-OFF**

	RL & CL(2)	RCLM (DAY ONLY) or RL(2)	RCLM (DAY ONLY) or RL
A B C	200M	250M	400M
D	250M	300M	