GY-51 3-Axis Digital Compass Module

SENSOR: LSM303DLH

FEATURES (LSM303DLH)

- Analog supply voltage: 2.5 V to 3.3 V
- Digital supply voltage IOs: 1.8 V
- Power-down mode
- 3 magnetic field channels and 3 acceleration channels
- ±1.3 to ±8,1 gauss magnetic field full-scale
- ±2 g/±4 g/±8 g dynamically selectable full-scale
- 16-bit data out
- I2C serial interface
- 2 independent programmable interrupt generators for free-fall and motion detection
- Embedded self-test
- Accelerometer sleep-to-wakeup function
- 6D orientation detection
- ECOPACK® RoHS and "Green" compliant

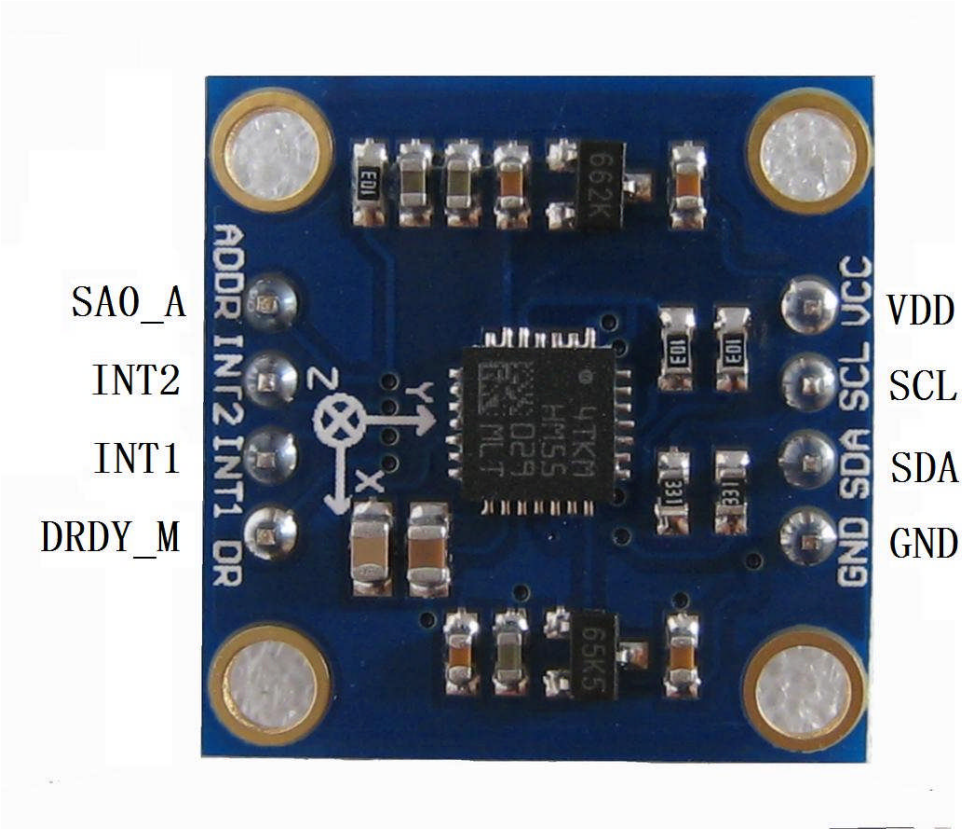

Pin Function Descriptions

Pin	Pinname	Desscription
1	SAO_A	Acceleration I2C device address
2	INT2	Inertial interrupt 2
3	INT1	Inertial interrupt 1
4	DRDY_M	Magnetic signal interface data ready - test point
5	GND	Supply Ground
6	SDA	Serial Data - I2C Master/Slave Data
7	SCL	Serial Clock - I2C Master/Slave Clock
8	VCC	Supply Voltage. 2.7-5v

Table:
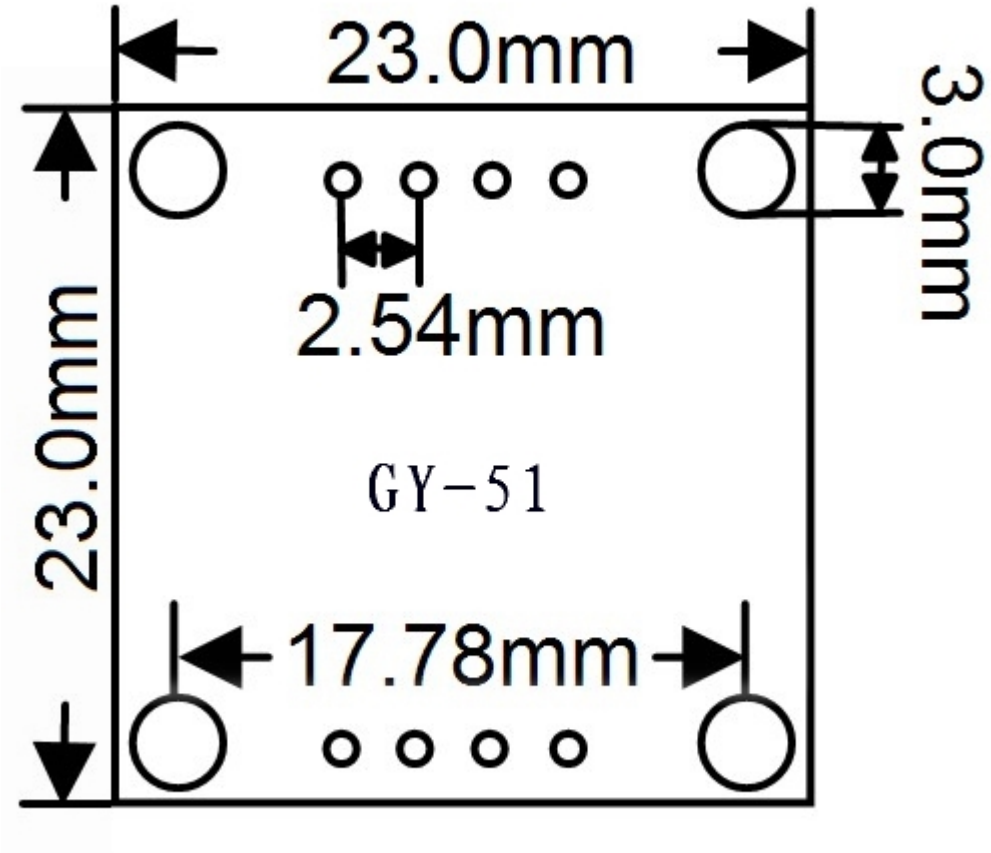
name	Desscription
Operating Voltage Range	2.7~5 V
Supply Current	0.83MA
interfaces	IIC
Operating Temperatu	-40° ~ 85°
dimension (长*宽*高)	23mm×23mm×11.6mm