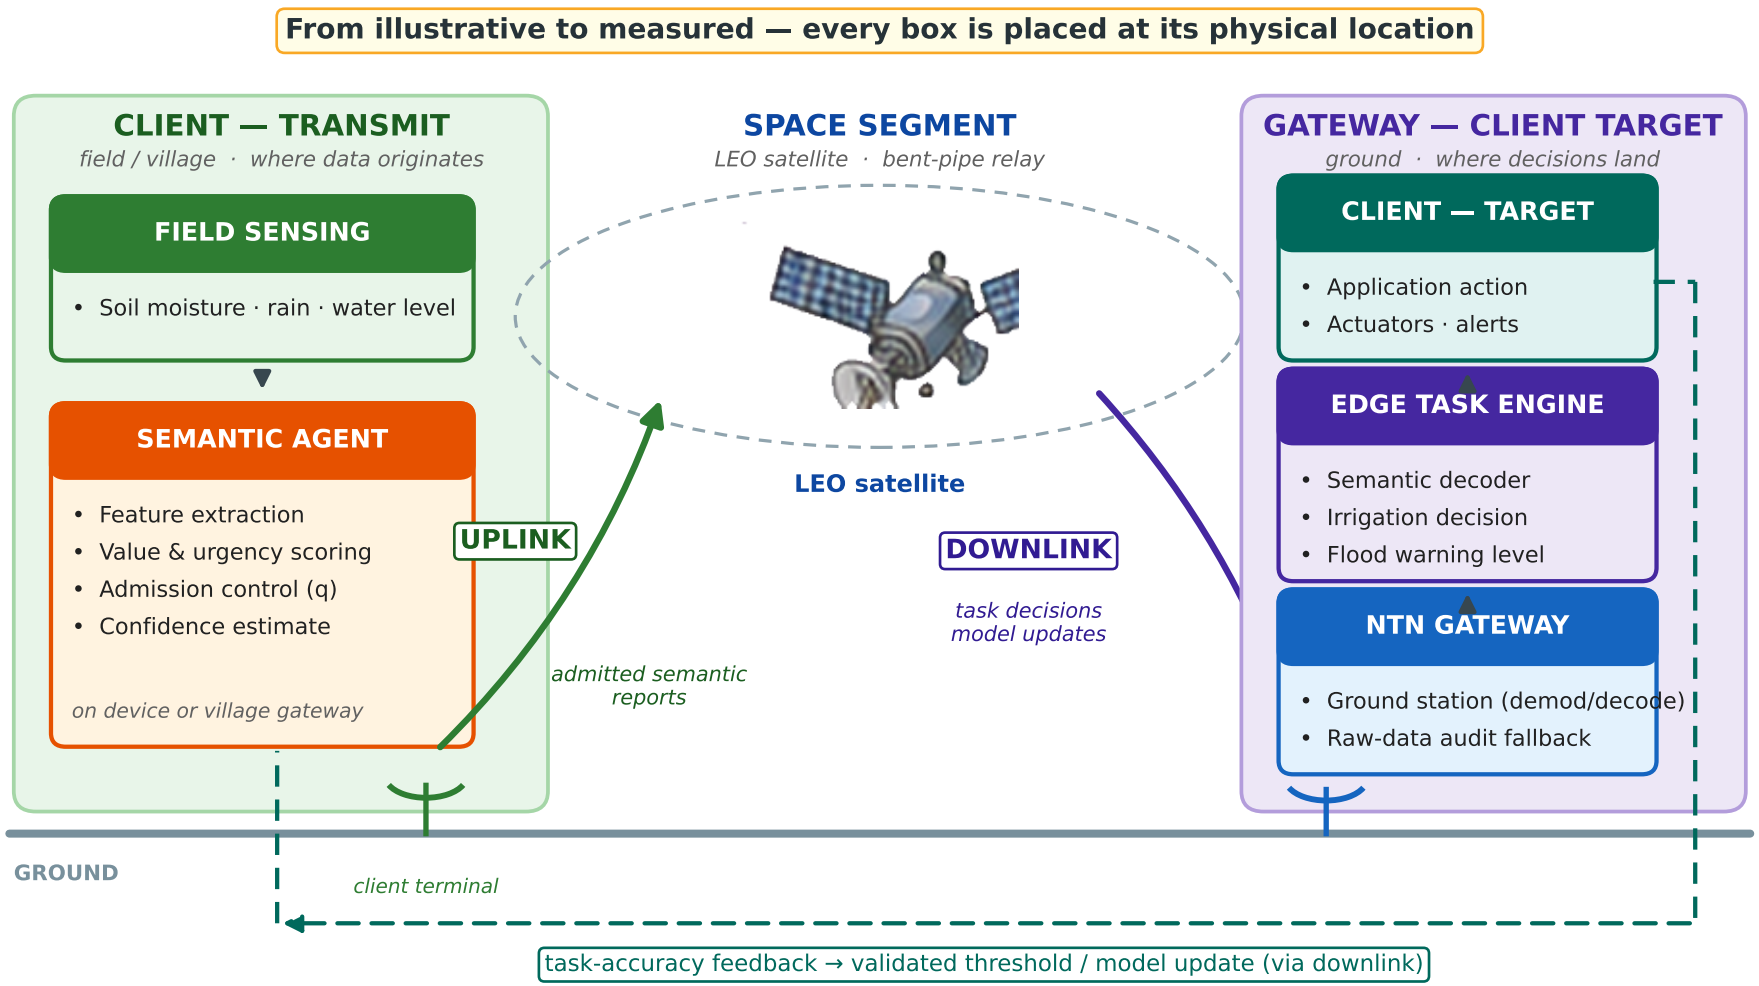


Figure 1.
System architecture by physical location: the client-transmit side (field/village) sends admitted semantic reports over the NTN uplink; the LEO satellite relays task decisions over the downlink to the ground gateway; the edge task engine drives the client-target application, with task-accuracy feedback returning via downlink.