



SR4-54HTB 400-420M

MAXIMUM EFFICIENCY %

21.50

POSITIVE POWER TOLERANCE WP

0~+5.00



CELLS

M10 108

MODULE TECHNOLOGY

TOPCon & MICRO
GAP DESIGN

WITH IMPROVED SHADE TOLERANCE

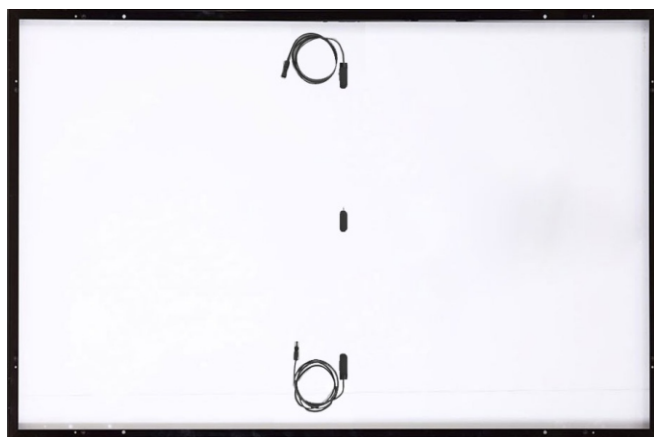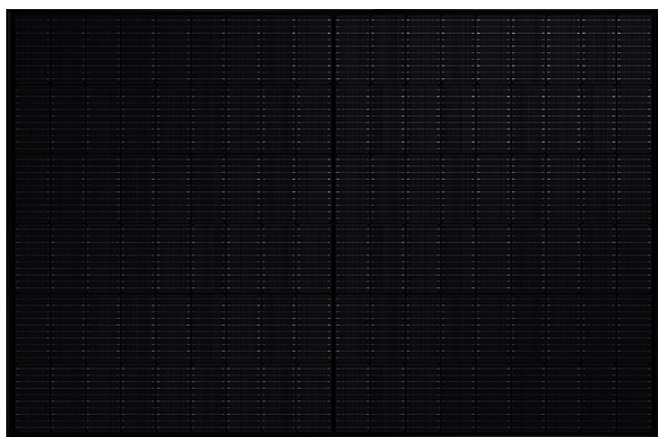

Breaking the 20 % efficiency barrier

TOPCon and Micro Gap cell layout
boosts module efficiency up to 21.5 %.



A reliable investment

Inclusive 25-year product warranty and 25-year linear
performance warranty.



Enduring high performance

Anti LeTID Technology,
Anti PID Technology and Hot-Spot Protect.



Innovative all-weather technology

Optimal yields, whatever the weather with excellent
low-light and temperature behaviour



Extreme weather rating

High-tech aluminium alloy frame, certified for
high snow (5400 Pa) and wind loads (4000 Pa).



The ideal solution for:



Rooftop arrays on
residential buildings

MECHANICAL SPECIFICATION

Cell Type	N-type Monocrystalline
Cell Dimensions	182x182mm
Cell Arrangement	108 (6x18)
Weight	21.5kg (46.4lbs)
Module Dimensions	1722×1134×30 mm (67.80×44.65×1.18 inches)
Cable Length	300mm in Length or Customized Length
Cable Cross Section Size	TUV: 4mm² (0.006inches²)/UL: 12AWG
Front Glass	3.2mm (0.13inches) AR Coating Tempered Glass
No. of Bypass Diodes	3
Packing Configuration (1)	36pcs/carton, 936pcs/40hq
Connector	MC4EV02 or MC4Compatible
Frame	Anodized Aluminium Alloy
Junction Box	IP68

ELECTRICAL PARAMETERS

Testing Condition			STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power	Pmpp	[W]	400	297	405	301	410	308	415	312	420	316
Operating Voltage	Vmpp	[V]	30.80	28.89	31.00	29.08	31.20	29.59	31.40	29.78	31.60	29.97
Operating Current	Impp	[A]	13.01	10.30	13.08	10.36	13.15	10.42	13.22	10.48	13.30	10.54
Open-Circuit Voltage	Voc	[V]	37.80	35.50	38.00	35.69	38.20	35.88	38.40	36.06	38.60	36.24
Short-Circuit Current	Isc	[A]	13.51	10.94	13.56	11.00	13.61	11.04	13.66	11.09	13.71	11.14
Module Efficiency	η	[%]	20.48		20.74		21.00		21.25		21.50	

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5 NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s


OPERATING CONDITIONS

Maximun System Voltage	1000V/1500V/DC(IEC)
Operating Temperature	-40°C ~ +85°C
Maximun Series Fuse	20A
Connector	MC4 Compatible

TEMPERATURE COEFFICIENT

Temperature Coefficient Pmax	-0.36%/°C
Temperature Coefficient Voc	-0.26%/°C
Temperature Coefficient Isc	+0.043%/°C
NMOT	43±2°C


TECHNICAL DRAWINGS

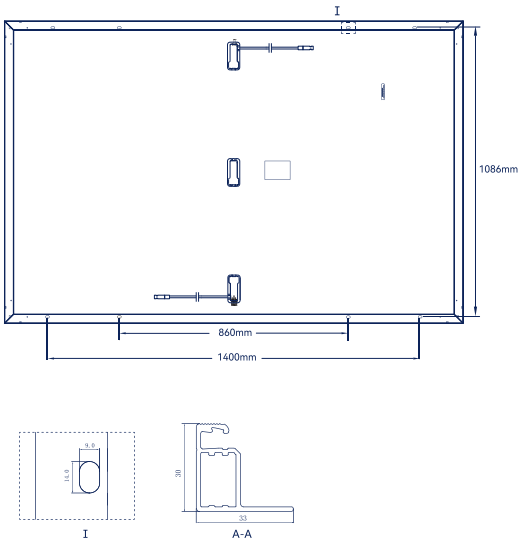

PACKAGING INFORMATION

Vertical packaging	70.86in 1800mm	47.24in 1200mm	43.30in 1100mm	1816lbs 824 kg	34 pallets	26 pallets	36 modules						

LINEAR PERFORMANCE WARRANTY

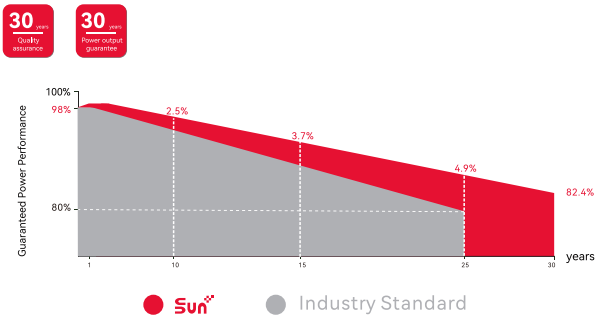

[1] Specifications included in this datasheet are subject to change without notice. SUNPLUS reserves the right of final interpretation. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

[2] Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

SUNPLUS OPTIMUM Inc.

90 STATE ST STE 700 OFFICE 40, ALBANY, NY 12207, USA | TEL +1 209.389.9861 | EMAIL info@wesunplus.com | WEB www.wesunplus.com