
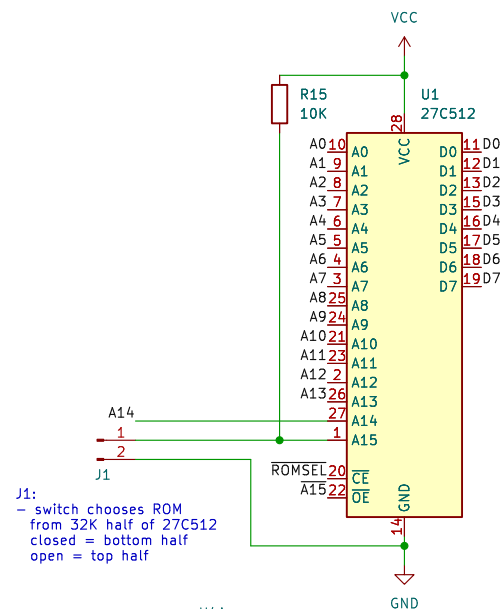
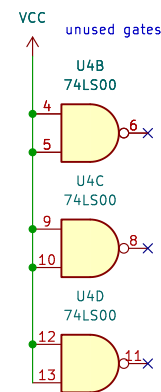

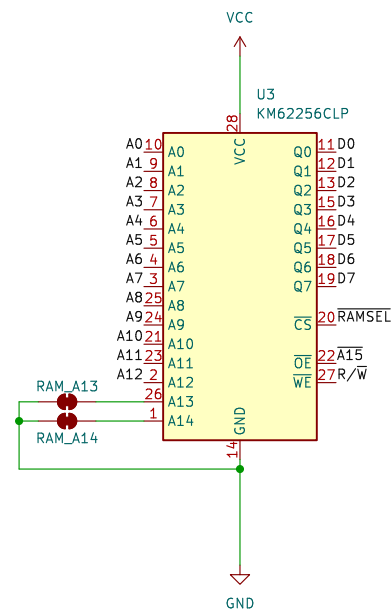
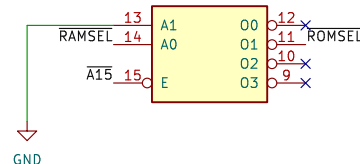



J2:
 - A14 from CPU (U2) pin 21 or U7 pin 7
 - A15 from CPU (U2) pin 22 or U7 pin 6
 - R/W from onboard RAM (U5) pin 21 or
 or gate array (U6) pin 31(?)
 or U3 pin 19(?)

J1:
 - switch chooses ROM from 32K half of 27C512: closed = bottom half, open = top half
 - RAM_A13 and RAM_A14 - close to use only 8K of RAM
 - RAM_A13 and RAM_A14 - open and connect jumper pins 2 (chip pins 1 and 26) to ??? port (???) to control which 8K bank is visible in \$8000-\$9FFF

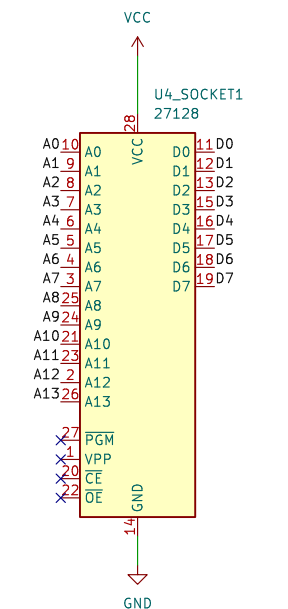

1551 RAM and ROM expansion
 Maciej Witkowiak, <ytm@elysium.pl>

YTM Enterprises

Sheet: /
 File: 1551-RAMBoard2-FirstBank.kicad_sch

Title: RAMBoard J1

Size: A4 Date: 2025-12-21
 KiCad E.D.A. 9.0.1

Rev: 1
 Id: 1/1