
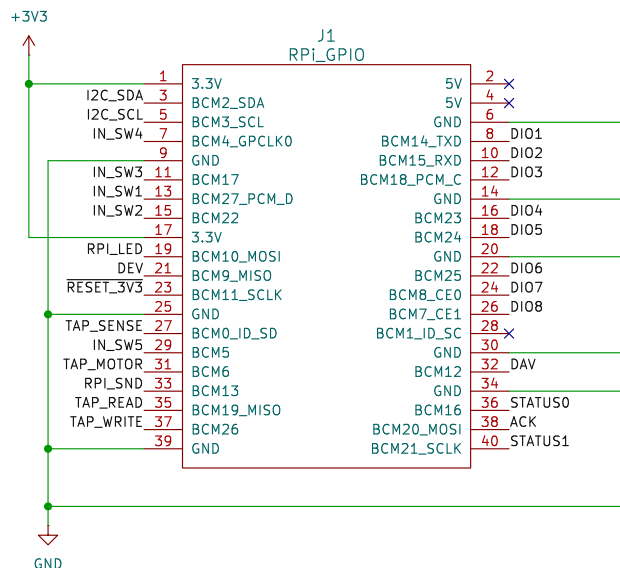




Required b/c depending on tcbm2sd version
RESET can be pulled to 5V or 3.3V
BAT54, BAS40, BAT43, 1n5819

Optional components

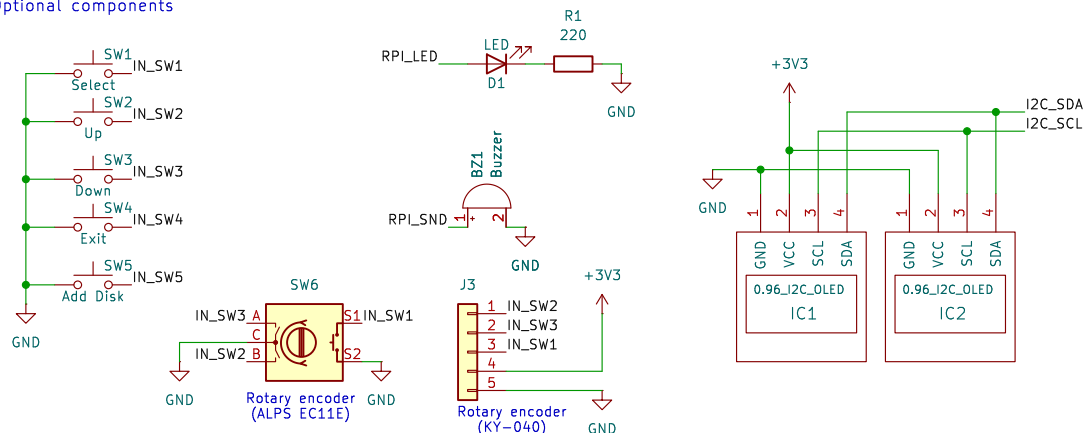


TAPE EMULATOR SECTION (optional as a whole and in parts)

all of these TAP_XXX -> CAS_XXX and CAS_XXX -> TAP_XXX
converters reverse the logic levels
all transistors are NPN:
2n3904 / BC547 / 58050 / etc.

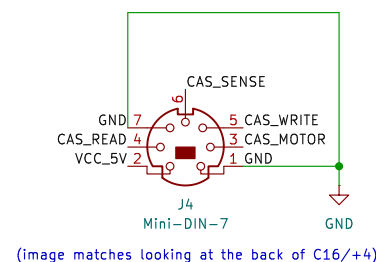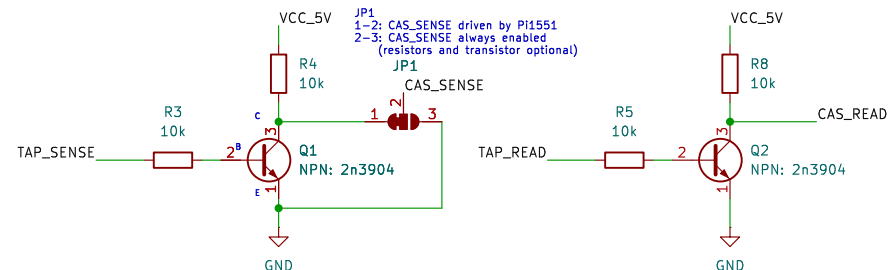


(image matches looking at the back of C16/+4)



(order most convenient for a piece of ribbon cable soldered to a standalone Mini-Din 7 plug - around the perimeter)

- H1 MountingHole
- H2 MountingHole
- H3 MountingHole
- H4 MountingHole

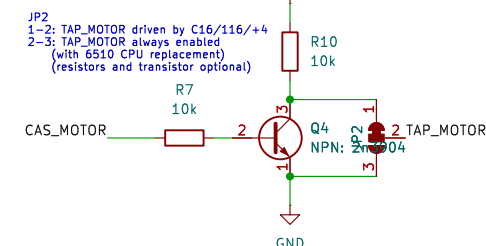

Maciej Witkowiak <ytm@elysium.pl>

YTM Enterprises

Sheet: /

File: RPi_Hat.kicad_sch

Title: Pi1551 Hat

Size: A4

Date: 2025-12-15

KiCad E.D.A. 9.0.6

Rev: 2

Id: 1/1