



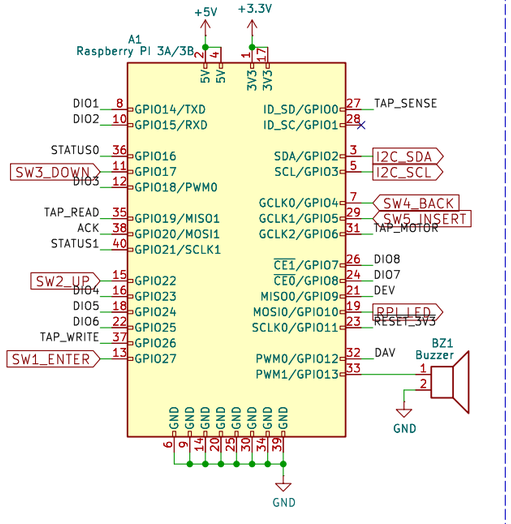


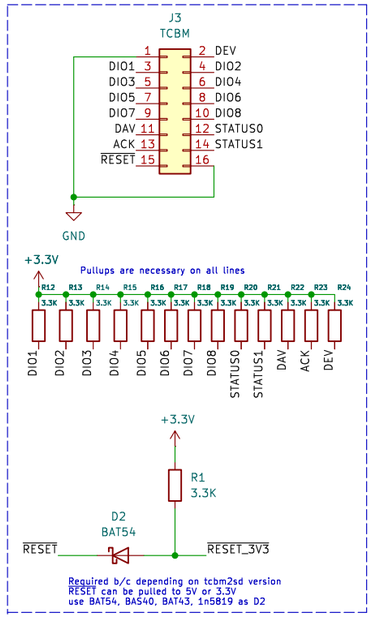



(image matches looking at the back of C16/+4)

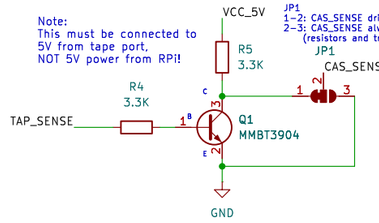

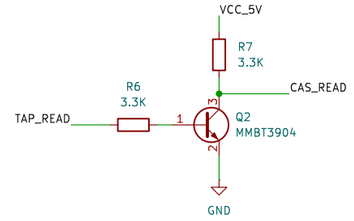



TAPE EMULATOR

all of these TAP_xxx -> CAS_xxx and CAS_xxx -> TAP_xxx
converters reverse the logic levels
all transistors are NPN:
2n3904 / BC547 / S8050 / etc.


Note: SMD transistors have different pinouts
THT: B on 2 and E on 1 (EBC) (2N3904)
SMD: B on 1 and E on 2 (BEC) (MMBT3904 also sold as 2n3904)

Power section





* Resistor values need to be adjusted according to type of LED installed on front panel. Sensible values for bright LEDs is significantly higher than what is specified.



(RPi rotated to expose ports)

Sheet: /		
File: Pi1551-III Module-rotated.kicad_sch		
Title: *PI1541-III Module (rotated)*		
Size: A3	Date: 2026-03-10	**Rev: 2**
KiCad E.D.A. 9.0.7		Id: 1/1