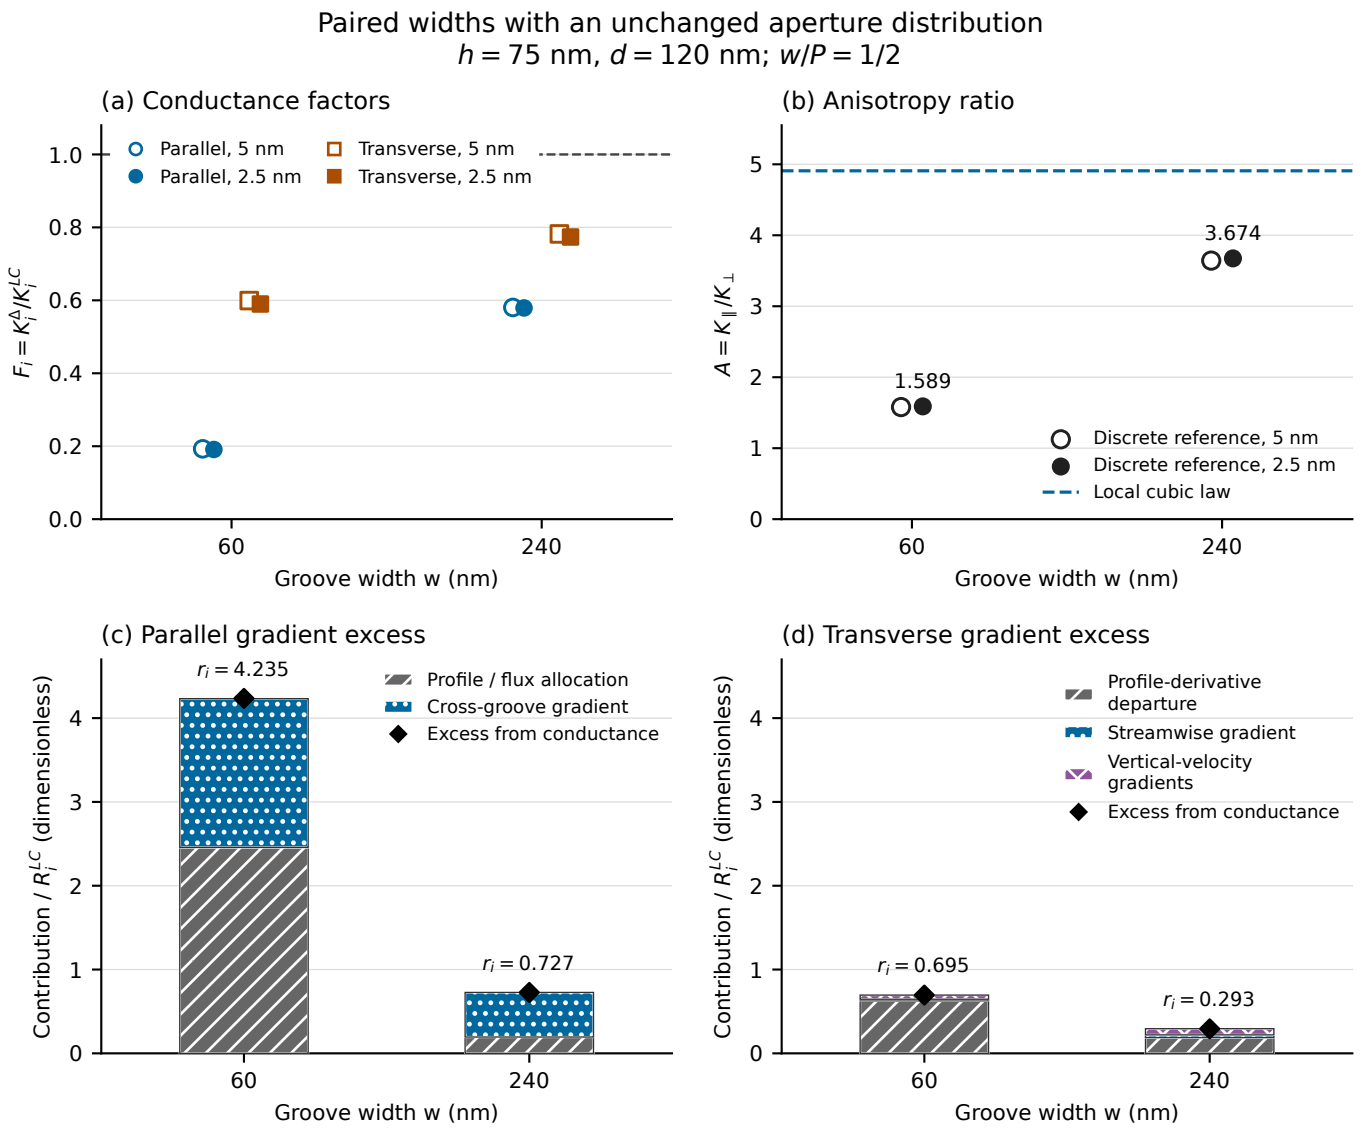

Paired widths with an unchanged aperture distribution
h = 75 nm, d = 120 nm; w/P = 1/2
(a) Conductance factors
Parallel, 5 nm
Parallel, 2.5 nm
Transverse, 5 nm
Transverse, 2.5 nm
F_i = K_i^Δ / K_i^LC
1.0
0.8
0.6
0.4
0.2
0.0
60
240
Groove width w (nm)
(b) Anisotropy ratio
A = K_∥ / K_⊥
5
4
3
2
1
0
3.674
1.589
Discrete reference, 5 nm
Discrete reference, 2.5 nm
Local cubic law
60
240
Groove width w (nm)
(c) Parallel gradient excess
r_i = 4.235
r_i = 0.727
Profile / flux allocation
Cross-groove gradient
Excess from conductance
Contribution / R_i^LC (dimensionless)
4
3
2
1
0
60
240
Groove width w (nm)
(d) Transverse gradient excess
Profile-derivative departure
Streamwise gradient
Vertical-velocity gradients
Excess from conductance
r_i = 0.695
r_i = 0.293
Contribution / R_i^LC (dimensionless)
4
3
2
1
0
60
240
Groove width w (nm)