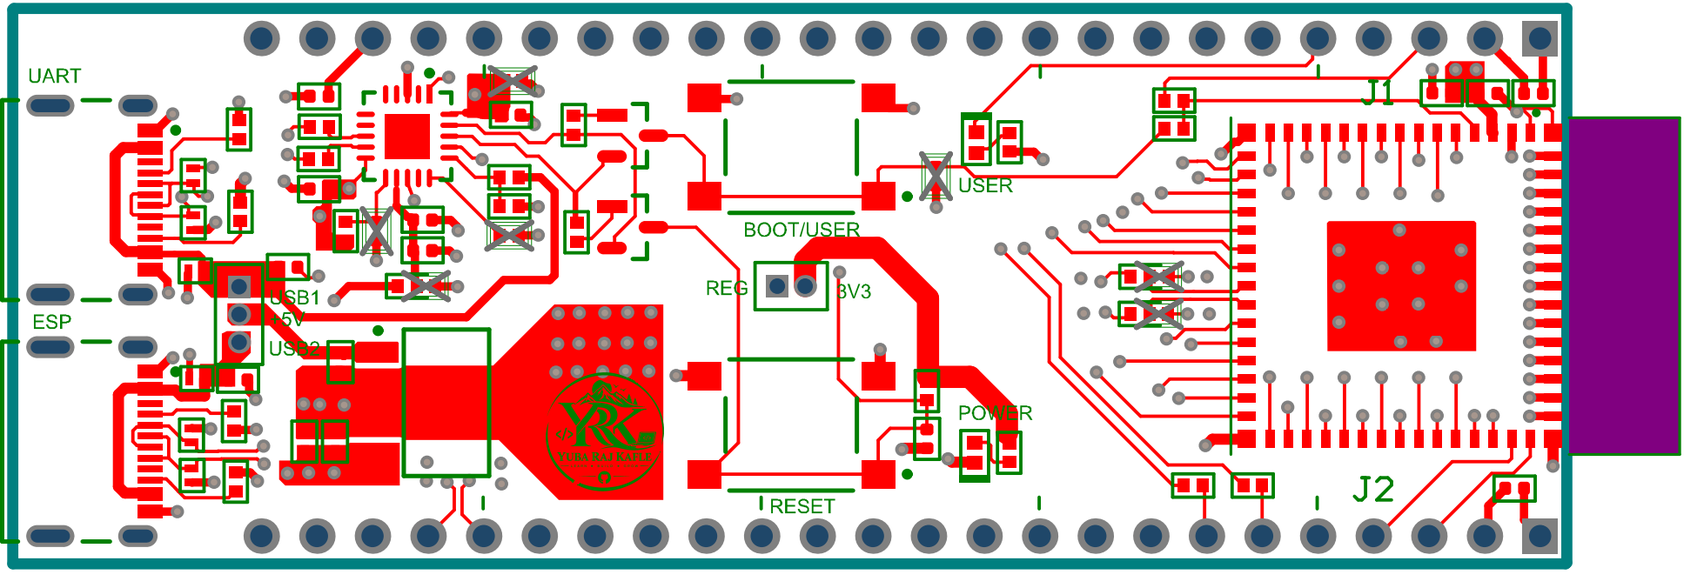
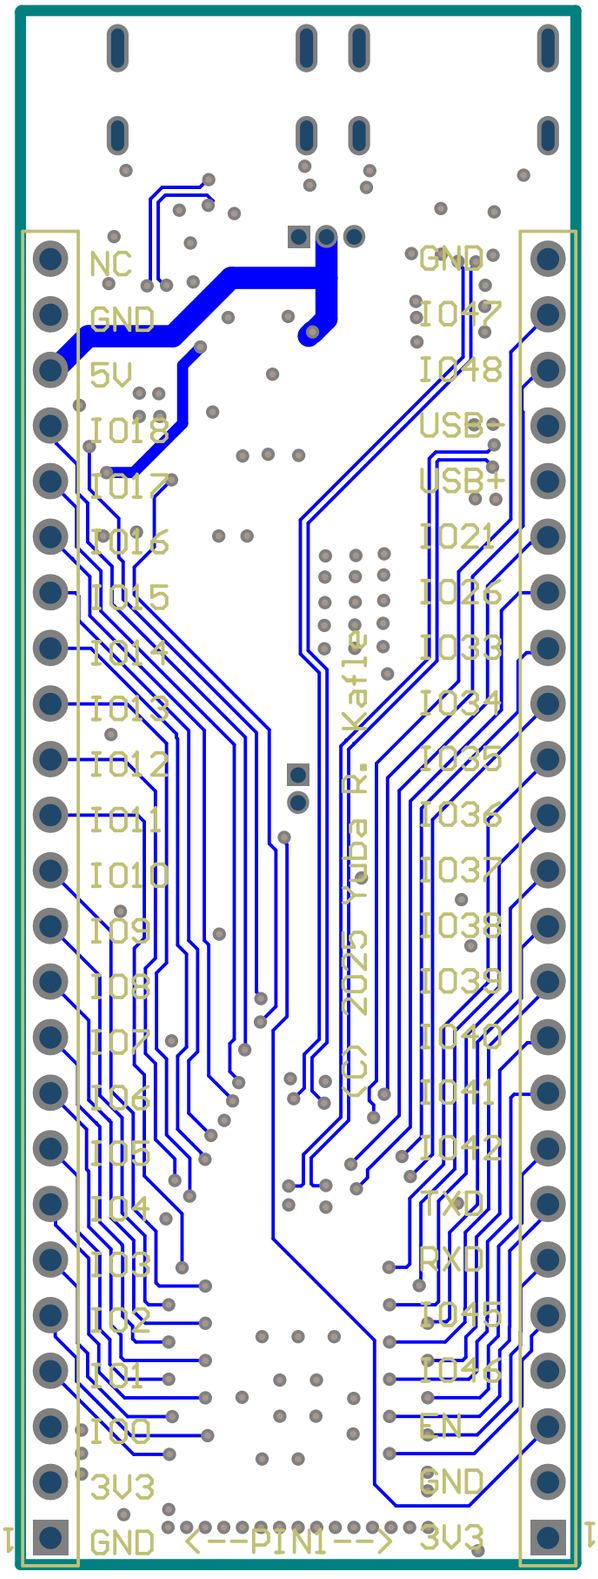
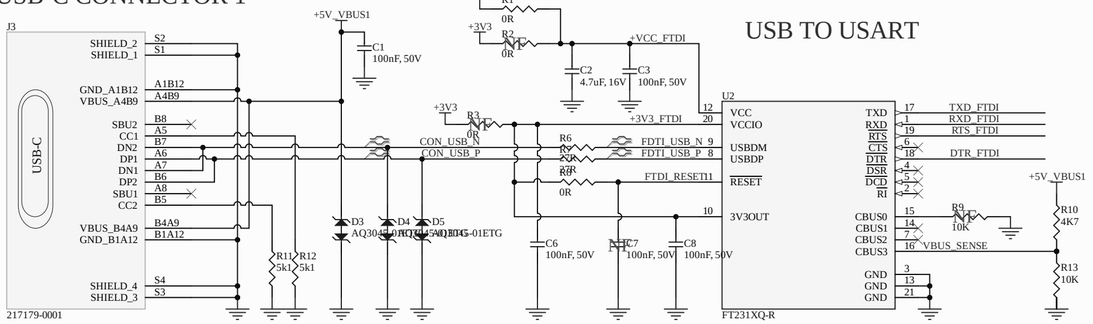

UART
ESP
USB1
+5V
USB2
BOOT/USER
REG
3V3
USER
POWER
RESET
J1
J2


NC
GND
5V
IO18
IO17
IO16
IO15
IO14
IO13
IO12
IO11
IO10
IO9
IO8
IO7
IO6
IO5
IO4
IO3
IO2
IO1
IO0
3V3
GND
GND
IO47
IO48
USB-
USB+
IO21
IO26
IO33
IO34
IO35
IO36
IO37
IO38
IO39
IO40
IO41
IO42
TXD
RXD
IO45
IO46
EN
GND
3V3
<--PIN1-->
(C) 2025 Yuba R. Kafle

# ESP32 WITH USB-C

## USB-C CONNECTOR 1





Design note:
If in Self Powered Configuration, set CBUS3 as VBUS SENSE.

## USB TO USART

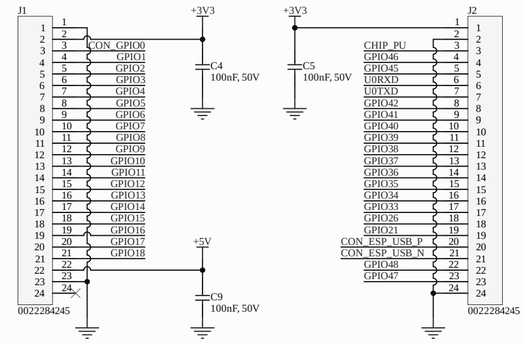
## POWER LED




## USER LED




## HEADERS




Design notes:
+5V and/or 3V3 can be possibly used as an input power(if configured correctly).

## USB-C CONNECTOR 2




## 5V POWER SELECTION





## 3V3 POWER SELECTION





## 5V TO 3V3





## SERIAL SIGNAL SIGNALLING



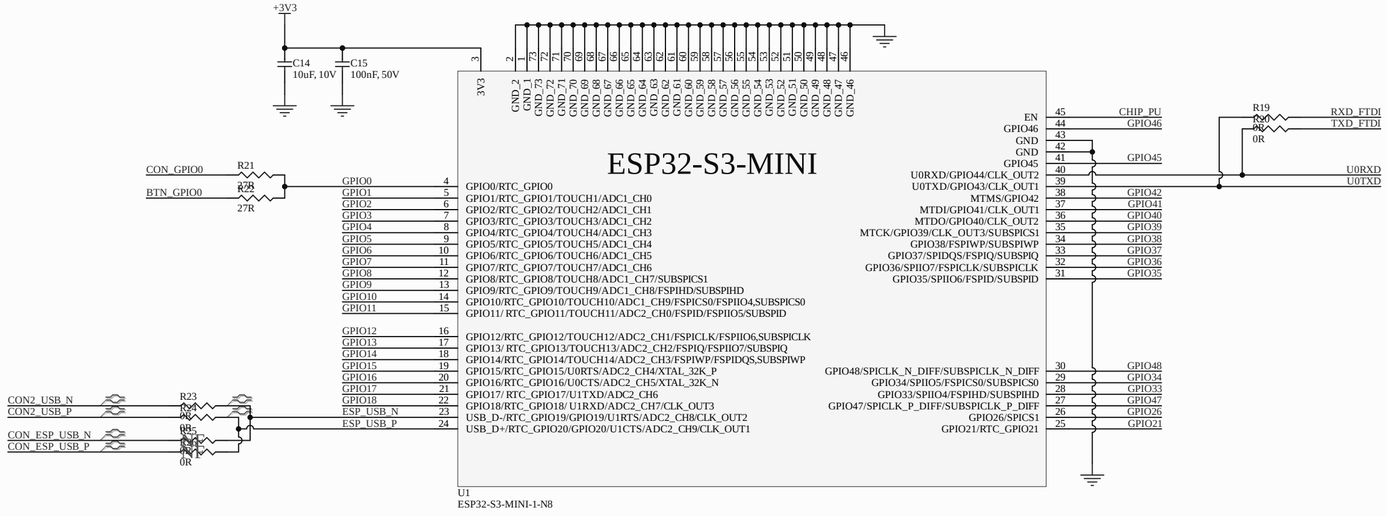

## RESET BUTTON




## BOOT/USER BUTTON




## ESP32 MODULE




| | | | |
|---|---|---|---|
| Title | ESP32 WITH USB-C | | |
| Size: A2 | Number: | | Revision: |
| Date: 10/18/2026 | | Sheet of | |
| File: D:\Project\..\ESP32 with USBC.SchDoc | | Drawn By: | |