

# **RAJALAKSHMI ENGINEERING COLLEGE**

**An Autonomous Institution**

**Affiliated to Anna University, Chennai,  
Rajalakshmi Nagar, Thandalam – 602 105**



**RAJALAKSHMI  
ENGINEERING COLLEGE**

An AUTONOMOUS Institution  
Affiliated to ANNA UNIVERSITY, Chennai

## **DEPARTMENT OF ARTIFICIAL INTELLIGENCE AND MACHINE LEARNING**

**CS19541 - COMPUTER NETWORKS**

**Laboratory Record Note Book**

Name : ..... YUKESH S .....

Register No. : ..... 2116221501183 .....

Year / Branch / Section : ..... III / AIML /C .....

Semester : ..... V .....

Academic Year: ..... 2024-2025 .....

**RAJALAKSHMI ENGINEERING COLLEGE**  
An Autonomous Institution  
Affiliated to Anna University, Chennai,  
Rajalakshmi Nagar, Thandalam – 602 105

**BONAFIDE CERTIFICATE**

**Name:** YUKESH S

**Academic Year:** 2024-2025 **Semester:** V **Branch:** AIML .....

**Register No.**

**2116221501183**

*Certified that this is the bonafide record of work done by the above student in  
the ..... CS19541-C O M P U T E R N E T W O R K S Laboratory  
during the academic year 2024- 2025*

**Signature of Faculty in-charge**

Submitted for the Practical Examination held on ..... 20-11-2024

**Internal Examiner**

**External Examiner**

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **List of Experiments**

<b><u>List of Experiments</u></b>		
1.	<b>Study of various Network commands used in Linux and Windows:</b>  Hands-on practice of various network commands.	[4]
2.	<b>Study of Network cables.</b>  1. Understand different types of Network cables. 2. Make a cross-wired cable and straight through cable using clamping/crimping tool.	[4]
3.	<b>Experiments on CISCO PACKET TRACER (Simulation Tool):</b>  a) To understand environment of CISCO PACKET TRACER to design simple network. b) Analyse the behaviour of network devices using CISCO PACKET TRACER simulator.  Design a simple network with multiple nodes and connect via networking devices available in library. Perform simulation and trace communication behaviour of specified network devices.  1: Use only HUB to design a small network having 4 to 6 hosts 2: Use only a Switch to design a small network with 4 to 6 hosts. 3: Use both the device (HUB and SWITCH) for a network and find out functioning difference between switch and hub.  <b>Find out the network topology implemented in your college and draw and label that topology in your observation book.</b>	[2] [2]
4.	a) <b>Setup and configure a LAN (Local area network) using a Switch and Ethernet cables in your lab.</b>  1. Connect 3-4 host machines to a switch. 2. Assign ip addresses to each host machine. 3. Check the connectivity between the machines by using ping command. 4. Share and access files and folder across the machines of the LAN.	[2]

## **CS19541-COMPUTER NETWORKS-LAB** **RECORD**

5.	<p><b>Experiments on Packet capture tool: Wireshark</b></p> <p>To understand the features of wireshark as a packet capture tool and understand <b>encapsulation of information at various layers of a Protocol stack.</b></p>	[4]
6.	<p><b>Error Correction at Data Link Layer:</b></p> <p>Write a program to implement error detection and correction using HAMMING code concept. Make a test run to input data stream and verify error correction feature.</p>	[4]
7.	<p><b>Flow control at Data Link Layer:</b></p> <p>Write a program to implement flow control at data link layer using SLIDING WINDOW PROTOCOL. Simulate the flow of frames from one node to another.</p>	[4]
8.	<p><b>Virtual LAN:</b></p> <ul style="list-style-type: none"> <li>a) Simulate Virtual LAN configuration using CISCO Packet Tracer Simulation.</li> <li>b) There are 10 faculty in Robotics department sitting in 3 different blocks. Design and configure a Virtual LAN for Robotics department (using switch and Ethernet cables) so that all the faculty are logically in the same LAN.</li> </ul> <p><b>Wireless LAN:</b></p> <ul style="list-style-type: none"> <li>c) Configuration of Wireless LAN using CISCO Packet Tracer.</li> </ul>	[4] [2]
9.	<p><b>Implementation of SUBNETTING in CISCO PACKET TRACER simulator.</b></p> <ul style="list-style-type: none"> <li>a) Design multiple subnet with suitable number of hosts.</li> <li>b) Assign static IP address across all subnet and connect the subnets via Router.</li> <li>c) Simulate packet transmission across the subnets and observe the results:- <ul style="list-style-type: none"> <li>a. When subnets are connected via a router.</li> <li>b. When subnets are not connected without a router.</li> </ul> </li> </ul>	[4]

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

10.	<p><b>Internetworking with routers in CISCO PACKET TRACER simulator.</b></p> <p><b>a) Design and configure a simple internetwork using a router.</b></p> <ol style="list-style-type: none"> <li>1. Design different networks (with 3 to 4 hosts) and connect via Router.</li> <li>2. Allot static ip address to machines and router interfaces.</li> <li>3. Perform simulation and trace how routing is done in packet transmission.</li> </ol> <p><b>b) Design and configure an internetwork using wireless router DHCP server and internet cloud.</b></p> <p><b>c) Design and configure an inter-network in your lab using switch, router and Ethernet cables.</b></p>	[4]   [2]
11.	<p><b>Routing at Network Layer:</b></p> <p>a) Simulate Static Routing Protocol Configuration using CISCO Packet Tracer.</p> <p>b) Simulate RIP using CISCO Packet Tracer.</p>	[4]
12.	<p><b>End –End Communication at Transport Layer</b></p> <p>a) Implement echo client server using TCP/UDP sockets.</p> <p>b) Implement a chat program using socket programming.</p>	[4]
13.	Implement your own ping program.	[2]
14.	Write a code using RAW sockets to implement packet sniffing.	[4]
15.	Analyse various types of servers using Webalizer tool.	[4]
<b>Total</b>		<b>60 hours</b>

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

<b>Additional programs for practice</b>		
1.	<b>Data Link Layer (Frame Generation):</b> Write a program to read a stream of data from data file (Having Characters) to create BSC frames by implementing character stuffing concept and inserting control characters. The receiving program must execute on other computer and decode received bytes and write to a file.	
2.	Demonstrate Configuration of Network Address Translation (NAT) and Port Address Translation (PAT) using CISCO Packet Tracer simulation.	
3.	Implement a static routing protocol which also displays the routing table details after every update.	
4.	Implement a dynamic routing protocol which also displays the routing table after every updates.	
5.	Implement FTP server using socket programming.	

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Practical -1**

### **AIM: - Study of various Network commands used in Linux and Windows:**

#### **BASIC NETWORKING COMMANDS:**

**arp -a**:- ARP is short form of address resolution protocol, It will show the IP address of your computer along with the IP address and MAC address of your router.

**hostname**: This is the simplest of all TCP/IP commands. It simply displays the name of your computer.

**ipconfig /all**: This command displays detailed configuration information about your TCP/IP connection including Router, Gateway, DNS, DHCP, and type of Ethernet adapter in your system

**nbtstat -a**: This command helps solve problems with NetBIOS name resolution. (Nbt stands for NetBIOS over TCP/IP)

**netstat**: (network statistics) netstat displays a variety of statistics about a computers active TCP/IP connections. It is a command line tool for monitoring network connections both incoming and outgoing as well as viewing routing tables, interface statistics etc.

e.g.: netstat -r

**nslookup**: (name server lookup) is a tool used to perform DNS lookups in Linux. It is used to display DNS details, such as the IP address of a particular computer, the MX records for a domain or the NS servers of a domain. nslookup can operate in two modes: interactive and non-interactive.

e.g.: nslookup [www.google.com](http://www.google.com)

**pathping**: Pathping is unique to Window's, and is basically a combination of the Ping and Tracert commands. Pathping traces the route to the destination address then launches a 25 second test of each router along the way, gathering statistics on the rate of data loss along each hop.

**ping**: (Packet INternet Groper) command is the best way to test connectivity between two nodes. Ping use ICMP (Internet Control Message Protocol) to communicate to other devices.

1. #ping hostname( ping localhost)
2. #ping ip address (ping 4.2.2.2)
3. #ping fully qualified domain name(ping [www.facebook.com](http://www.facebook.com))

**Route**: route command is used to show/manipulate the IP routing table. It is primarily used to setup static routes to specific host or networks via an interface.

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB**

## **RECORD**

### **Some important Linux networking commands**

#### **1. ip**

The ip command is one of the basic commands every administrator will need in daily work, from setting up new systems and assigning IPs to troubleshooting existing systems. The ip command can show address information, manipulate routing, plus display network various devices, interfaces, and tunnels.

**ip <OPTIONS> <OBJECT> <COMMAND>**

Here are some common use cases for the ip command.

- a. To show the IP addresses assigned to an interface on your server:  
[root@server ~]# *ip address show*
- b. To assign an IP to an interface, for example, **enps03**:  
[root@server ~]# *ip address add 192.168.1.254/24 dev enps03*
- c. To delete an IP on an interface:  
[root@server ~]# *ip address del 192.168.1.254/24 dev enps03*
- d. Alter the status of the interface by bringing the interface **eth0** online:  
[root@server ~]# *ip link set eth0 up*
- e. Alter the status of the interface by bringing the interface **eth0** offline:  
[root@server ~]# *ip link set eth0 down*
- f. Alter the status of the interface by enabling promiscuous mode for **eth0**:  
[root@server ~]# *ip link set eth0 promisc on*
- g. Add a default route (for all addresses) via the local gateway 192.168.1.254 that can be reached on device **eth0**:  
[root@server ~]# *ip route add default via 192.168.1.254 dev eth0*
- h. Add a route to 192.168.1.0/24 via the gateway at 192.168.1.254:  
[root@server ~]# *ip route add 192.168.1.0/24 via 192.168.1.254*
- i. Add a route to 192.168.1.0/24 that can be reached on device **eth0**:  
[root@server ~]# *ip route add 192.168.1.0/24 dev eth0*
- j. Delete the route for 192.168.1.0/24 via the gateway at 192.168.1.254:  
[root@server ~]# *ip route delete 192.168.1.0/24 via 192.168.1.254*
- k. Display the route taken for IP 10.10.1.4:  
[root@server ~]# *ip route get 10.10.1.4*

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **2. ifconfig**

---

The ifconfig command was/is a staple in many sysadmin's tool belt for configuring and troubleshooting networks. It has since been replaced by the ip command discussed above.

## **3. mtr**

---

MTR (Matt's traceroute) is a program with a command-line interface that serves as a network diagnostic and troubleshooting tool. This command combines the functionality of the ping and traceroute commands. Just like a traceroute, the mtr command will show the route from a computer to a specified host. mtr provides a lot of statistics about each hop, such as response time and percentage. With the mtr command, you will get more information about the route and be able to see problematic devices along the way. If you see a sudden increase in response time or packet loss, then obviously, there is a bad link somewhere.

The syntax of the command is as follows:

**mtr <options> hostname/IP**

Let's look at some common use cases.

- a. The basic mtr command shows you the statistics, including each hop (hostnames) with time and loss%:

```
[root@server ~]# mtr google.com
```

- b. Show numeric IP addresses (if you use -g, you will get IP addresses (numbers) instead of hostnames):

```
[root@server ~]# mtr -g google.com
```

- c. Show the numeric IP addresses and hostnames, too:

```
[root@server ~]# mtr -b google.com
```

- d. Set the number of pings that you want to send:

```
[root@server ~]# mtr -c 10 google.com
```

---

## **4. tcpdump**

---

The tcpdump command is designed for capturing and displaying packets.

You can install tcpdump with the command below:

```
[root@server ~]# dnf install -y tcpdump
```

Before starting any capture, you need to know which interfaces tcpdump can use. You will need to use sudo or have root access in this case.

```
[root@server ~]# tcpdump -D
```

If you want to capture traffic on **eth0**, you can initiate that with tcpdump -i eth0 sample output:

```
[root@server ~]# tcpdump -i eth0
```

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

```
[root@server ~]# tcpdump -i eth0 -c 10
```

## ***Capture traffic to and from one host***

You can filter out traffic coming from a specific host. For example, to find traffic coming from and going to 8.8.8.8, use the command:

```
[root@server ~]# tcpdump -i eth0 -c 10 host 8.8.8.8
```

For traffic coming from 8.8.8.8, use:

```
[root@server ~]# tcpdump -i eth0 src host 8.8.8.8
```

For outbound traffic going to 8.8.8.8, use:

```
[root@server ~]# tcpdump -i eth0 dst host 8.8.8.8
```

## ***Capture traffic to and from a network***

You can also capture traffic to and from a specific network using the command below:

```
[root@server ~]# tcpdump -i eth0 net 10.1.0.0 mask 255.255.255.0
```

or:

```
[root@server ~]# tcpdump -i eth0 net 10.1.0.0/24
```

## ***Capture traffic to and from port numbers***

Capture only DNS port 53 traffic:

```
[root@server ~]# tcpdump -i eth0 port 53
```

For a specific host,

```
[root@server ~]# tcpdump -i eth0 host 8.8.8.8 and port 53
```

To capture only HTTPS traffic,

```
[root@server ~]# tcpdump -i eth0 -c 10 host www.google.com and port 443
```

To capture all port except port 80 and 25,

```
[root@server ~]# tcpdump -i eth0 port not 53 and not 25
```

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

### **5. ping**

Ping is a tool that verifies IP-level connectivity to another TCP/IP computer by sending Internet Control Message Protocol (ICMP) Echo Request messages. The receipt of corresponding Echo Reply messages is displayed, along with round-trip times. Ping is the primary TCP/IP command used to troubleshoot connectivity, reachability, and name resolution.

```
[root@server ~]# ping google.com
PING google.com (216.58.206.174) 56(84) bytes of data.
64 bytes from sof02s27-in-f14.1e100.net (216.58.206.174): icmp_seq=1 ttl=56 time=10.7
ms
64 bytes from sof02s27-in-f14.1e100.net (216.58.206.174): icmp_seq=2 ttl=56 time=10.2
ms
64 bytes from sof02s27-in-f14.1e100.net (216.58.206.174): icmp_seq=3 ttl=56 time=10.4
ms
^C
```

You need to stop the ping command by pressing **CTRL+C**. Otherwise, it will ping until you stop it.

If you want to ping a host ten times, use the following command:

```
[root@server ~]# ping -c 10 google.com
```

While pinging a host, you'll find different output from the ping results, including the following three examples.

#### ***Destination Host Unreachable***

The possible best reason is there is no route from the local host system and to the destination desired destination host, or a remote router reports that it has no route to the destination host.

#### ***Request timed out***

This result means that no Echo Reply messages were received within the default time of one second or the time that you set while you are pinging that host. This can be due to many different causes; the most common include network congestion, failure of the ARP request, packet filtering/firewall, etc.

#### ***Unknown host/Ping Request Could Not Find Host***

Maybe you misspelled the hostname or the host does not exist at all in the network.

You must have 0% packet loss for every ping result with a good latency or lower response time. Depending on which transmission medium (UTP, fibre optics cable, Wi-Fi) you're using, your latency will differ.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB**

## **RECORD**

### **Configuring an Ethernet connection by using nmcli**

If you connect a host to the network over Ethernet, you can manage the connection's settings on the command line by using the **nmcli** utility.

#### **Procedure**

1. List the NetworkManager connection profiles:

```
# nmcli connection show
NAME           UUID            TYPE      DEVICE
Wired connection 1  a5eb6490-cc20-3668-81f8-0314a27f3f75  ethernet  enp1s0
```

2. **# nmcli connection add con-name <connection-name> ifname <device-name> type ethernet**  
Skip this step to modify an existing profile.

3. Optional: Rename the connection profile:

```
# nmcli connection modify "Wired connection 1"
Here, "Wired connection 1" is the name of the connection
```

4. Display the current settings of the connection profile:

```
# nmcli connection show
```

```
connection.interface-name:  enp1s0
connection.autoconnect:    yes
ipv4.method:              auto
ipv6.method:              auto
```

5. Configure the IPv4 settings:

- To use DHCP, enter:

```
# nmcli connection modify "Wired connection 1" ipv4.method auto
Skip this step if ipv4.method is already set to auto (default).
```

- To set a static IPv4 address, network mask, default gateway, DNS servers, and search domain, enter:

```
# nmcli connection modify "Wired connection 1" ipv4.method manual
ipv4.addresses 192.0.2.1/24 ipv4.gateway 192.0.2.254 ipv4.dns 192.0.2.200
ipv4.dns-search example.com
```

6. Configure the IPv6 settings:

- To use stateless address autoconfiguration (SLAAC), enter:

```
# nmcli connection modify "Wired connection 1" ipv6.method auto
Skip this step if ipv6.method is already set to auto (default).
```

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

- To set a static IPv6 address, network mask, default gateway, DNS servers, and search domain, enter:

```
# nmcli connection modify "Wired connection 1" ipv6.method manual
ipv6.addresses 2001:db8:1::fffe/64 ipv6.gateway 2001:db8:1::ffffe ipv6.dns
2001:db8:1::ffbb ipv6.dns-search example.com
```

7. Activate the profile:

```
# nmcli connection up Internal-LAN
```

### **Verification**

1. Display the IP settings of the NIC:

```
# ip address show enp1s0
enp1s0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel
    state UP group default qlen 1000
    link/ether 52:54:00:17:b8:b6 brd ff:ff:ff:ff:ff:ff
    inet 192.0.2.1/24 brd 192.0.2.255 scope global noprefixroute enp1s0
        valid_lft forever preferred_lft forever
    inet6 2001:db8:1::fffe/64 scope global noprefixroute
        valid_lft forever preferred_lft forever
```

2. Display the IPv4 default gateway:

```
# ip route show default
```

```
default via 192.0.2.254 dev enp1s0 proto static metric 102
```

3. Display the IPv6 default gateway:

```
# ip -6 route show default
```

```
default via 2001:db8:1::ffee dev enp1s0 proto static metric 102 pref medium
```

4. Display the DNS settings:

```
# cat /etc/resolv.conf
```

```
search example.com
nameserver 192.0.2.200
nameserver 2001:db8:1::ffbb
If multiple connection profiles are active at the same time, the order
of nameserver entries depend on the DNS priority values in these profile and the
connection types.
```

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB** **RECORD**

5. Use the ping utility to verify that this host can send packets to other hosts:

```
# ping <host-name-or-IP-address>
```

### **Troubleshooting**

- Verify that the network cable is plugged-in to the host and a switch.
- Check whether the link failure exists only on this host or also on other hosts connected to the same switch.
- Verify that the network cable and the network interface are working as expected. Perform hardware diagnosis steps and replace defect cables and network interface cards.
- If the configuration on the disk does not match the configuration on the device, starting or restarting NetworkManager creates an in-memory connection that reflects the configuration of the device.

### **Student Observation:**

1. Which command is used to find the reachability of a host machine from your device?
2. Which command will give the details of hops taken by a packet to reach its destination?
3. Which commands displays the ip configuration of your machine.
4. Which command displays the TCP port status in your machine?
5. Write the modify the ip configuration in a Linux machine.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**



## **Practical-2**

### **Aim: Study of different types of Network cables.**

#### a) **Understand different types of network cable.**

Different type of cables used in networking are:

1. Unshielded Twisted Pair (UTP) Cable
2. Shielded Twisted Pair (STP) Cable
3. Coaxial Cable
4. Fibre Optic Cable

Cable type	Category	Maximum Data Transmission	Advantages/Disadvantages	Application/Use	Image
UTP	Category 3	10 bps	<b>Advantages</b> <ul style="list-style-type: none"> <li>• Cheaper in cost</li> <li>• Easy to install as they have a smaller overall diameter.</li> </ul> <b>Disadvantages</b> <ul style="list-style-type: none"> <li>• More prone to (EMI) Electromagnetic interference and noise</li> </ul>	10Base-T Ethernet	
	Category 5	Up to 100 Mbps		Fast Ethernet, Gigabit Ethernet	
	Category 5e	1Gbps		Fast Ethernet, Gigabit Ethernet	
STP	Category 6,6a	10Gbps	<b>Advantages</b> <ul style="list-style-type: none"> <li>• Shielded.</li> <li>• Faster than UTP.</li> <li>• Less susceptible to noise and interference</li> </ul> <b>Disadvantages</b> <ul style="list-style-type: none"> <li>• Expensive</li> <li>• Greater installation effort</li> </ul>	Gigabit Ethernet, 10G Ethernet (55m) Widely used in data centres	
SSTP	Category 7		Gigabit Ethernet, 10G Ethernet (100m)		

## **CS19541-COMPUTER NETWORKS-LAB**

---

## **CS19541-COMPUTER NETWORKS-LAB** **RECORD**

Coaxial cable	RG-6 RG-59 RG-11	10-100Mbps	<ul style="list-style-type: none"> <li>• High bandwidth</li> <li>• Immune to interference</li> <li>• Low loss bandwidth</li> <li>• Versatile</li>   <li>• <b>Disadvantages</b></li> <li>• Limited distance</li> <li>• Cost</li> <li>• Size is bulky</li> </ul>	Speed of signal is 500m Television network High speed internet connections	
fibre optics cable	Single mode Multi mode	100Gbps	<p><b>Advantages</b></p> <ul style="list-style-type: none"> <li>• High speed</li> <li>• High bandwidth</li> <li>• High security</li> <li>• Long distance</li> </ul> <p><b>Disadvantages</b></p> <ul style="list-style-type: none"> <li>• Expensive</li> <li>• Requires skilled installers</li> </ul>	<ul style="list-style-type: none"> <li>• Maximum distance of fibre optics cable is around 100meters</li> </ul>	

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---


# CS19541-COMPUTER NETWORKS-LAB

## RECORD

### b) Make Your Own Ethernet Cross-Over Cable/ Straight cable

Tools and parts needed:


- Ethernet cabling. CAT5e is certified for gigabit support, but CAT5 cabling works as well, just over shorter distances.
- A crimping tool. This is an all-in-one networking tool shaped to push down the pins in the plug and strip and cut the shielding off the cables.
- Two RJ45 plugs.
- Optional two plug shields.

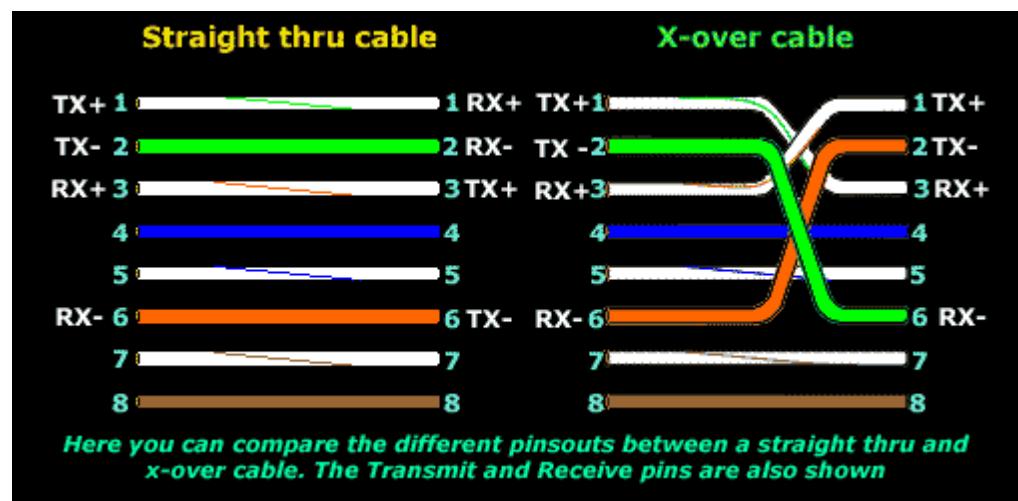

Difference between crossover cable and straight cable

Take a print

**Straight through network cable: both sides should be A**  
**Crossover cable: One side A, one side B**

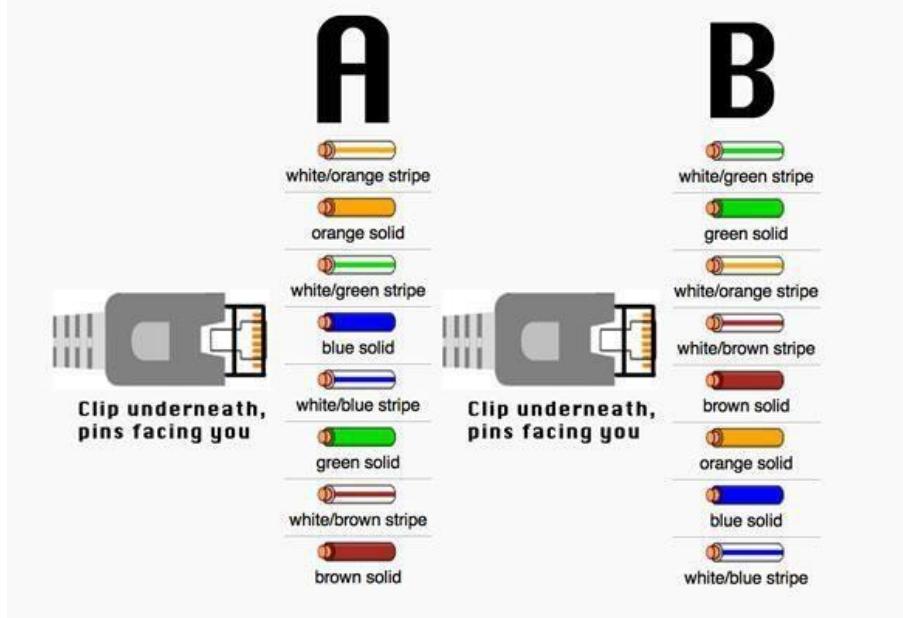


**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**


---

## **CS19541-COMPUTER NETWORKS-LAB** **RECORD**

**Step 1:** To start construction of the device, begin by threading shields onto the cable.

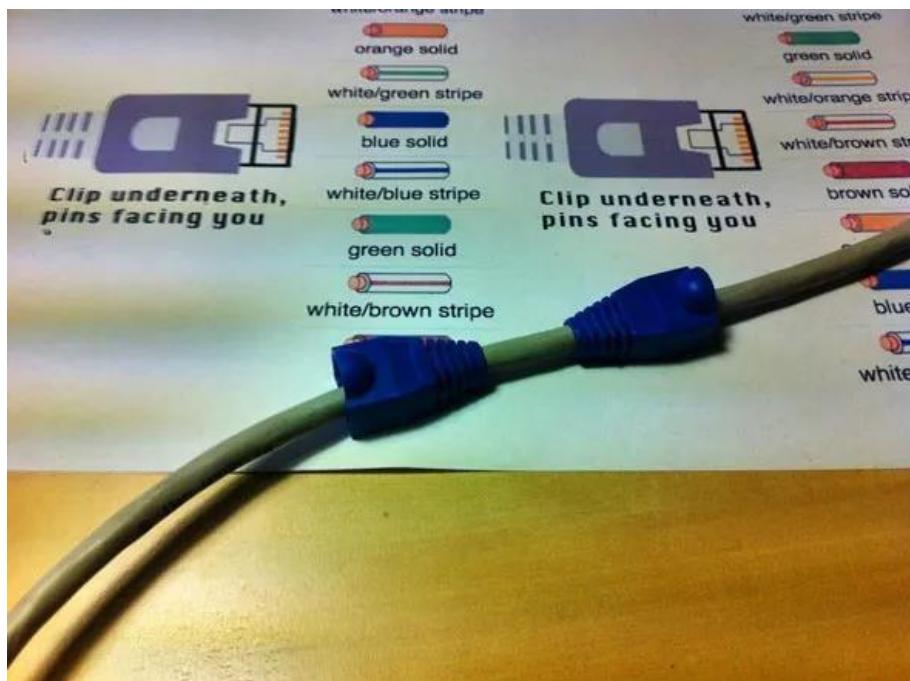

**Step 2:** Next, strip approximately 1.5 cm of cable shielding from both ends. The crimping tool has a round area to complete this task.

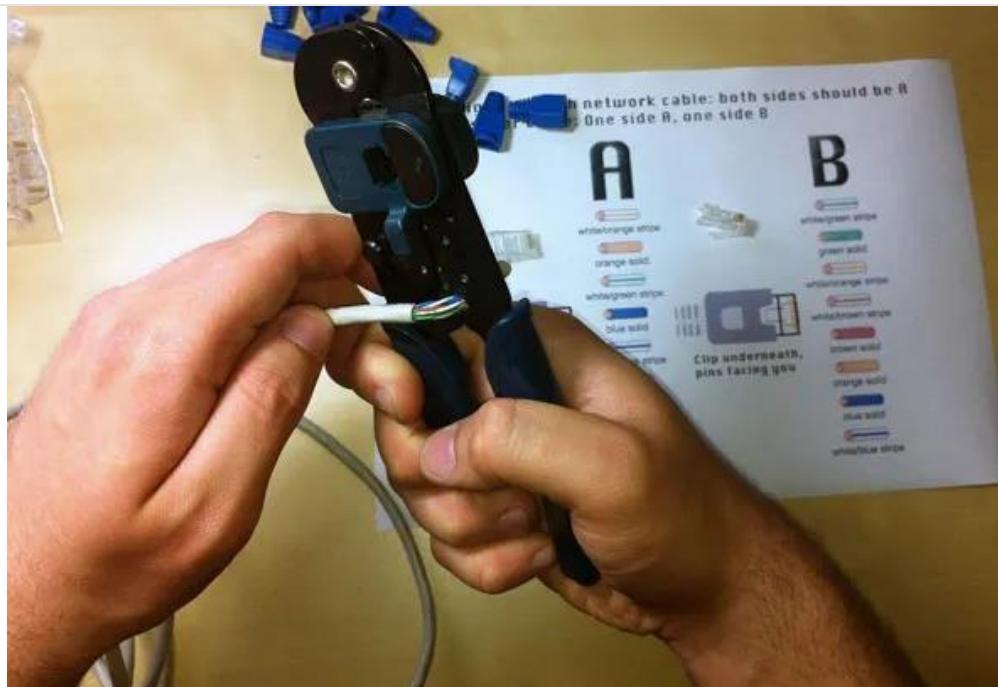


**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**


---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

**Step 3:** After, you will need to untangle the wires; there should be four “twisted pairs.” Referencing back to the sheet, arrange them from top to bottom. One end should be in arrangement A and the other in B.

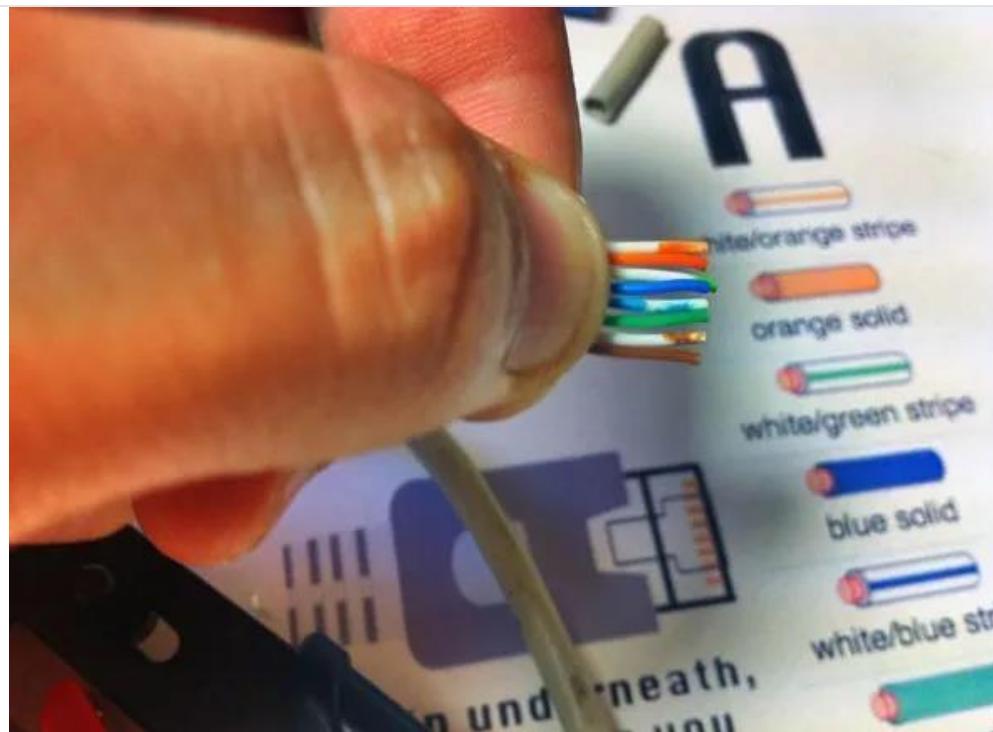

**Step 4:** Once the order is correct, bunch them together in a line, and if there are any that stick out farther than others, snip them back to create an even level. The difficult aspect is placing these into the RJ45 plug without messing up the order. To do so, hold the plug with the clip side facing away from you and have the gold pins facing toward you, as shown.

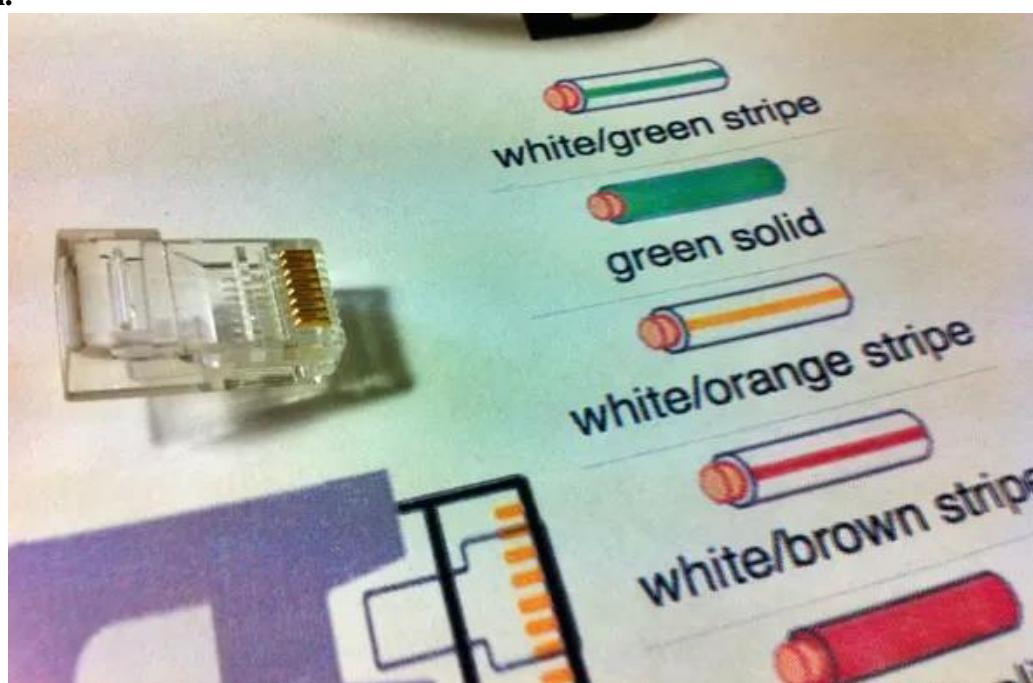


## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

**Step 5:** Next, push the cable right in. The notch at the end of the plug needs to be just over the cable shielding, and if it isn't, that means that you stripped off too much shielding. Simply snip the cables back a little more.

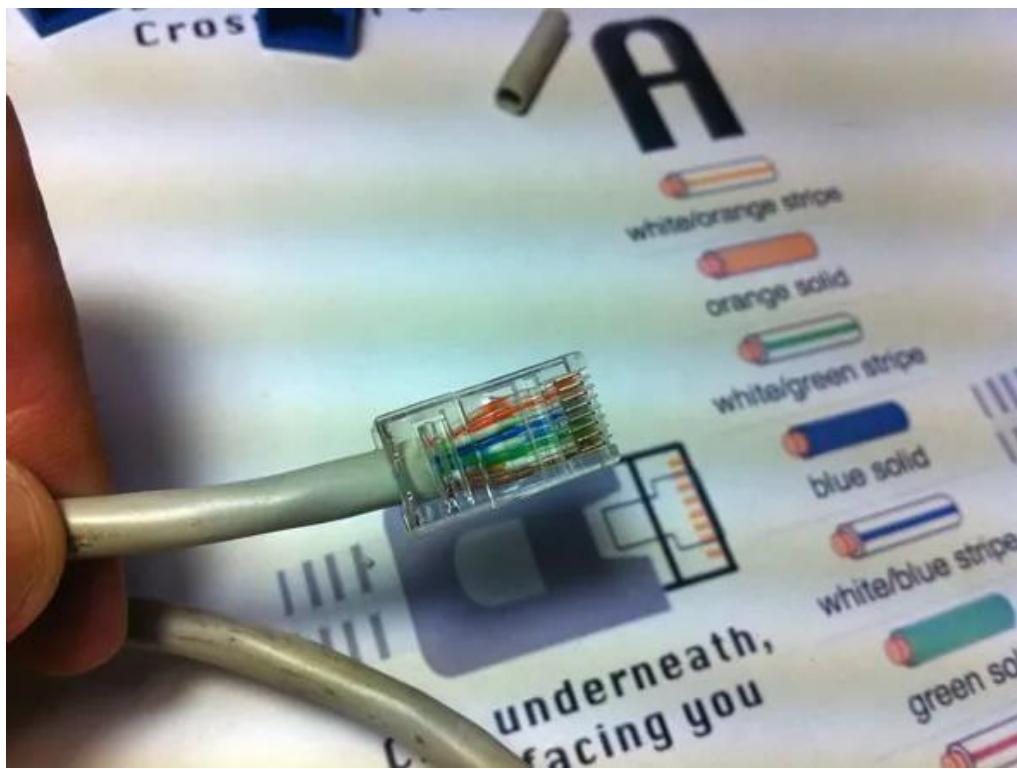

**Step 6:** After the wires are securely sitting inside the plug, insert it into the crimping tool and push down.

It should be shaped correctly, but pushing too hard can crack the fragile plastic plug.

**Step 7:** Lastly, repeat for the other end using diagram B (to make a crossover cables)/ using diagram A (to make a straight through cable)

To test it, plug it in and attempt to connect two devices directly.

### **Student observation:-**

1. What is the difference between cross cable and straight cable?
2. Which type of cable is used to connect two PC?(straight/Cross cable)
3. Which type cable is used to connect a router/switch to your PC? (straight/Cross cable)
4. Find out the category of twisted pair cable used in your la to connect the PC to the network socket.
5. Write down your understanding, challenges faced and output received

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

while making a twisted pair cross/straight cable.

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Practical -3**

### **AIM: To study the Packet tracer tool Installation and User Interface Overview**

- c) **To understand environment of CISCO PACKET TRACER to design simple network.**

#### **INTRODUCTION:**

A simulator, as the name suggests, simulates network devices and its environment. Packet Tracer is an exciting network design, simulation and modelling tool.

1. It allows you to model complex systems without the need for dedicated equipment.
2. It helps you to practice your network configuration and troubleshooting skills via computer or an Android or iOS based mobile device.
3. It is available for both the Linux and Windows desktop environments.
4. Protocols in Packet Tracer are coded to work and behave in the same way as they would on real hardware.

#### **INSTALLING PACKET TRACER:**

To download Packet Tracer, go to <https://www.netacad.com> and log in with your Cisco Networking Academy credentials; then, click on the Packet Tracer graphic and download the package appropriate for your operating system. (Can be used to download in your laptop).

##### Windows

Installation in Windows is pretty simple and straightforward; the setup comes in a single file named Packettracer\_Setup6.0.1.exe. Open this file to begin the setup wizard, accept the license agreement, choose a location, and start the installation.

##### Linux

Linux users with an Ubuntu/Debian distribution should download the file for Ubuntu, and those using Fedora/Redhat/CentOS must download the file for Fedora. Grant executable permission to this file by using chmod, and execute it to begin the installation.

```
chmod +x PacketTracer601_i386_installer-rpm.bin  
./PacketTracer601_i386_installer-rpm.bin
```


## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

## USER INTERFACE OVERVIEW:

The layout of Packet Tracer is divided into several components. The components of the Packet Tracer interface are as follows: match the numbering with explanations.

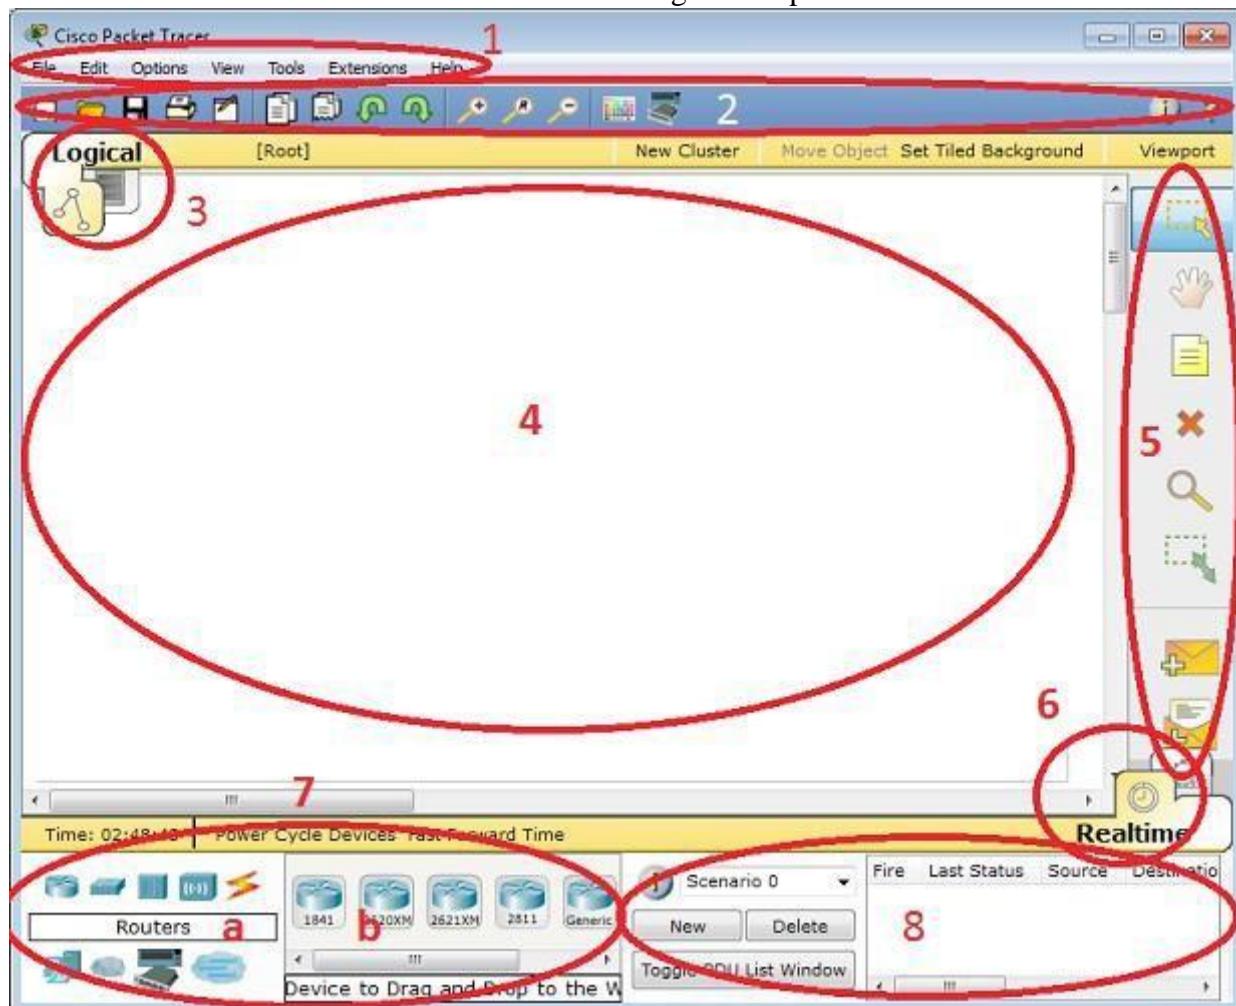

1. Menu bar – This is a common menu found in all software applications; it is used to open, save, print, change preferences, and so on.
2. Main toolbar – This bar provides shortcut icons to menu options that are commonly accessed, such as open, save, zoom, undo, and redo, and on the right-hand side is an icon for entering network information for the current network.
3. Logical/Physical workspace tabs – These tabs allow you to toggle between the Logical and Physical work areas.
4. Workspace – This is the area where topologies are created and simulations are displayed.
5. Common tools bar – This toolbar provides controls for manipulating topologies, such as select, move layout, place note, delete, inspect, resize shape, and add simple/complex PDU.
6. Real-time/Simulation tabs – These tabs are used to toggle between the real and simulation modes. Buttons are also provided to control the time, and to capture the packets.
7. Network component box – This component contains all of the network and end devices available with Packet Tracer, and is further divided into two areas:
  - Area 7a: Device-type selection box – This area contains device categories
  - Area 7b: Device-specific selection box – When a device category is selected, this selection box displays the different device models within that category

## **CS19541-COMPUTER NETWORKS-LAB RECORD**


---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

8. User-created packet box – Users can create highly-customized packets to test their topology from this area, and the results are displayed as a list.

### **d) Analyse the behaviour of network devices using CISCO PACKET TRACER simulator.**

1. From the network component box, click and drag-and-drop the below components:
  - a. 4 Generic PCs and One HUB
  - b. 4 Generic PCs and One switch
2. Click on Connections:
  - a. Click on Copper Straight-Through cable,
  - b. Select one of the PC and connect it to HUB using the cable. The link LED should glow in green, indicating that the link is up. Similarly connect remaining 3 PCs to the HUB.
  - c. Similarly connect 4 PCs to the switch using copper straight-through cable.

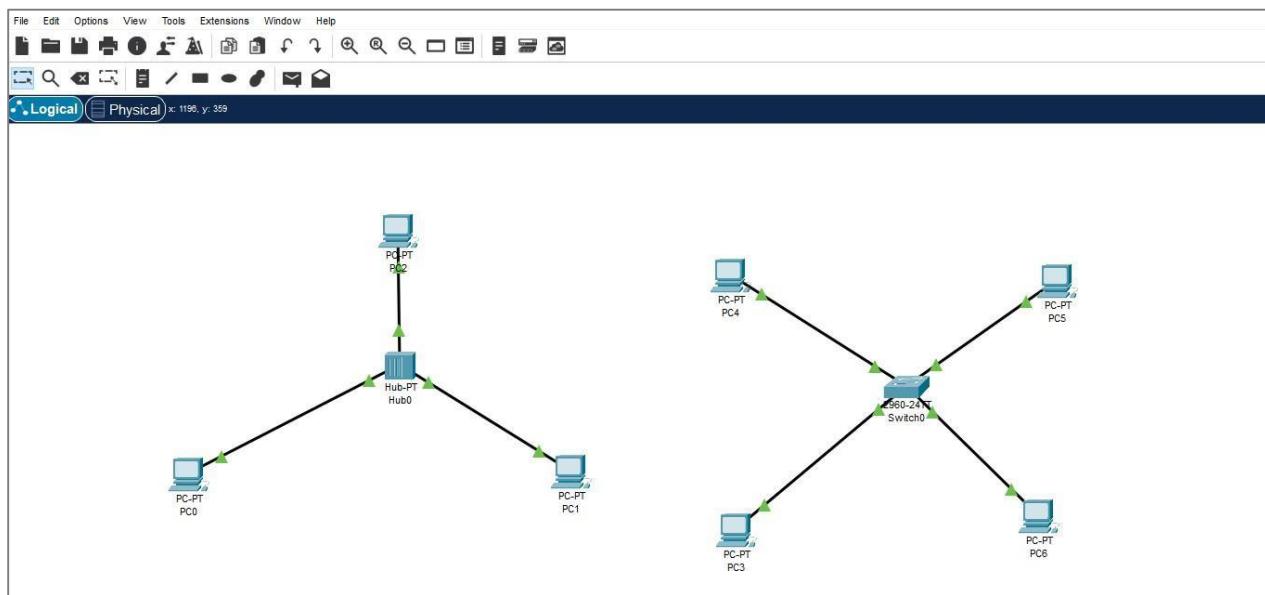


## **CS19541-COMPUTER NETWORKS-LAB**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

3. Click on the PCs connected to hub, go to the Desktop tab, click on IP Configuration, and enter an IP address and subnet mask. Here, the default gateway and DNS server information is not needed as there are only two end devices in the network.

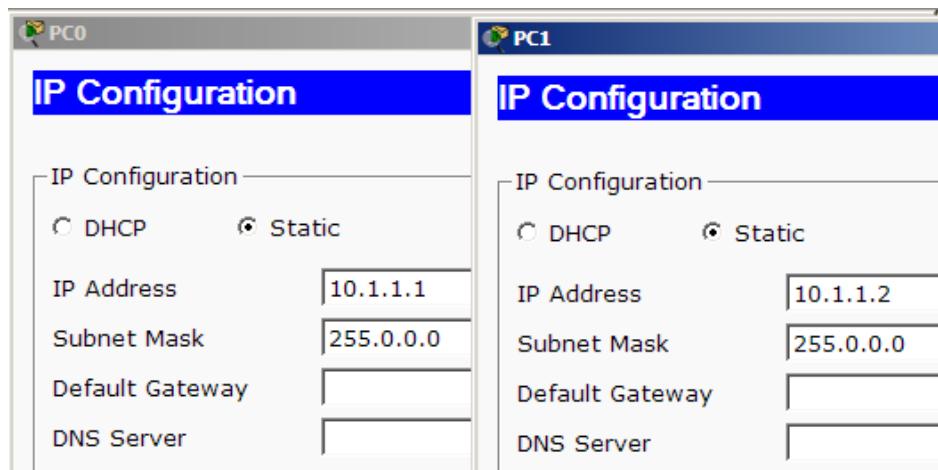

Click on the PDU (message icon) from the common tool bar,

- a. Drag and drop it on one of PC (source machine) and then drop it on another PC (destination machine) connected to the HUB.
4. Observe the flow of PDU from source PC to destination PC by selecting the Realtime mode of simulation.
5. Repeat step #3 to step #5 for the PCs connected to the switch.
6. Observe how HUB and switch are forwarding the PDU and write your observation and conclusion about the behaviors of Switch and HUB.

---

### **Student observation:**

- a. From your observation write down the behavior of Switch and HUB in terms of forwarding the packets received by them.
- b. Find out the network topology implemented in your college and draw and label that topology in your observation book.

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Practical -4**

**AIM: Setup and configure a LAN (Local area network) using a Switch and Ethernet cables in your lab.**

### **What is a LAN?**

A Local Area Network (LAN) refers to a network that connects devices within a limited area, such as an office building, school, or home. It enables users to share resources, including data, printers, and internet access. LAN connects devices to promote collaboration and transfer information between users, such as computers, printers, servers, and switches. A local area network (LAN) switch serves as the primary connecting device, managing and directing communications within the local network. Each connected device on a LAN switch can communicate directly with each other, allowing for fast and secure data transfer.

### **How to set up a LAN**

Step 1. Plan and Design an appropriate network topology taking into account network requirements and equipment location.

Step 2. You can take 4 Computers, a Switch with 8, 16, or 24 ports which is sufficient for networks of these sizes, and 4 Ethernet cables.

Step3: Connect your computers to network switch via an Ethernet cable, which is as simple as plugging one end of the Ethernet cable into your computer and the other end into your network switch.


Step4: Assign IP address to your PCs

1. Log on to the client computer as Administrator or as Owner.
2. Click Network and Internet Connections.
3. Right Click Local Area Connection/Ethernet->Go to Properties->Select Internet Protocol (TCP/IPv4)->Click on Properties->Select use the following ip address option and assign ipaddress.

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

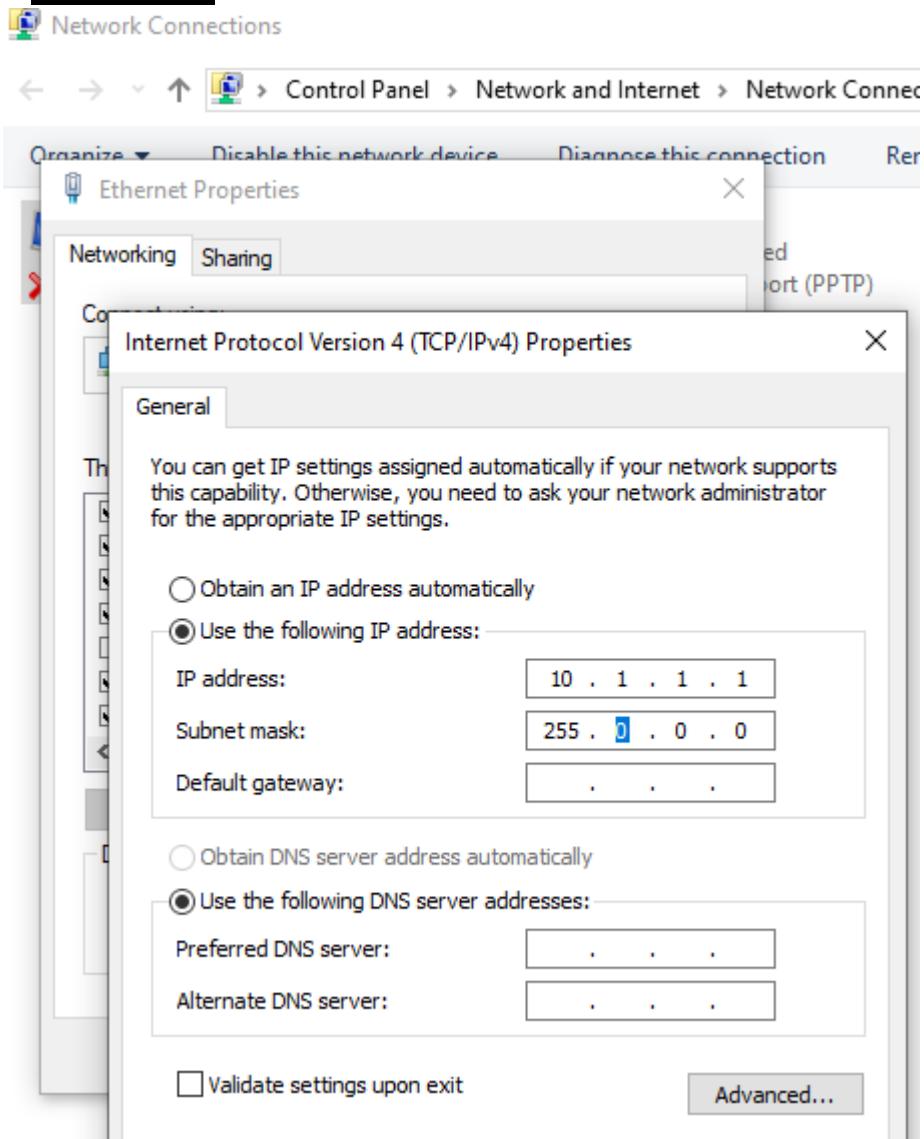

Similarly assign IP address to all the PCs connected to switch.

PC1-IP address: 10.1.1.1, subnet mask 255.0.0.0

PC2-IP address-10.1.1.2, subnet mask 255.0.0.0

PC3-IP address 10.1.1.3, subnet mask 255.0.0.0.

PC4-IP address 10.1.1.4, subnet mask 255.0.0.0.

Step 5:- Configure a network switch:

1. Connect your computer to the switch: To access the switch's web interface, you will need to connect your computer to the switch using an Ethernet cable.
2. Log in to the web interface: Open a web browser and enter the IP address of the switch in the address bar. This should bring up the login page for the switch's web interface. Enter the username and password to log in.
3. Configure basic settings: Once you're logged in, you will be able to configure basic settings for the switch,
4. Assign IP address as: 10.1.1.5, subnet mask 255.0.0.0.

Step 6:- Check the connectivity between switch and other machine by using ping command in the command prompt of the device.

## **CS19541-COMPUTER NETWORKS-LAB**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

Step 7: Select a folder, ->go to properties-> click Sharing tab->share it with everyone on the same LAN.

Step 8. Try to access the shared folder from others Computers of the network.

### **Student observation:**

**Draw a neat diagram of the LAN in the configuration observation book. that you have implemented in your lab. Write the ip configuration of each and every device. Write the outcome and challenges faced while configuring the LAN.**

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Practical-5**


### **AIM Experiments on Packet capture tool: Wireshark**

#### **Packet Sniffer**

- Sniffs messages being sent/received from/by your computer
- Store and display the contents of the various protocol fields in the messages
- Passive program
  - never sends packets itself
  - no packets addressed to it
  - receives a copy of all packets (sent/received)

#### **Packet Sniffer Structure Diagnostic Tools**

- Tcpdump
  - E.g. tcpdump -enx host 10.129.41.2 -w exe3.out
- Wireshark
  - wireshark -r exe3.out

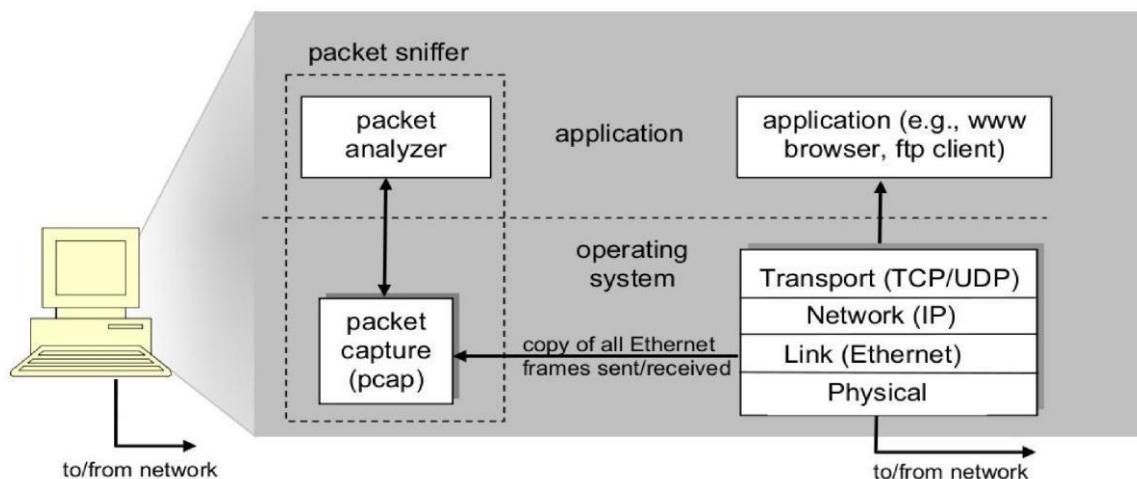

**Figure 1: Packet sniffer structure**

## **CS19541-COMPUTER NETWORKS-LAB**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **DESCRIPTION:**

### **WIRESHARK**

Wireshark, a network analysis tool formerly known as Ethereal, captures packets in real time and display them in human-readable format. Wireshark includes filters, color coding, and other features that let you dig deep into network traffic and inspect individual packets. You can use Wireshark to inspect a suspicious program's network traffic, analyze the traffic flow on your network, or troubleshoot network problems.

#### **What we can do with Wireshark:**

- Capture network traffic
- Decode packet protocols using dissectors
- Define filters – capture and display
- Watch smart statistics
- Analyze problems
- Interactively browse that traffic

#### **Wireshark used for:**


- Network administrators: troubleshoot network problems
- Network security engineers: examine security problems
- Developers: debug protocol implementations
- People: learn **network protocol internals**

## **Getting Wireshark**

Wireshark can be downloaded for Windows or macOS from [its official website](#). For Linux or another UNIX-like system, Wireshark will be found in its package repositories. For Ubuntu, Wireshark will be found in the Ubuntu Software Center.

## **Capturing Packets**

After downloading and installing Wireshark, launch it and double-click the name of a network interface under Capture to start capturing packets on that interface

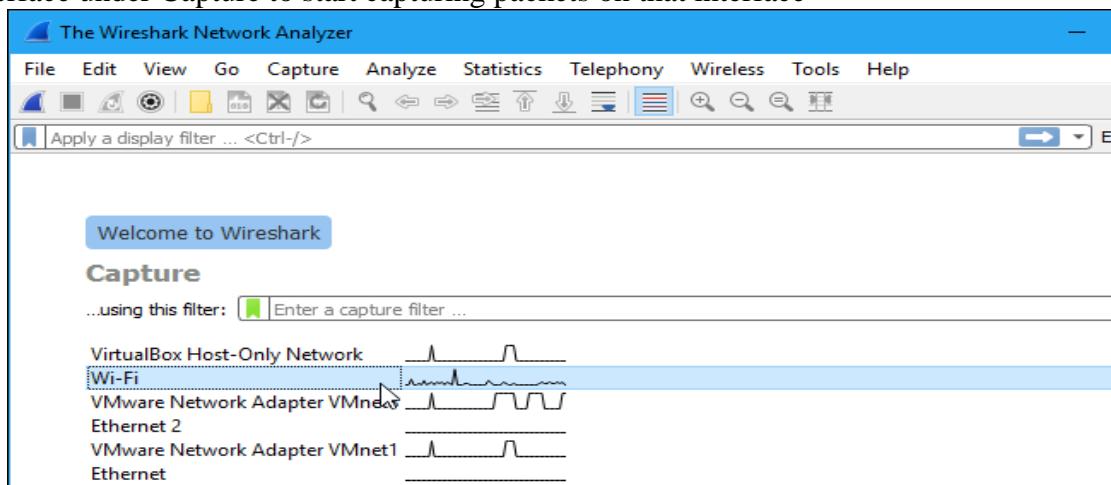


As soon as you click the interface's name, you'll see the packets start to appear in real time. Wireshark captures each packet sent to or from your system.

If you have promiscuous mode enabled—it's enabled by default—you'll also see all the other packets on the network instead of only packets addressed to your network adapter. To check if promiscuous mode is enabled, click Capture > Options and verify the "Enable promiscuous mode on all interfaces" checkbox is activated at the bottom of this window.

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

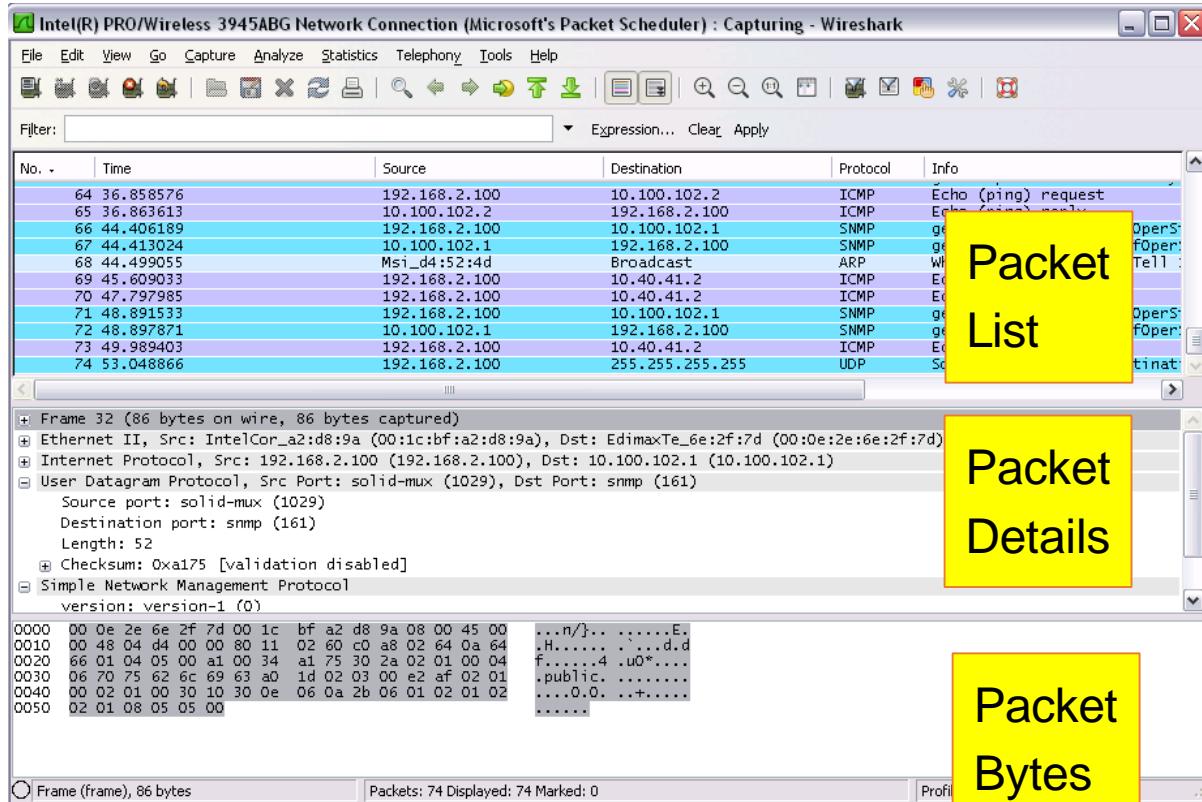

Click the red “Stop” button near the top left corner of the window when you want to stop capturing traffic.

## **The “Packet List” Pane**

The packet list pane displays all the packets in the current capture file. The “Packet List” pane Each line in the packet list corresponds to one packet in the capture file. If you select a line in this pane, more details will be displayed in the “Packet Details” and “Packet Bytes” panes.

## **The “Packet Details” Pane**

The packet details pane shows the current packet (selected in the “Packet List” pane) in a more detailed form. This pane shows the protocols and protocol fields of the packet selected in the “Packet List” pane. The protocols and fields of the packet shown in a tree which can be expanded and collapsed.

## **The “Packet Bytes” Pane**

The packet bytes pane shows the data of the current packet (selected in the “Packet List” pane) in a hexdump style.

## **Color Coding**


You’ll probably see packets highlighted in a variety of different colors. Wireshark uses colors to help you identify the types of traffic at a glance. By default, light purple is TCP traffic, light blue is UDP traffic, and black identifies packets with errors—for example, they could have been delivered out of order.

To view exactly what the color codes mean, click View > Coloring Rules. You can also customize and modify the coloring rules from here, if you like.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---


# CS19541-COMPUTER NETWORKS-LAB RECORD

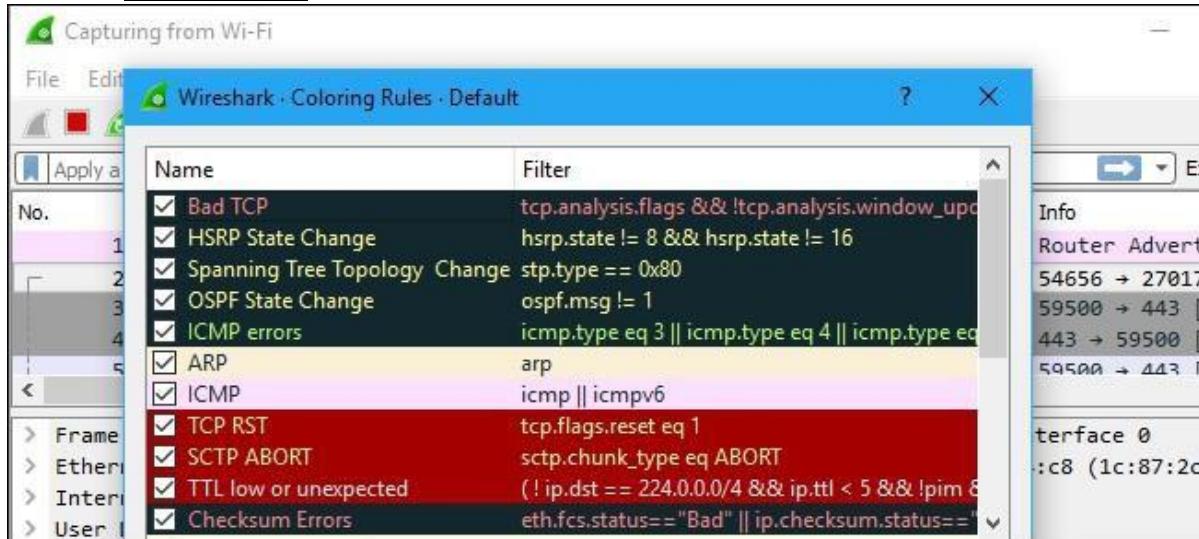

## Sample Captures

If there's nothing interesting on your own network to inspect, Wireshark's wiki has you covered. The wiki contains a [page of sample capture files](#) that you can load and inspect. Click File > Open in Wireshark and browse for your downloaded file to open one.

You can also save your own captures in Wireshark and open them later. Click File > Save to save your captured packets.

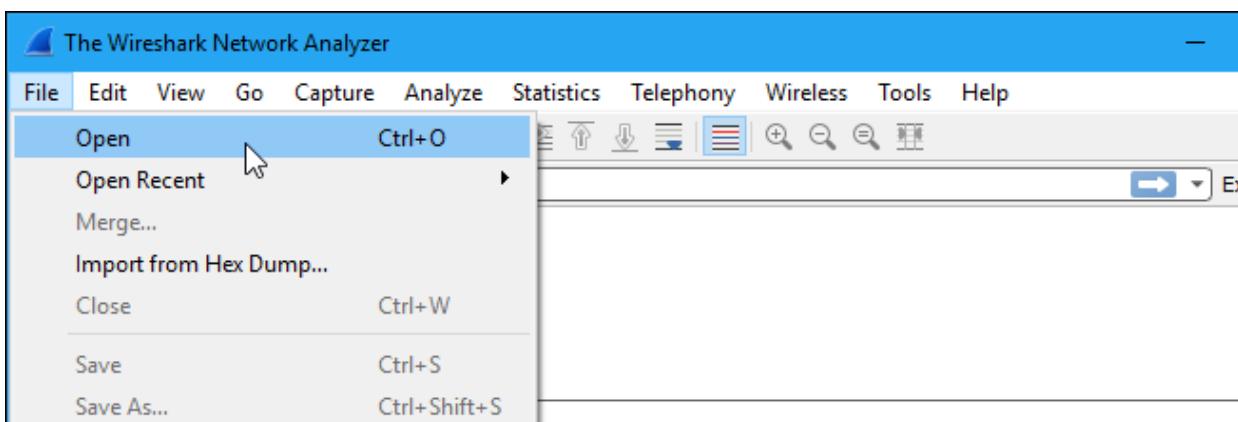

## Filtering Packets


If you're trying to inspect something specific, such as the traffic a program sends when phoning home, it helps to close down all other applications using the network so you can narrow down the traffic. Still, you'll likely have a large amount of packets to sift through. That's where Wireshark's filters come in.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---


## **CS19541-COMPUTER NETWORKS-LAB RECORD**

The most basic way to apply a filter is by typing it into the filter box at the top of the window and clicking Apply (or pressing Enter). For example, type “dns” and you’ll see only DNS packets. When you start typing, Wireshark will help you autocomplete your filter.

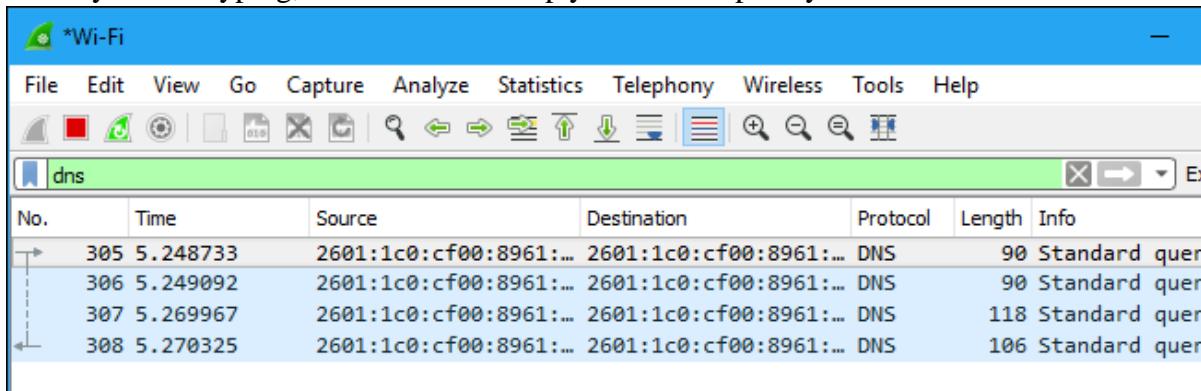

You can also click Analyze > Display Filters to choose a filter from among the default filters included in Wireshark. From here, you can add your own custom filters and save them to easily access them in the future.

For more information on Wireshark’s display filtering language, read the [Building display filter expressions](#) page in the official Wireshark documentation.

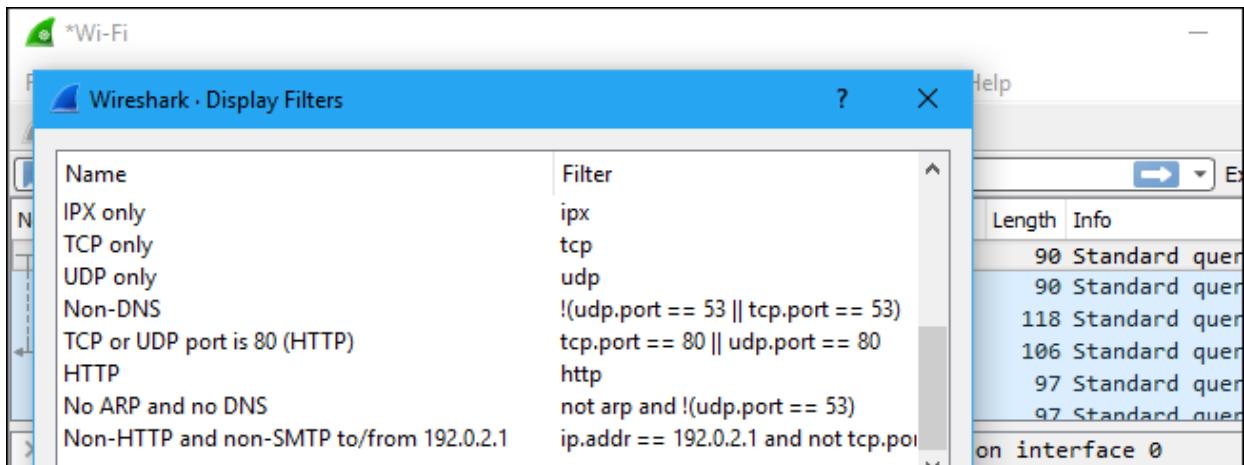


Another interesting thing you can do is right-click a packet and select Follow > TCP Stream. You’ll see the full TCP conversation between the client and the server. You can also click other protocols in the Follow menu to see the full conversations for other protocols, if applicable.

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

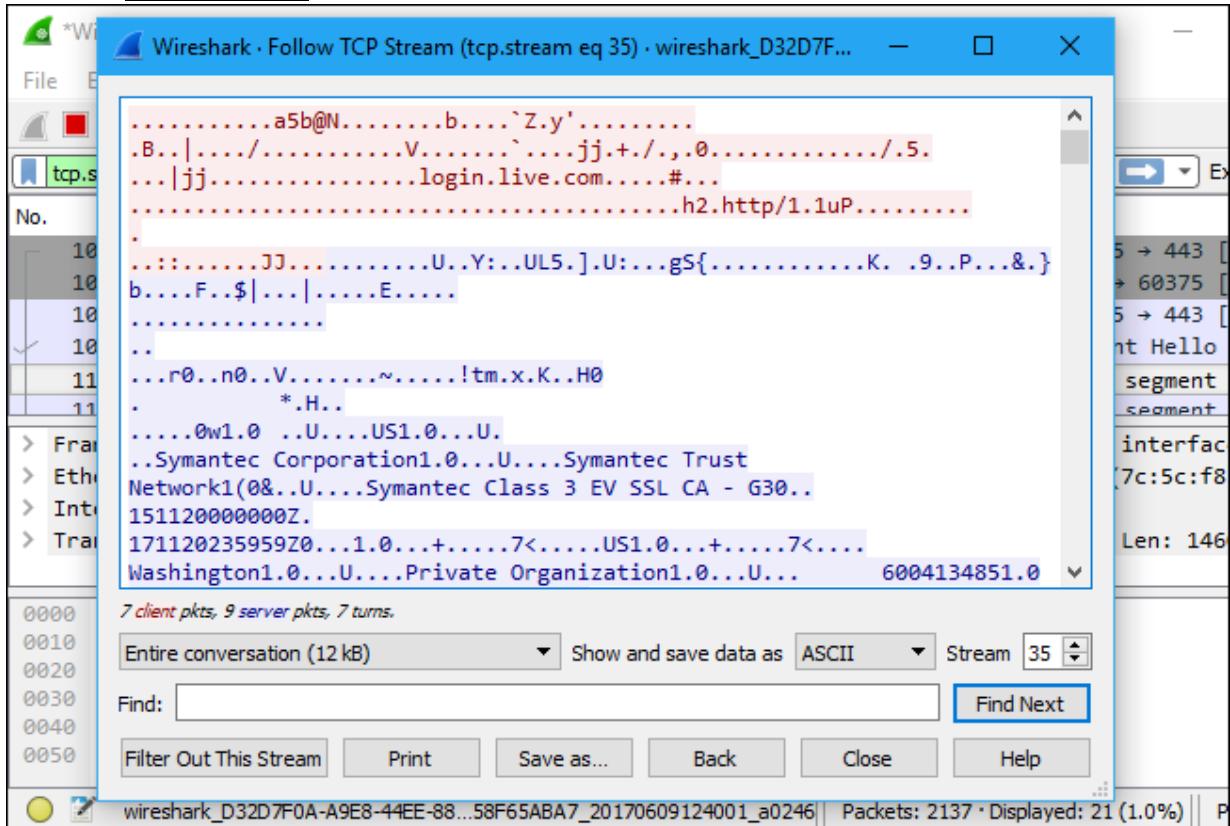

Close the window and you'll find a filter has been applied automatically. Wireshark is showing you the packets that make up the conversation.

No.	Time	Source	Destination	Protocol	Length	Info
1054	2.798483	192.168.29.250	131.253.61.66	TCP	66	60375 → 443 [Frame 1054: 66 bytes on wire (464 bits), 66 bytes captured (464 bits) on interface 0]
1078	2.891263	131.253.61.66	192.168.29.250	TCP	58	443 → 60375 [Frame 1078: 58 bytes on wire (464 bits), 58 bytes captured (464 bits) on interface 0]
1079	2.891359	192.168.29.250	131.253.61.66	TCP	54	60375 → 443 [Frame 1079: 54 bytes on wire (464 bits), 54 bytes captured (464 bits) on interface 0]
1080	2.891527	192.168.29.250	131.253.61.66	TLSv1.2	288	Client Hello [Frame 1080: 288 bytes on wire (2384 bits), 288 bytes captured (2384 bits) on interface 0]
1103	2.992980	131.253.61.66	192.168.29.250	TCP	1514	[TCP segment of a connection from 131.253.61.66 (SYN) to 192.168.29.250 (SYN-ACK)] [Frame 1103: 1514 bytes on wire (12112 bits), 1514 bytes captured (12112 bits) on interface 0]
1104	2.992980	131.253.61.66	192.168.29.250	TCP	1514	[TCP segment of a connection from 131.253.61.66 (SYN-ACK) to 192.168.29.250 (SYN-ACK)] [Frame 1104: 1514 bytes on wire (12112 bits), 1514 bytes captured (12112 bits) on interface 0]

> Frame 1078: 58 bytes on wire (464 bits), 58 bytes captured (464 bits) on interface 0  
> Ethernet II, Src: AsustekC\_35:e4:c8 (1c:87:2c:35:e4:c8), Dst: IntelCor\_38:be:bd (7c:5c:f8)  
> Internet Protocol Version 4, Src: 131.253.61.66, Dst: 192.168.29.250  
> Transmission Control Protocol, Src Port: 443, Dst Port: 60375, Seq: 0, Ack: 1, Len: 0

## Inspecting Packets

Click a packet to select it and you can dig down to view its details.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

\*Wi-Fi

tcp.stream eq 35

No.	Time	Source	Destination	Protocol	Length	Info
1054	2.798483	192.168.29.250	131.253.61.66	TCP	66	60375 → 443
1078	2.891263	131.253.61.66	192.168.29.250	TCP	58	443 → 60375
1079	2.891359	192.168.29.250	131.253.61.66	TCP	54	60375 → 443
1080	2.891527	192.168.29.250	131.253.61.66	TLSv1.2	288	Client Hello

Frame 1054: 66 bytes on wire (528 bits), 66 bytes captured (528 bits) on interface 0  
 Interface id: 0 (\Device\NPF\_{D32D7F0A-A9E8-44EE-88DC-DFD58F65ABA7})  
 Encapsulation type: Ethernet (1)  
 Arrival Time: Jun 9, 2017 12:40:04.140141000 Pacific Daylight Time  
 [Time shift for this packet: 0.000000000 seconds]  
 Epoch Time: 1497037204.140141000 seconds

Hex	Dec	Text
0000	1c 87 2c 35 e4 c8 7c 5c	f8 38 be bd 08 00 45 00
0010	00 34 0b 5d 40 00 80 06	4f 85 c0 a8 1d fa 83 fd
0020	3d 42 eb d7 01 bb 22 52	7b 69 00 00 00 00 80 02
0030	fa f0 48 ef 00 00 02 04	05 b4 01 03 03 08 01 01
0040	04 02	..

Encapsulation type (frame.encap\_type) | Packets: 8136 · Displayed: 21 (0.3%)

You can also create filters from here — just right-click one of the details and use the Apply as Filter submenu to create a filter based on it.

\*Wi-Fi

tcp.stream eq 35

No.	Time	Source	Destination	Protocol	Length	Info
1054	2.798483	192.168.29.250	131.253.61.66	TCP	66	60375 → 443
1078	2.891263	131.253.61.66	192.168.29.250	TCP	58	443 → 60375
1079	2.891359	192.168.29.250	131.253.61.66	TCP	54	60375 → 443
1080	2.891527	192.168.29.250	131.253.61.66	TLSv1.2	288	Client Hello

Source Port: 60375

- Expand Subtrees Shift+Right
- Expand All Ctrl+Right
- Collapse All Ctrl+Left
- Apply as Column
- Apply as Filter
  - Selected
  - Not Selected
  - ...and Selected
  - ...or Selected
  - ...and not Selected
- Prepare a Filter
- Conversation Filter
- Colorize with Filter
- Follow

Packets: 8136 · Displayed: 21 (0.2%)

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

Wireshark is an extremely powerful tool, and this tutorial is just scratching the surface of what you can do with it. Professionals use it to debug network protocol implementations, examine security problems and inspect network protocol internals.

## Flow Graph: Gives a better understanding of what we see.

The image displays two windows of the Wireshark application. The top window, titled "Example 001.pcap - Wireshark", shows a list of captured frames and their details. A context menu is open over frame 6, which is highlighted in green. The menu path "Flow Graph..." is visible. The bottom window, titled "Example 001.pcap - Graph Analysis", shows a timeline of network events with nodes for hosts 192.168.2.100, 10.40.41.2, 212.150.49.10, and 212.143.162.141. The timeline shows various protocols like ICMP, DNS, and HTTP being exchanged between these hosts. A detailed list of comments for each event is provided on the right side of the timeline window.

Example 001.pcap - Wireshark

File Edit View Go Capture Analyze Statistics Telephony Tools Help

Filter:

No.	Time
1	0.000000
2	2.183304
3	3.430100
4	3.457181
5	3.461602
6	3.623867
7	3.728385
8	3.728429
9	3.728839
10	3.768896
11	3.770703
12	3.772411

Frame 5 (74 bytes on wire, 74 bytes captured) at 0.000000 (0.000000s ago) on wire (Intel(R) PRO/100 MT Desktop (Intel(R) Dual Band Wireless-AC 7265)) at interface Intel(R) PRO/100 MT Desktop (Intel(R) Dual Band Wireless-AC 7265) (PCI Express v2.0 x16, Intel(R) PRO/100 MT Desktop (Intel(R) Dual Band Wireless-AC 7265)) (eth0)

Internet Protocol Version 4, Src: 192.168.2.100 (192.168.2.100), Dst: 10.40.41.2 (10.40.41.2)

TCP, Src Port: 3866, Dst Port: 53

HTTP, GET /home/0.7340.L-8.00.html HTTP/1.1

HTTP/1.0 301 Moved Permanently

Content-Type: text/html; charset=UTF-8

Location: http://www.lenovo.com.edgekey.net/

Content-Length: 128480

Connection: keep-alive

Cache-Control: no-cache

Server: Apache

Content-Security-Policy: frame-ancestors 'self' https://www.lenovo.com https://www.lenovo.com.edgekey.net

Set-Cookie: JSESSIONID=110B8A8A8A8A8A8A8A8A8A8A8A8A8A8A; Path=/; HttpOnly

Example 001.pcap - Graph Analysis

Time	Source	Destination	Comment
0.000	192.168.2.100	10.40.41.2	ICMP: Echo (ping) request
2.183	10.40.41.2	192.168.2.100	ICMP: Echo (ping) request
3.430	192.168.2.100	212.150.49.10	Standard query A www.ynet.co.il.d4p.net CNAME a39.
3.457	212.150.49.10	192.168.2.100	Standard query response CNAME ynet.co.il.d4p.net CNAME a39.
3.462	192.168.2.100	212.143.162.141	Standard query A www.lenovo.com
3.624	212.143.162.141	192.168.2.100	TCP: dzdaemon > http [SYN] Seq=0 Win=65535 Len=0 MSS=1460 W
3.728	192.168.2.100	212.143.162.141	TCP: http > dzdaemon [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 M
3.728	212.143.162.141	192.168.2.100	TCP: dzdaemon > http [ACK] Seq=1 Ack=1 Win=128480 Len=0
3.729	192.168.2.100	212.143.162.141	HTTP: GET / HTTP/1.1
3.769	212.143.162.141	192.168.2.100	HTTP: http > dzdaemon [ACK]
3.771	192.168.2.100	212.143.162.141	HTTP/1.0 301 Moved
3.772	192.168.2.100	212.143.162.141	GET /home/0.7340.L-8.00.html HTTP/1.1
3.965	192.168.2.100	212.143.162.141	TCP: [TCP Previous segment lost] [TCP segment of a reassembled PDU]
3.965	212.143.162.141	192.168.2.100	TCP: [TCP Dup ACK 12#1] dzdaemon > http [ACK] Seq=1204 Ack=1
3.966	192.168.2.100	212.143.162.141	TCP: [TCP segment of a reassembled PDU]
3.966	212.143.162.141	192.168.2.100	TCP: [TCP Dup ACK 12#2] dzdaemon > http [ACK] Seq=1204 Ack=1
3.968	192.168.2.100	212.143.162.141	TCP: [TCP segment of a reassembled PDU]
3.968	212.143.162.141	192.168.2.100	TCP: [TCP Dup ACK 12#3] dzdaemon > http [ACK] Seq=1204 Ack=1
3.968	192.168.2.100	212.143.162.141	DNS: Standard query response CNAME www.lenovo.com.edgekey.net
3.990	212.143.162.141	192.168.2.100	TCP: [TCP segment of a reassembled PDU]

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB**

## **RECORD**

### **CAPTURING AND ANALYSING PACKETS USING WIRESHARK TOOL**

To filter, capture, view, packets in Wireshark Tool.

Capture 100 packets from the Ethernet: IEEE 802.3 LAN Interface and save it.

#### **Procedure**

- Select Local Area Connection in Wireshark.
- Go to capture → option
- Select stop capture automatically after 100 packets.
- Then click Start capture.
- Save the packets.

#### **Output**

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	Pegatron_e0:87:9e	Broadcast	ARP	60	Who has 172.16.9.94? Tell 172.16.9.138
2	0.000180	RealtekS_55:2c:b8	Broadcast	ARP	60	Who has 172.16.10.36? Tell 172.16.10.50
3	0.000294	RealtekS_55:2c:b8	Broadcast	ARP	60	Who has 172.16.11.36? Tell 172.16.10.50
4	0.000295	RealtekS_55:2c:b8	Broadcast	ARP	60	Who has 172.16.8.37? Tell 172.16.10.50
5	0.000296	RealtekS_55:2c:b8	Broadcast	ARP	60	Who has 172.16.9.37? Tell 172.16.10.50
6	0.000296	RealtekS_55:2c:b8	Broadcast	ARP	60	Who has 172.16.11.37? Tell 172.16.10.50
7	0.001460	fe80::4968:12a7:5e3...	ff02::1:3	LLMNR	95	Standard query 0xae2b A TLFL3-HDC101701
8	0.001622	172.16.8.95	224.0.0.252	LLMNR	75	Standard query 0xae2b A TLFL3-HDC101701
9	0.001623	172.16.8.95	224.0.0.252	LLMNR	75	Standard query 0x28c0 AAAA TLFL3-HDC101701
10	0.001625	fe80::4968:12a7:5e3...	ff02::1:3	LLMNR	95	Standard query 0x28c0 AAAA TLFL3-HDC101701
11	0.001651	fe80::4968:12a7:5e3...	ff02::1:3	LLMNR	95	Standard query 0xae271 A TLFL3-HDC081207
Frame 7: 95 bytes on wire (760 bits), 95 bytes captured (760 bits) on interface 0						
Ethernet II, Src: Dell_35:10:a8 (50:9a:4c:35:10:a8), Dst: IPv6mcast_01:00:03 (33:33:00:01:00:03)						
Internet Protocol Version 6, Src: fe80::4968:12a7:5e36:523e, Dst: ff02::1:3						
User Datagram Protocol, Src Port: 62374, Dst Port: 5355						
Source Port: 62374						
Destination Port: 5355						
Length: 41						
Checksum: 0x90e0 [unverified]						
[Checksum Status: Unverified]						
[Stream index: 0]						
Link-local Multicast Name Resolution (query)						
0000	33 33 00 01 00 03 50 9a	4c 35 10 a8 86 dd 60 00	33.....P L5.....			
0010	00 00 00 29 11 01 fe 80	00 00 00 00 00 00 49 68	... ) .....Ih			
0020	12 a7 5e 36 52 3e ff 02	00 00 00 00 00 00 00 00	... ^6R>.....			
0030	00 00 00 01 00 03 f3 a6	14 eb 00 29 90 e0 ae 2b	..... ) ...+			
0040	00 00 00 01 00 00 00 00	00 00 0f 54 4c 46 4c 33	..... .TLFL3			
0050	2d 48 44 43 31 30 31 37	30 31 00 00 01 00 01	-HDC1017 01....			

1. Create a Filter to display only TCP/UDP packets, inspect the packets and provide the flow graph

#### **Procedure**

- Select Local Area Connection in Wireshark.
- Go to capture → option
- Select stop capture automatically after 100 packets.
- Then click Start capture.
- Search TCP packets in search bar.
- To see flow graph click Statistics→Flow graph.
- Save the packets.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---


# CS19541-COMPUTER NETWORKS-LAB RECORD

No.	Time	Source	Destination	Protocol	Length	Info
123	4.557832	fe80::8532:3a9f:aff:fe80::5c2b:19eb:d33...	TCP	74	1509 → 2869 [RST, ACK] Seq=1 Ack=1 Win=0 Len=0	
126	4.557993	172.16.9.186	172.16.9.96	TCP	60	1506 → 2869 [RST, ACK] Seq=1 Ack=1 Win=0 Len=0
1095	30.718732	172.16.8.83	172.16.9.96	TCP	66	51526 → 2869 [SYN, ECN, CWR] Seq=0 Win=8192 Len=0 MSS=1460 WS=256 SACK_PERM=1
1096	30.718794	172.16.9.96	172.16.8.83	TCP	66	2869 → 51526 [SYN, ACK] Seq=0 Ack=1 Win=8192 Len=0 MSS=1460 WS=256 SACK_PERM=1
1097	30.719129	172.16.8.83	172.16.9.96	TCP	60	51526 → 2869 [ACK] Seq=1 Ack=1 Win=65536 Len=0
1099	30.719199	172.16.9.96	172.16.8.83	TCP	278	2869 → 51526 [PSH, ACK] Seq=1 Ack=133 Win=65536 Len=224 [TCP segment of a reassembled PDU]
1100	30.719986	172.16.9.96	172.16.8.83	TCP	1514	2869 → 51526 [ACK] Seq=225 Ack=133 Win=65536 Len=1460 [TCP segment of a reassembled PDU]
1101	30.720279	172.16.8.83	172.16.9.96	TCP	60	51526 → 2869 [ACK] Seq=133 Ack=1685 Win=65536 Len=0
1102	30.720002	172.16.9.96	172.16.8.83	TCP	278	2869 → 51526 [PSH, ACK] Seq=133 Ack=1685 Win=65536 Len=224

Frame 123: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface 0  
 ▷ Ethernet II, Src: Realtek\_5\_b2:60:90 (00:e0:4c:b2:60:90), Dst: IntelCor\_13:ed:7c (00:27:0e:13:ed:7c)  
 ▷ Internet Protocol Version 6, Src: fe80::8532:3a9f:aff1:b3ca, Dst: fe80::5c2b:19eb:d33d:alcd  
 ▷ Transmission Control Protocol, Src Port: 1509, Dst Port: 2869, Seq: 1, Ack: 1, Len: 0

```
0000  00 27 0e 13 ed 7c 00 e9 4c b2 60 90 86 dd 60 00 :...|...L...~.
0010  00 00 00 14 06 80 fe 80 00 00 00 00 00 00 85 32 .....2
0020  3a 9f af f1 b3 ca fe 80 00 00 00 00 00 5c 2b :....+.../\+
0030  19 eb d3 d3 a1 cd 05 e5 0b 35 3b ef f1 2f bf d2 .....5j.../..
0040  67 35 50 14 00 00 3e de 00 00 g5P >> ...
```

## Flow Graph

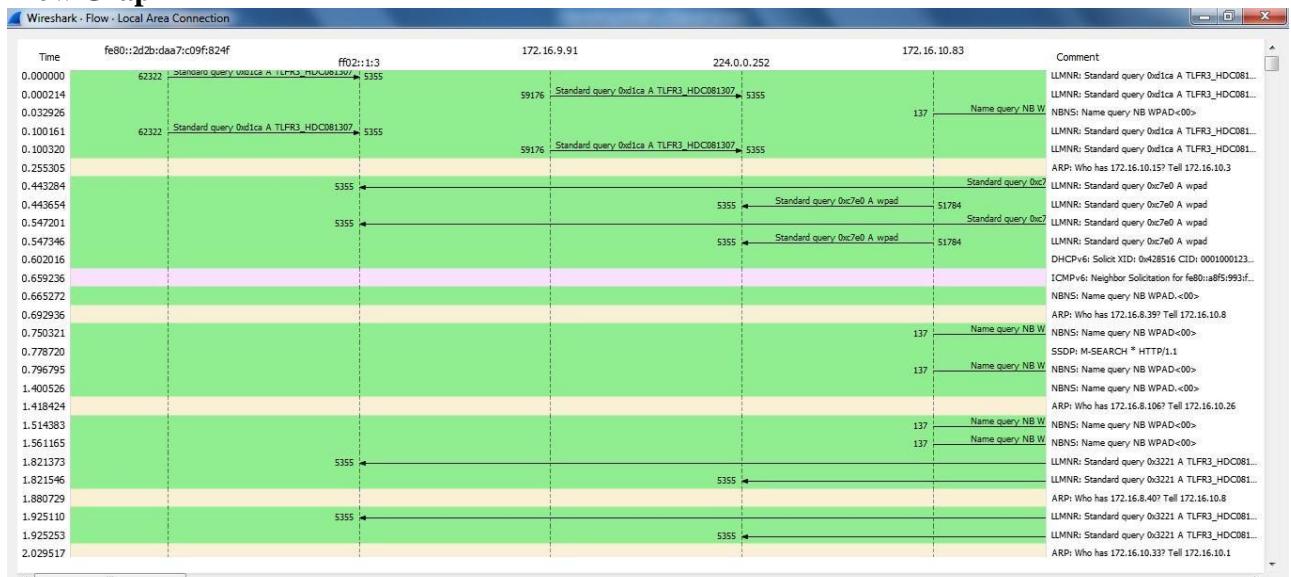

## 2. Create a Filter to display only ARP packets and inspect the packets.

### Procedure

- Go to capture → option
- Select stop capture automatically after 100 packets.
- Then click Start capture.
- Search ARP packets in search bar.
- Save the packets.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

## Output

Wireshark Screenshot showing ARP traffic:

Frame 119: 42 bytes on wire (336 bits), 42 bytes captured (336 bits) on interface 0

Ethernet II, Src: IntelCor\_13:ed:7c (00:27:0e:13:ed:7c), Dst: RealtekS\_b2:60:90 (00:e0:4c:b2:60:90)

Address Resolution Protocol (reply)

No.	Time	Source	Destination	Protocol	Length	Info
6	0.255305	Foxconn_c9:c5:f0	Broadcast	ARP	60	Who has 172.16.10.15? Tell 172.16.10.3
14	0.692936	Foxconn_d0:ac:46	Broadcast	ARP	60	Who has 172.16.8.39? Tell 172.16.10.8
19	1.418424	Foxconn_c9:c9:91	Broadcast	ARP	60	Who has 172.16.8.106? Tell 172.16.10.26
24	1.880729	Foxconn_d0:ac:46	Broadcast	ARP	60	Who has 172.16.8.40? Tell 172.16.10.8
27	2.029517	Giga-Byt_92:d2:ef	Broadcast	ARP	60	Who has 172.16.10.33? Tell 172.16.10.1
41	2.509905	Giga-Byt_7c:c5:34	Broadcast	ARP	60	Who has 172.16.9.82? Tell 172.16.9.111
44	2.602358	Foxconn_c9:c8:24	Broadcast	ARP	60	Who has 172.16.8.139? Tell 172.16.10.22
46	2.743021	Dell_35:11:11	Broadcast	ARP	60	Who has 172.16.8.118? Tell 172.16.10.195
56	3.201822	Giga-Byt_92:d2:ef	Broadcast	ARP	60	Who has 172.16.10.34? Tell 172.16.10.1
60	3.237061	Giga-Byt_7c:c5:34	Broadcast	ARP	60	Who has 172.16.9.82? Tell 172.16.9.111
71	3.478062	Dell_35:11:11	Broadcast	ARP	60	Who has 172.16.8.119? Tell 172.16.10.105

Hex dump of selected frame:

```

0000  00 e0 4c b2 60 90 00 27  0e 13 ed 7c 08 06 00 01  ..L`...`....|....
0010  08 00 06 04 00 02 00 27  0e 13 ed 7c ac 10 09 60  .....`....|.....
0020  00 e0 4c b2 60 90 ac 10  09 6a  ..L`....`j

```

### 3. Create a Filter to display only DNS packets and provide the flow graph.

#### Procedure

- Go to capture → option
- Select stop capture automatically after 100 packets.
- Then click Start capture.
- Search DNS packets in search bar.
- To see flow graph click Statistics→Flow graph.
- Save the packets.

Wireshark Screenshot showing DNS traffic:

Frame 989: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface 0

Ethernet II, Src: IntelCor\_13:ed:7c (00:27:0e:13:ed:7c), Dst: Caswell\_f2:b4:a1 (00:35:71:f2:b4:a1)

Internet Protocol Version 4, Src: 172.16.9.96, Dst: 172.16.8.1

User Datagram Protocol, Src Port: 62278, Dst Port: 53

Domain Name System (query)

No.	Time	Source	Destination	Protocol	Length	Info
989	32.977988	172.16.9.96	172.16.8.1	DNS	74	Standard query 0x9e40 A www.google.com
1000	32.977994	172.16.9.96	172.16.8.1	DNS	74	Standard query 0xb5b0 A www.google.com A 172.217.163.132
1199	37.273599	172.16.9.96	172.16.8.1	DNS	79	Standard query 0xb5b A accounts.google.com
1200	37.273822	172.16.9.96	172.16.8.1	DNS	75	Standard query 0x6aff A ssl.gstatic.com
1201	37.273837	172.16.9.96	172.16.8.1	DNS	95	Standard query response 0xb5b0 A accounts.google.com A 172.217.163.141
1202	37.273878	172.16.9.96	172.16.8.1	DNS	93	Standard query response 0xb5b0 A ssl.gstatic.com A 172.217.163.141
1203	37.274368	172.16.9.96	172.16.8.1	DNS	77	Standard query response 0x76f0 A fonts.gstatic.com
1204	37.274541	172.16.9.96	172.16.8.1	DNS	129	Standard query response 0x76d0 A fonts.gstatic.com CNAME gstaticadssl1.google.com A 172.217.160.131
1738	38.875063	172.16.9.96	172.16.8.1	DNS	80	Standard query 0x7a60 A accounts.youtube.com
1739	38.875294	172.16.9.96	172.16.9.96	DNS	124	Standard query response 0x7a60 A accounts.youtube.com CNAME www3.1.google.com A 172.217.167.142

Hex dump of selected frame:

```


0000  08 35 71 f2 b4 a1 00 27  0e 13 ed 7c 08 00 45 00  5q`....`|-.E.
0010  00 3c 37 bb 00 00 88 11  09 08 ac 10 09 60 ac 10  <7`....`.....
0020  00 01 f3 46 00 35 08 28  69 bb 9e 40 01 00 00 01  ...F`5`(`@`-.
0030  00 00 00 00 00 00 00 01  77 27 08 67 6f 6f 67 6c  ...w`ww googl
0040  05 03 03 00 fd 00 00 01  00 01  e.com

```

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---


# CS19541-COMPUTER NETWORKS-LAB RECORD

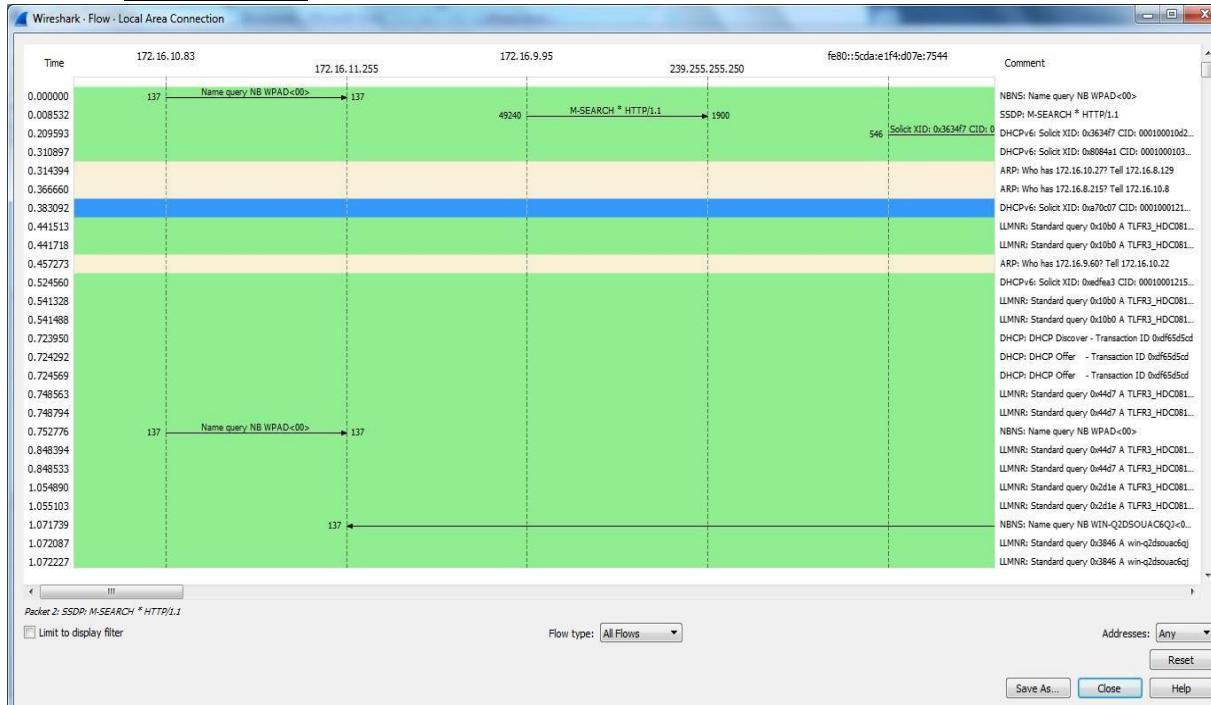

## 4. Create a Filter to display only HTTP packets and inspect the packets

**Procedure**

- Select Local Area Connection in Wireshark.
- Go to capture → option
- Select stop capture automatically after 100 packets.
- Then click Start capture.
- Search HTTP packets in search bar.
- Save the packets.

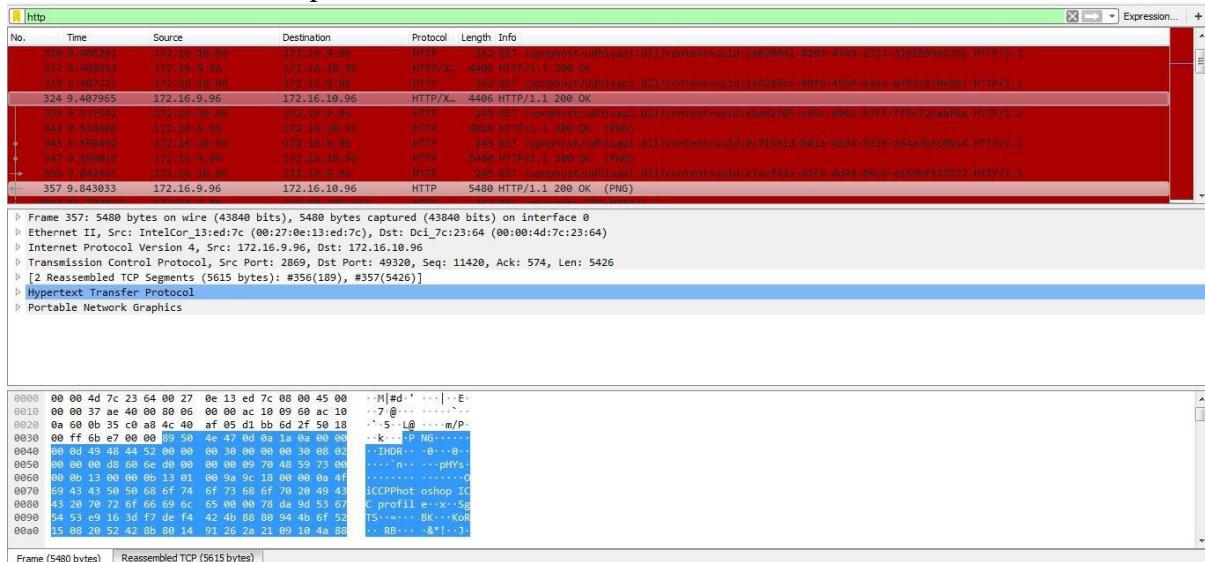

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**


---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## 5. Create a Filter to display only IP/ICMP packets and inspect the packets.

### Procedure

- Select Local Area Connection in Wireshark.
- Go to capture → option
- Select stop capture automatically after 100 packets.
- Then click Start capture.
- Search ICMP/IP packets in search bar.
- Save the packets

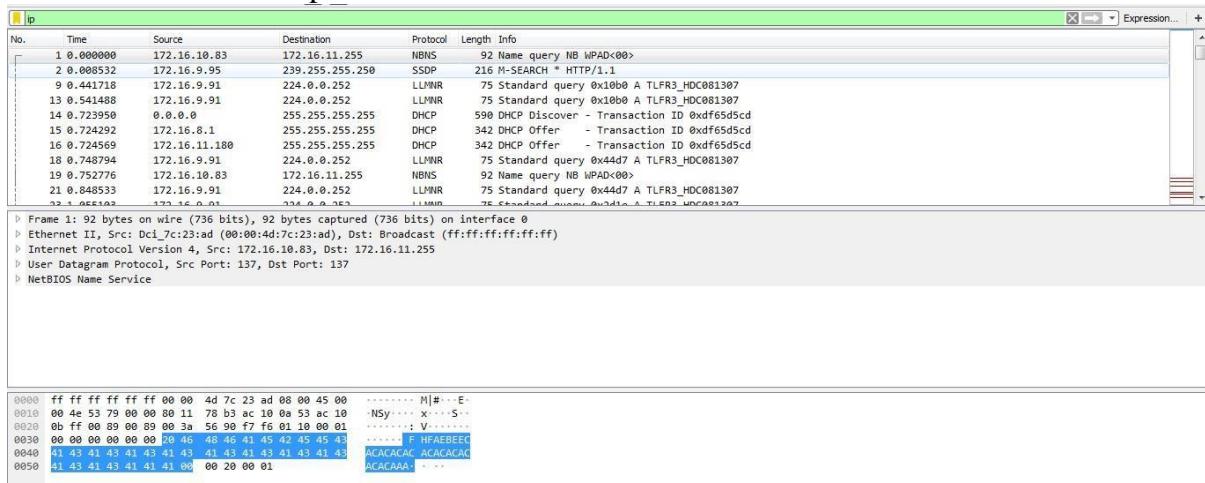


## 6. Create a Filter to display only DHCP packets and inspect the packets.

### Procedure

- Select Local Area Connection in Wireshark.
- Go to capture → option
- Select stop capture automatically after 100 packets.
- Then click Start capture.
- Search DHCP packets in search bar.
- Save the packets

### Output

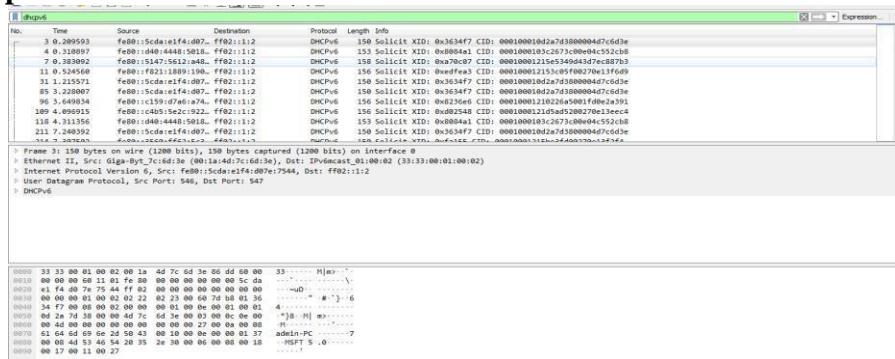

### Student observation:

1. What is promiscuous mode?
2. Does ARP packets has transport layer header? Explain.
3. Which transport layer protocol is used by DNS?
4. What is the port number used by http protocol?
5. What is a broadcast ip address?

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Practical-6**

**AIM:** Write a program to implement error detection and correction using HAMMING code concept. Make a test run to input data stream and verify error correction feature.

### **Error Correction at Data Link Layer:**

Hamming code is a set of error-correction codes that can be used to detect and correct the errors that can occur when the data is transmitted from the sender to the receiver. It is a technique developed by R.W. Hamming for error correction.

### **Create sender program with below features.**

1. Input to sender file should be a text of any length. Program should convert the text to binary.
2. Apply hamming code concept on the binary data and add redundant bits to it.
3. Save this output in a file called channel.

### **Create a receiver program with below features**

1. Receiver program should read the input from Channel file.
2. Apply hamming code on the binary data to check for errors.
3. If there is an error, display the position of the error.
4. Else remove the redundant bits and convert the binary data to ascii and display the output.

### **Student observation:-**

Write the code here:

```
import numpy as np
```

#### **# Function to convert text to binary**

```
def text_to_binary(text):  
    return ''.join(format(ord(char), '08b') for char in text)
```

#### **# Function to convert binary to text**

```
def binary_to_text(binary_data):  
    chars = [chr(int(binary_data[i:i+8], 2)) for i in range(0, len(binary_data), 8)]  
    return ''.join(chars)
```

#### **# Function to calculate redundant bits needed for Hamming Code**

```
def calculate_redundant_bits(m):  
    r = 0  
    while (2 ** r) < (m + r + 1):  
        r += 1  
    return r
```

#### **# Function to apply Hamming Code to add redundant bits to binary data**

```
def apply_hamming_code(data):  
    m = len(data)  
    r = calculate_redundant_bits(m)
```

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Practical-6**

```
hamming_code = ['0'] * (m + r)
j = 0
k = 1
for i in range(1, m + r + 1):
if i == 2 ** j:
j += 1
else:
hamming_code[i - 1] = data[-k]
k += 1

for i in range(r):
x = 2 ** i
one_count = 0
for j in range(1, m + r + 1):
if j & x and hamming_code[j - 1] == '1':
one_count += 1
hamming_code[x - 1] = '1' if one_count % 2 != 0 else '0'

return ''.join(hamming_code[:-1])
```

### **# Function to detect and correct errors in Hamming Code**

```
def detect_and_correct_hamming_code(data):
n = len(data)
r = calculate_redundant_bits(n)
error_position = 0
for i in range(r):
x = 2 ** i
one_count = 0
for j in range(1, n + 1):
if j & x and data[-j] == '1':
one_count += 1
if one_count % 2 != 0:
error_position += x

if error_position > 0:
print(f"Error detected at position: {error_position}")
data = list(data)
data[-error_position] = '1' if data[-error_position] == '0' else '0'
data = ''.join(data)
else:
print("No error detected.")
```

### **# Removing redundant bits**

```
corrected_data = []
j = 0
for i in range(1, n + 1):
if i != 2 ** j:
corrected_data.append(data[-i])
else:
```

# CS19541-COMPUTER NETWORKS-LAB RECORD

## Practical-6

```
j += 1
```

```
return ".join(corrected_data[::-1])
```

### **# Sender Program**

```
def sender(text):
binary_data = text_to_binary(text)
encoded_data = apply_hamming_code(binary_data)
with open("channel.txt", "w") as f:
f.write(encoded_data)
print("Data has been sent to channel.txt.")
```

### **# Receiver Program**

```
def receiver():
with open("channel.txt", "r") as f:
encoded_data = f.read()
print(f"Received encoded data: {encoded_data}")
corrected_data = detect_and_correct_hamming_code(encoded_data)
decoded_text = binary_to_text(corrected_data)
print(f"Decoded text after error correction: {decoded_text}")
```

```
# Example Usage
```

```
# Enter text to send
```

```
text_to_send = "Hello" # Modify the text to test
```

```
sender(text_to_send)
```

```
receiver()
```

Input:-

**Text to send:** "Hello"

Output:

```
Received encoded data: 0100100001100110101101100011010100011001110100
```

```
No error detected.
```

```
Decoded text after error correction: Hello
```

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Practical-6**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Practical-7**

**AIM:** Write a program to implement flow control at data link layer using SLIDING WINDOW PROTOCOL. Simulate the flow of frames from one node to another.

Program should achieve at least below given requirements. You can make it a bidirectional program wherein receiver is sending its data frames with acknowledgement (Piggybacking).

**Create a sender program with following features:-**

1. Input Window size from the user.
2. Input a Text message from the user.
3. Consider 1 character per frame.
4. Create a frame with following fields [Frame no., DATA].
5. Send the frames. [Print the output on screen and save it in a file called Sender\_Buffer.]
6. Wait for the acknowledgement from the Receiver. [Induce delay in the program]
7. Reader a file called Receiver\_Buffer.
8. Check ACK field for the Acknowledgement number.
9. If the Acknowledgement number is as expected, send new set of frames accordingly, [overwrite the Sender\_Buffer file with new frames] Else if NACK is received, resend the frames accordingly. [Overwrite the Sender\_Buffer with old frame].

**Create a receiver file with following features**

1. Reader a file called Sender\_Buffer.
2. Check the Frame no.
3. If the Fame no. are as expected, write the appropriate ACK no. in the Receiver\_Buffer file.  
Else write NACK no. in the Receiver\_Buffer file.

**NOTE: Induce error and verify the behaviour of the program. Manually Change the Frame no and Ack no in the files].**

### **Student observation:**

Write the code here:

```
import random

# Constants for ACK and NACK
ACK = "ACK"
NACK = "NACK"

# Sliding window protocol implementation
def sliding_window_protocol(window_size, message):
    # Split the message into frames (1 character per frame)
    frames = [(i, message[i]) for i in range(len(message))]
    current_window_start = 0
    current_window_end = min(window_size, len(frames))
    expected_ack = current_window_start

    while current_window_start < len(frames):
        print("\n--- SENDING WINDOW ---")
        for i in range(current_window_start, current_window_end):
            print(f"Frame {i}: {frames[i]}")

        ack = input("Enter ACK or NACK: ")
        if ack == ACK:
            current_window_start += 1
            current_window_end = min(current_window_start + window_size, len(frames))
            expected_ack = current_window_start
        else:
            current_window_start = expected_ack
            current_window_end = min(current_window_start + window_size, len(frames))
            expected_ack = current_window_start
```

**Practical-7**

```
# Send frames in the current window
for i in range(current_window_start, current_window_end):
    frame_no, data = frames[i]
    print(f"Sent frame {frame_no} with data '{data}'.")

# Simulate Receiver side: Acknowledge frames
print("\n--- RECEIVER WINDOW ---")
for i in range(current_window_start, current_window_end):
    frame_no, data = frames[i]

# Randomly decide to send ACK or NACK (to simulate error)
ack_type = ACK if random.random() > 0.2 else NACK # 20% chance of NACK
if ack_type == ACK:
    print(f"Frame {frame_no} received correctly. Sending {ACK}.")
else:
    print(f"Error in frame {frame_no}. Sending {NACK}.")
    expected_ack = frame_no # Reset to the frame needing retransmission
    break
else:
    # If no errors in the window, move to the next set of frames
    expected_ack = current_window_end

# Update window based on the acknowledgments received
if expected_ack == current_window_end:
    print("All frames in the window acknowledged correctly. Moving window forward.")
    current_window_start += window_size
    current_window_end = min(current_window_start + window_size, len(frames))
else:
    print(f"Resending frames from frame {expected_ack} due to error.")
    current_window_start = expected_ack
    current_window_end = min(current_window_start + window_size, len(frames))

print("\nAll frames sent and acknowledged successfully.")

# User input for window size and message
window_size = int(input("Enter window size: "))
message = input("Enter the message to send: ")

# Run the sliding window protocol
sliding_window_protocol(window_size, message)
```

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Practical-7**

Input:

Enter window size: 3  
Enter the message to send: HELLO

Output:

```
--- SENDING WINDOW ---  
Sent frame 0 with data 'H'.  
Sent frame 1 with data 'E'.  
Sent frame 2 with data 'L'.  
--- RECEIVER WINDOW ---  
Error in frame 0.  
Sending NACK.  
Resending frames from frame 0 due to error.  
--- SENDING WINDOW ---  
Sent frame 0 with data 'H'.  
Sent frame 1 with data 'E'.  
Sent frame 2 with data 'L'.  
--- RECEIVER WINDOW ---  
Frame 0 received correctly.  
Sending ACK.  
Frame 1 received correctly.  
Sending ACK.  
Frame 2 received correctly.  
Sending ACK.  
All frames in the window acknowledged correctly.  
Moving window forward.  
--- SENDING WINDOW ---  
Sent frame 3 with data 'L'.  
Sent frame 4 with data 'O'.  
--- RECEIVER WINDOW ---  
Error in frame 3.  
Sending NACK.  
Resending frames from frame 3 due to error.  
--- SENDING WINDOW ---  
Sent frame 3 with data 'L'.  
Sent frame 4 with data 'O'.  
--- RECEIVER WINDOW ---  
Frame 3 received correctly.  
Sending ACK. Error in frame 4.  
Sending NACK.  
Resending frames from frame 4 due to error.
```

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

### **Practical-7**

--- SENDING WINDOW ---

Sent frame 4 with data 'O'.

--- RECEIVER WINDOW ---

Frame 4 received correctly.

Sending ACK.

All frames in the window acknowledged correctly.

Moving window forward.


All frames sent and acknowledged successfully.

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

## Practical-8

**AIM:** - a) Simulate Virtual LAN configuration using CISCO Packet Tracer Simulation.

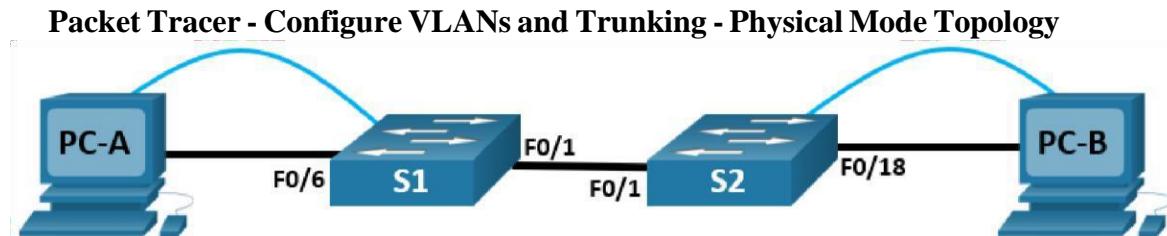

Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway
S1	VLAN 1	192.168.1.11	255.255.255.0	N/A
S2	VLAN 1	192.168.1.12	255.255.255.0	N/A
PC-A	NIC	192.168.10.3	255.255.255.0	192.168.10.1
PC-B	NIC	192.168.10.4	255.255.255.0	192.168.10.1

*Blank Line - no additional information*

### Objectives

**Part 1: Build the Network and Configure Basic Device Settings**

**Part 2: Create VLANs and Assign Switch Ports**

**Part 3: Maintain VLAN Port Assignments and the VLAN Database Part 4: Configure an 802.1Q Trunk between the Switches**

### Background / Scenario

Modern switches use virtual local-area networks (VLANs) to improve network performance by separating large Layer 2 broadcast domains into smaller ones. VLANs can also be used as a security measure by controlling which hosts can communicate. In general, VLANs make it easier to design a network to support the goals of an organization.

VLAN trunks are used to span VLANs across multiple devices. Trunks allow the traffic from multiple VLANs to travel over a single link, while keeping the VLAN identification and segmentation intact.

In this Packet Tracer Physical Mode (PTPM) activity, you will create VLANs on both switches in the topology, assign VLANs to switch access ports, and verify that VLANs are working as expected. You will then create a VLAN trunk between the two switches to allow hosts in the same VLAN to communicate through the trunk, regardless of which switch to which the host is attached.

### Instructions

**Part 1: Build the Network and Configure Basic Device Settings**

**Step 1: Build the network as shown in the topology.**

Attach the devices as shown in the topology diagram, and cable as necessary. a. Click and drag both switch **S1** and **S2** to the **Rack**.

- b. Click and drag both **PC-A** and **PC-B** to the **Table** and use the power button to turn them on.

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

- c. Provide network connectivity by connecting **Copper Straight-through** cables, as shown in the topology.
- d. Connect **Console Cable** from device **PC-A** to **S1** and from device **PC-B** to **S2**.

### **Step 2: Configure basic settings for each switch.**

- a. From the **Desktop Tab** on each PC, use the **Terminal** to console into each switch and enable privileged EXEC mode.  
*Open configuration window*
- b. Enter configuration mode.
- c. Assign a device name to each switch.
- d. Assign **class** as the privileged EXEC encrypted password.
- e. Assign **cisco** as the console password and enable login.
- f. Assign **cisco** as the vty password and enable login.
- g. Encrypt the plaintext passwords.
- h. Create a banner that warns anyone accessing the device that unauthorized access is prohibited.
- i. Configure the IP address listed in the Addressing Table for VLAN 1 on the switch.  
**Note:** The VLAN 1 address is not grade because you will remove it later in the activity. However, you will need VLAN 1 to test connectivity later in this Part.
- j. Shut down all interfaces that will not be used.
- k. Set the clock on each switch.  
**Note:** The clock setting cannot be graded in Packet Tracer.
- l. Save the running configuration to the startup configuration file.  
*Close configuration window*

### **Step 3: Configure PC hosts.**

From the **Desktop** tab on each **PC**, click **IP Configuration** and enter the addressing information as displayed in the Addressing Table.

### **Step 4: Test connectivity.**

Test network connectivity by attempting to ping between each of the cabled devices.

Questions:

- Can PC-A ping PC-B?
- Can PC-A ping S1?
- Can PC-B ping S2?
- Can S1 ping S2?

*Close configuration window*

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Part 2: Create VLANs and Assign Switch Ports**

In Part 2, you will create Management, Operations, Parking Lot, and Native VLANs on both switches. You will then assign the VLANs to the appropriate interface. The **show vlan** command is used to verify your configuration settings.

### **Step 1: Create VLANs on the switches.**

From the **Desktop Tab** on each **PC**, use Terminal to continue configuring both network switches.

*Open configuration window*

- a. Create the VLANs on **S1**.

```
S1(config)# vlan 10
S1(config-vlan)# name Operations
S1(config-vlan)# vlan 20
S1(config-vlan)# name Parking_Lot
S1(config-vlan)# vlan 99
S1(config-vlan)# name Management
S1(config-vlan)# vlan 1000
S1(config-vlan)# name Native
S1(config-vlan)# end
```

- b. Create the same VLANs on **S2**.

- c. Issue the **show vlan brief** command to view the list of VLANs on **S1**.

```
S1# show vlan brief
```

VLAN Name	Status	Ports
1 default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10, Fa0/11, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/18, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24 Gi0/1, Gi0/2
10 Operations	active	
20 Parking_Lot	active	
99 Management	active	
1000 Native	active	
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

Questions:

What is the default VLAN?

What ports are assigned to the default VLAN?

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Step 2: Assign VLANs to the correct switch interfaces.**

- a. Assign VLANs to the interfaces on S1.

- 1) Assign PC-A to the Operation VLAN.

```
S1(config)# interface f0/6
```

```
S1(config-if)# switchport mode access
```

```
S1(config-if)# switchport access vlan 10
```

- 2) From VLAN 1, remove the management IP address and configure it on VLAN 99.

```
S1(config)# interface vlan 1
```

```
S1(config-if)# no ip address
```

```
S1(config-if)# interface vlan 99
```

```
S1(config-if)# ip address 192.168.1.11 255.255.255.0
```

```
S1(config-if)# end
```

- b. Issue the **show vlan brief** command and verify that the VLANs are assigned to the correct interfaces.
  - c. Issue the **show ip interface brief** command.

Question:

What is the status of VLAN 99? Explain.

- d. Assign **PC-B** to the Operations VLAN on **S2**.

- e. From VLAN 1, remove the management IP address and configure it on VLAN 99 according to the Addressing Table.

- f. Use the **show vlan brief** command to verify that the VLANs are assigned to the correct interfaces.

Questions:

Is S1 able to ping S2? Explain.

Is PC-A able to ping PC-B? Explain.

## **Part 3: Maintain VLAN Port Assignments and the VLAN Database**

In Part 3, you will change port VLAN assignments and remove VLANs from the VLAN database.

### **Step 1: Assign a VLAN to multiple interfaces.**

From the **Desktop Tab** on each PC, use **Terminal** to continue configuring both network switches.

*Open configuration window*

- a. On S1, assign interfaces F0/11 – 24 to VLAN99.

```
S1(config)# interface range f0/11-24
```

```
S1(config-if-range)# switchport mode access
```

```
S1(config-if-range)# switchport access vlan 99
```

```
S1(config-if-range)# end
```

- b. Issue the **show vlan brief** command to verify VLAN assignments.

- c. Reassign F0/11 and F0/21 to VLAN 10.

- d. Verify that VLAN assignments are correct.

### **Step 2: Remove a VLAN assignment from an interface.**

- a. Use the **no switchport access vlan** command to remove the VLAN 99 assignment to F0/24.

```
S1(config)# interface f0/24
```

```
S1(config-if)# no switchport access vlan
```

```
S1(config-if)# end
```

- b. Verify that the VLAN change was made.

Question:

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

Which VLAN is F0/24 now associated with?

### **Step 3: Remove a VLAN ID from the VLAN database.**

- a. Add VLAN 30 to interface F0/24 without issuing the global VLAN command.

S1(config)# **interface f0/24**

S1(config-if)# **switchport access vlan 30**

% Access VLAN does not exist. Creating vlan 30

**Note:** Current switch technology no longer requires that the **vlan** command be issued to add a VLAN to the database. By assigning an unknown VLAN to a port, the VLAN will be created and added to the VLAN database.

- b. Verify that the new VLAN is displayed in the VLAN table.

Question:

What is the default name of VLAN 30?

- c. Use the **no vlan 30** command to remove VLAN 30 from the VLAN database.

S1(config)# **no vlan 30**

S1(config)# **end**

- d. Issue the **show vlan brief** command. F0/24 was assigned to VLAN 30.

Question:

After deleting VLAN 30 from the VLAN database, why is F0/24 no longer displayed in the output of the **show vlan brief** command? What VLAN is port F0/24 now assigned to? What happens to the traffic destined to the host that is attached to F0/24?

- e. On interface F0/24, issue the **no switchport access vlan** command.

- f. Issue the **show vlan brief** command to determine the VLAN assignment for F0/24.

Questions:

To which VLAN is F0/24 assigned?

**Note:** Before removing a VLAN from the database, it is recommended that you reassign all the ports assigned to that VLAN.

Why should you reassign a port to another VLAN before removing the VLAN from the VLAN database?

*Close configuration window.*

### **Part 4: Configure an 802.1Q Trunk Between the Switches**

In Part 4, you will configure interface F0/1 to use the Dynamic Trunking Protocol (DTP) to allow it to negotiate the trunk mode. After this has been accomplished and verified, you will disable DTP on interface F0/1 and manually configure it as a trunk.

#### **Step 1: Use DTP to initiate trunking on F0/1.**

The default DTP mode of a 2960 switch port is dynamic auto. This allows the interface to convert the link to a trunk if the neighboring interface is set to trunk or dynamic desirable mode.

*Open configuration window*

- a. On **S1**, set F0/1 to negotiate trunk mode.

S1(config)# **interface f0/1**

S1(config-if)# **switchport mode dynamic desirable**

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

Sep 19 02:51:47.257: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Sep 19 02:51:47.291: %LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan99, changed state to up

You should also receive link status messages on S2.

S2#

Sep 19 02:42:19.424: %LINK-3-UPDOWN: Interface FastEthernet0/1, changed state to up

Sep 19 02:42:21.454: %LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan99, changed state to up

Sep 19 02:42:22.419: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

- b. On **S1** and **S2**, issue the **show vlan brief** command. Interface F0/1 is no longer assigned to VLAN 1. Trunked interfaces are not listed in the VLAN table.
- c. Issue the **show interfaces trunk** command to view trunked interfaces. Notice that the mode on **S1** is set to desirable, and the mode on **S2** is set to auto.  
**S1# show interfaces trunk**

**S2# show interfaces trunk**

**Note:** By default, all VLANs are allowed on a trunk. The **switchport trunk** command allows you to control what VLANs have access to the trunk. For this activity, keep the default settings. This allows all VLANs to traverse F0/1.

*Close configuration window*

- d. Verify that VLAN traffic is traveling over trunk interface F0/1.

Questions:

Can S1 ping S2?

Can PC-A ping PC-B?

Can PC-A ping S1?

Can PC-B ping S2?

## **Step 2: Manually configure trunk interface F0/1.**

The **switchport mode trunk** command is used to manually configure a port as a trunk. This command should be issued on both ends of the link.

- a. On interface F0/1, change the switchport mode to force trunking. Make sure to do this on both switches.

*Open configuration window*

**S1(config)# interface f0/1**

**S1(config-if)# switchport mode trunk**

- b. Issue the **show interfaces trunk** command to view the trunk mode. Notice that the mode changed from **desirable** to **on**.

**S1# show interfaces trunk**

- c. Modify the trunk configuration on both switches by changing the native VLAN from VLAN 1 to VLAN 1000.

**S1(config)# interface f0/1**

**S1(config-if)# switchport trunk native vlan 1000**

- d. Issue the **show interfaces trunk** command to view the trunk. Notice the Native VLAN information is updated.

**S2# show interfaces trunk**

Questions:

Why might you want to manually configure an interface to trunk mode instead of using DTP?

Why might you want to change the native VLAN on a trunk?

*Close configuration window*

## **CS19541-COMPUTER NETWORKS-LAB**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

### **Reflection Questions**

1. What is needed to allow hosts on VLAN 10 to communicate to hosts on VLAN 99?
  2. What are some primary benefits that an organization can receive through effective use of VLANs?
- 
- 

### **b) Design and configure a VLAN for the below given scenario.**

There are 10 faculty in Robotics department, sitting in 3 different blocks. Design and configure a Virtual LAN for Robotics department (using switch and Ethernet cables) so that all the faculty are logically in the same LAN.

### **Student observation:-**

- a) Draw and Label the VLAN for Qb).
- b) Show the ip configuration for each device.
- c) Write the commands used for VLAN configuration in switch.

## **CS19541-COMPUTER NETWORKS-LAB RECORD**


---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Practical-8**

### **AIM:-b) Configuration of Wireless LAN using CISCO Packet Tracer.**

Design a topology with three PCs connected from Linksys Wireless routers.

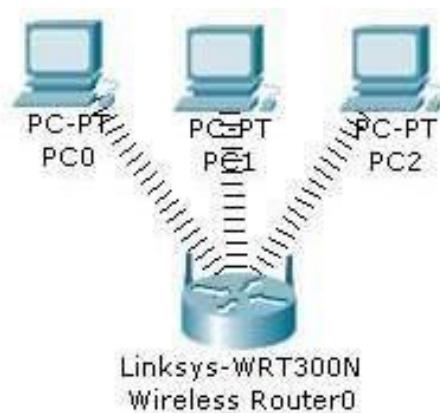

Perform following configuration:-

- Configure Static IP on PC and Wireless Router
- Set SSID to MotherNetwork
- Set IP address of router to 192.168.0.1, PC0 to 192.168.0.2, PC1 to 192.168.0.3 and PC2 to 192.168.0.4.
- Secure your network by configuring WAP key on Router
- Connect PC by using WAP key

To complete these tasks follow these step by step instructions:-

Step1:- Click on wireless router,

- Select Administration tab from top Menu, set username and password to admin and click on Save Setting.



# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## CS19541-COMPUTER NETWORKS-LAB RECORD

- Next click on wireless tab and set default SSID to MotherNetwork.
- Now Select wireless security and change Security Mode to WEP



- Set Key1 to 0123456789



- Again go in the end of page and Click on Save Setting
- Now we have completed all given task on Wireless router. Now configure the static IP on all three PC's
- Double click on pc select Desktop tab click on IP configuration select Static IP and set IP as given below


PC	IP	Subnet Mask	Default Gateway
PC0	192.168.0.2	255.255.255.0	192.168.0.1
PC1	192.168.0.3	255.255.255.0	192.168.0.1
PC2	192.168.0.4	255.255.255.0	192.168.0.1

## **CS19541-COMPUTER NETWORKS-LAB RECORD**


---

## CS19541-COMPUTER NETWORKS-LAB RECORD

- Now it's time to connect PC's from Wireless router. To do so click PC select Desktop click on PC Wireless

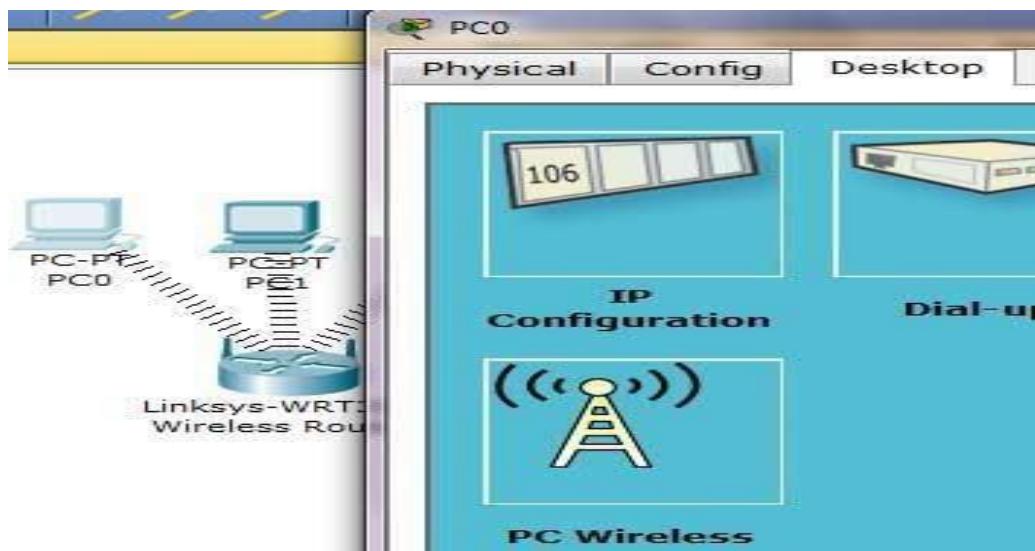

- Click on connect tab and click on Refresh button

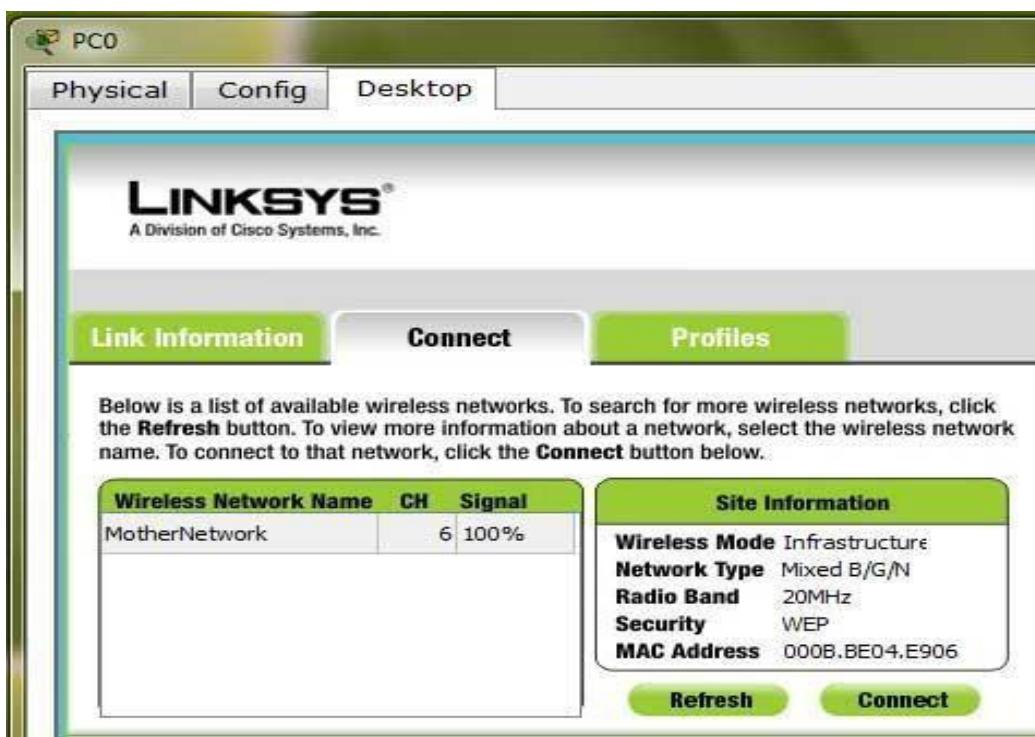


As you can see in image that Wireless device is accessing MotherNetwork on CH 6 and signal strength is 100%. In left side you can see that WEP security is configured in network. Click on connect button to connect MotherNetwork

- It will ask for WAP key insert 0123456789 and click connect

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

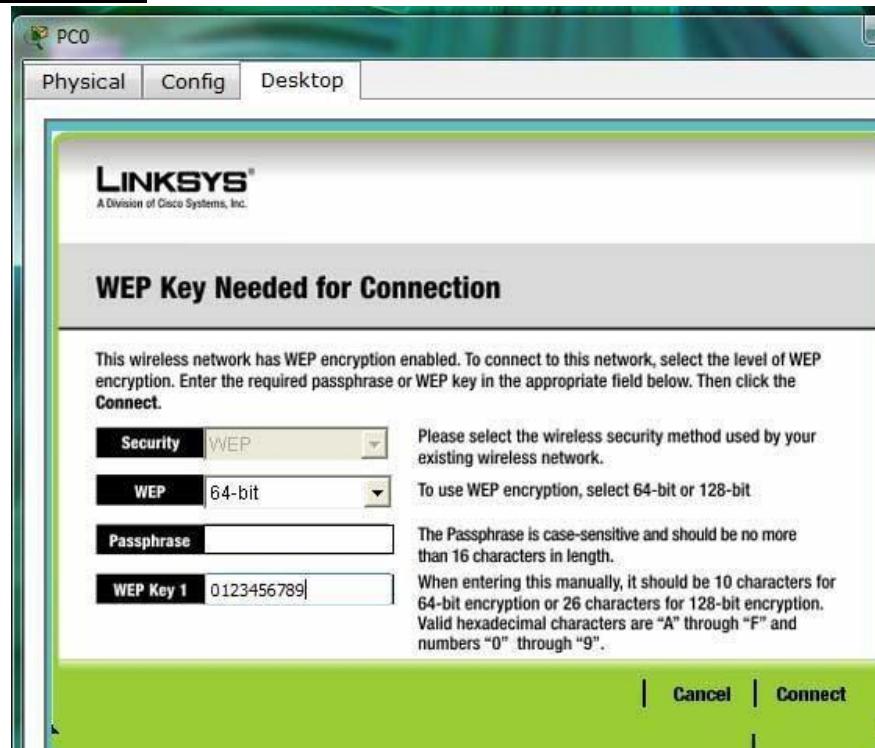

It will connect you with wireless router.

As you can see in image below that system is connected. And PCI card is active.



- Repeat same process on PC1 and PC2.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB**

### **RECORD**

#### **Student observation:**

- c) **What is SSID of a wireless router?**
- d) **What is a security key in wireless router?**
- e) **Configure a simple Wireless LAN in your lab using a real access point and write down the configurations in your notebook.**

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

## Practical-9

### **AIM:-Implementation of SUBNETTING in CISCO PACKET TRACER simulator.**

Classless IP subnetting is a technique that allows for more efficient use of IP addresses by allowing for subnet masks that are not just the default masks for each IP class. This means that we can divide our IP address space into smaller subnets, which can be useful when we have a limited number of IP addresses but need to create multiple networks.

#### **CREATING A NETWORK TOPOLOGY:**


The first step in implementing classless IP subnetting is to create a network topology in Packet Tracer. To create a network topology in Packet Tracer, select the "New" button in the top left corner, then select "Network" and "Generic". This will create a blank network topology that we can use to add devices.

#### **ADDING THE DEVICES:**

Once we have created our network topology, we can add devices to it. Here, we will be adding routers, switches, and PCs. To add a device, select the device from the bottom left corner and drag it onto the network topology. Then, connect the devices by dragging a cable from one device's port to another device's port.

#### **SUBNETTING:**

To subnet the network address of 192.168.1.0/24 to provide enough space for at least 5 addresses for end devices, the switch, and the router, we can use a /27 subnet mask. This will give us 8 subnets with 30 host addresses each.

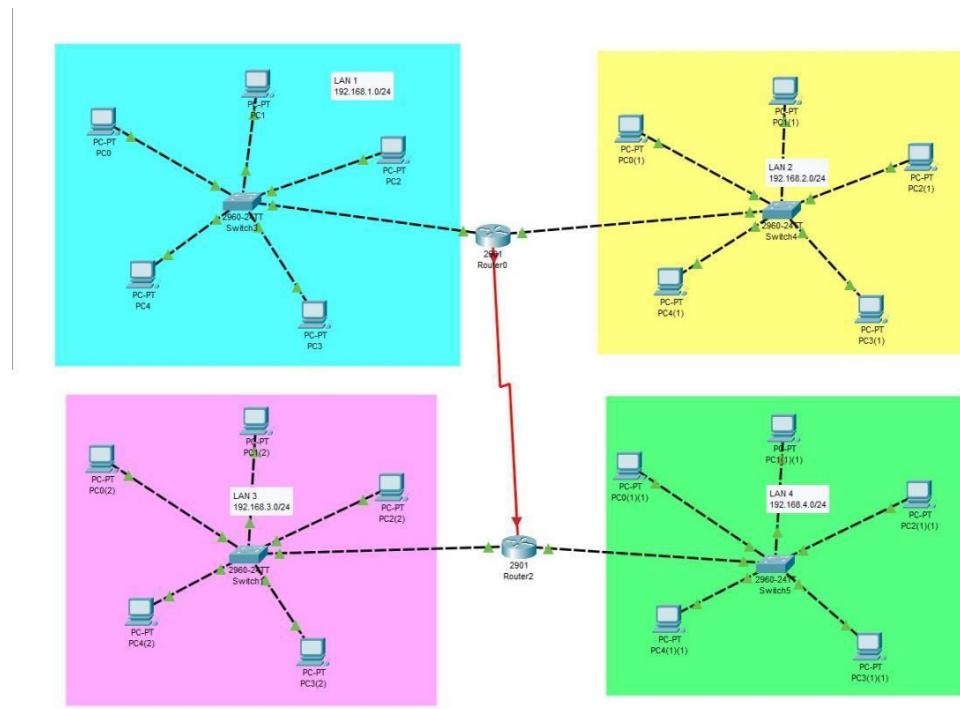

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

The IP addressing for the network shown in the topology can be as follows:

- Router R1:
  - GigabitEthernet0/0: 192.168.1.1
  - GigabitEthernet0/1: 192.168.2.1
- Switch S1:
  - FastEthernet0/1: 192.168.1.0/27
  - PC1: 192.168.1.11
  - PC2: 192.168.1.12
  - PC3: 192.168.1.13
  - PC4: 192.168.1.14
  - PC5: 192.168.1.15
- FastEthernet0/2: 192.168.2.0/27
  - PC1: 192.168.2.11
  - PC2: 192.168.2.12
  - PC3: 192.168.2.13
  - PC4: 192.168.2.14
  - PC5: 192.168.2.15
- Router R2:
  - FastEthernet0/0: 192.168.3.1
  - FastEthernet0/1: 192.168.4.1
- Switch S2:
  - FastEthernet0/1: 192.168.3.0/27
  - PC1: 192.168.3.11
  - PC2: 192.168.3.12
  - PC3: 192.168.3.13
  - PC4: 192.168.3.14
  - PC5: 192.168.3.15
- FastEthernet0/2: 192.168.4.0/27
  - PC1: 192.168.4.11
  - PC2: 192.168.4.12
  - PC3: 192.168.4.13
  - PC4: 192.168.4.14
  - PC5: 192.168.4.15

### **CONFIGURING THE DEVICES:**

Now that we have added our devices and connected them, we can start configuring them. We will start by configuring the router. Right-click on the router and select "CLI". This will open the command-line interface (CLI) for the router. In the CLI, enter the following commands:

```
#enable  
#configure terminal  
#interface FastEthernet0/0  
#ip address {IP address} {subnet mask}  
#no shutdown  
#exit
```

```
interface FastEthernet0/1  
ip address {IP address} {subnet mask}
```

```
no shutdown  
exit
```

## **CS19541-COMPUTER NETWORKS-LAB**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

Replace "{IP address}" and "{subnet mask}" with your desired IP address and subnet mask. The first interface, FastEthernet0/0, will be connected to the switch, while the second interface, FastEthernet0/1, will be connected to one of the PCs. These commands configure the router's interfaces with IP addresses and subnet masks.

Next, we will configure the switch. Right-click on the switch and select "CLI". In the CLI, enter the following commands:

```
enable  
configure terminal  
interface FastEthernet0/1  
switchport mode access  
exit  
  
interface FastEthernet0/2  
switchport mode access  
exit
```

These commands configure the switch to operate in access mode on its two ports, which are connected to the two PCs.

Finally, we will configure the PCs. Right-click on each PC and select "Config". In the configuration window, enter the IP address, subnet mask, default gateway, and DNS server information. The IP address and subnet mask should be within the same subnet as the router's FastEthernet0/1 interface.

To configure the GigabitEthernet interface on the router, you can follow these steps:

1. Right-click on the router and select "CLI".
2. Enter the following commands:

```
enable  
configure terminal  
interface GigabitEthernet0/0  
ip address {IP address} {subnet mask}  
no shutdown  
exit
```

Replace "{IP address}" and "{subnet mask}" with your desired IP address and subnet mask. These commands configure the GigabitEthernet interface with an IP address and subnet mask, and enable the interface.

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

## CS19541-COMPUTER NETWORKS-LAB RECORD

### **TESTING THE NETWORK:**

Now that our network topology is configured, we can test the network. Open a command prompt on each PC and try to ping the other PC. If the ping is successful, then the network is functioning properly. We can also use the "ping" command to test connectivity between the router and the PCs.

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num
●	Successful	PC4(2)	Router2	ICMP	Green	0.000	N	12
●	Successful	PC4(2)	PC2(1)(1)	ICMP	Blue	0.000	N	13
●	Successful	PC0	Router0	ICMP	Light Blue	0.000	N	14

### Student observation:

- Write down your understanding of subnetting.
- What is the advantage of implementing subnetting within a Network?
- Find out whether subnetting is implemented in your college. If yes, draw and list down the subnets used with ip addresses.

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

---


# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Practical-10**

**AIM:-a) Internetworking with routers in CISCO PACKET TRACER simulator.**

**d) Design and configure a simple internetwork using a router.**

In this network, a router and 2 PCs are used. Computers are connected with routers using a copper straight-through cable. After forming the network, to check network connectivity a simple PDU is transferred from PC0 to PC1.

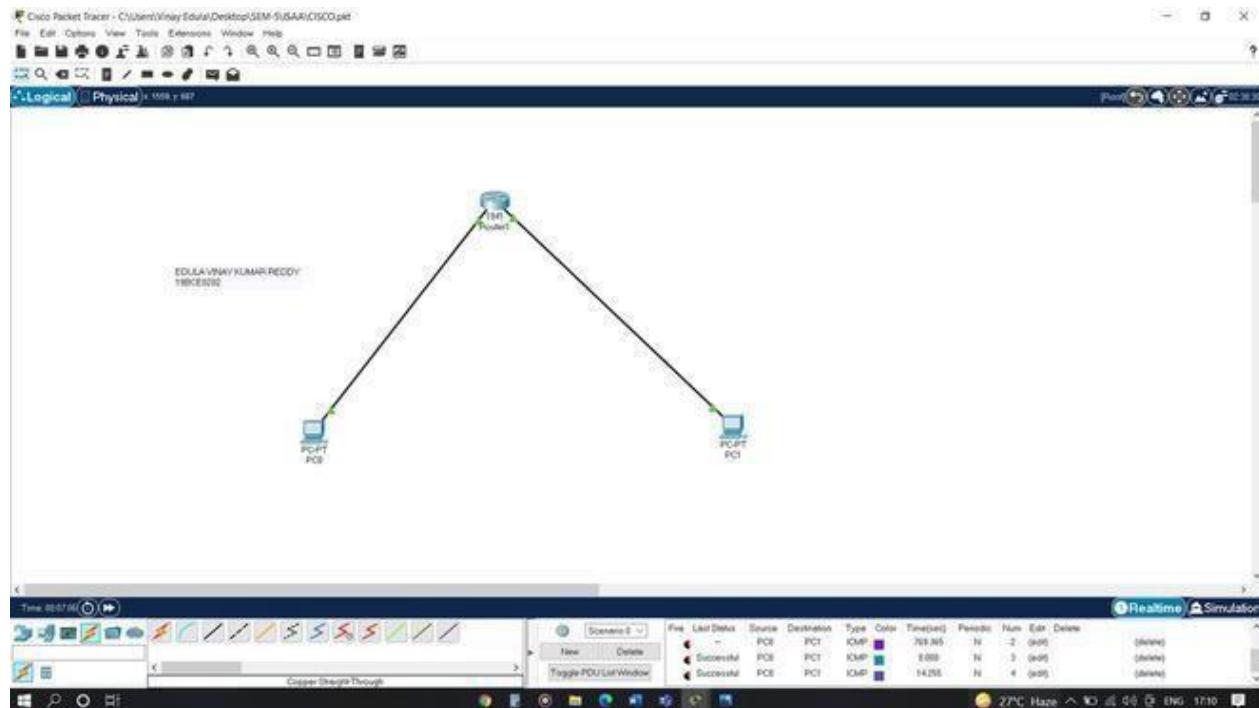

### **Procedure:**

#### **Step-1(Configuring Router1):**

1. Select the router and Open CLI.
2. Press ENTER to start configuring Router1.
3. Type enable to activate the privileged mode.

#### **Router1 Command Line Interface:**

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
Router(config-if)#interface FastEthernet0/1
Router(config-if)#ip address 192.168.20.1 255.255.255.0
Router(config-if)#no shutdown
```

## **CS19541-COMPUTER NETWORKS-LAB**

**Step-2(Configuring PCs):**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

1. Assign IP Addresses to every PC in the network.
2. Select the PC, Go to the desktop and select IP Configuration and assign an IP address, Default gateway, Subnet Mask
3. Assign the default gateway of PC0 as 192.168.10.1.
4. Assign the default gateway of PC1 as 192.168.20.1.

### **Step-3(Connecting PCs with Router):**

1. Connect FastEthernet0 port of PC0 with FastEthernet0/0 port of Router1 using a copper straight-through cable.
2. Connect FastEthernet0 port of PC1 with FastEthernet0/1 port of Router1 using a copper straight-through cable.

### **Router Configuration Table:**

<b>Device Name</b>	<b>IP address FastEthernet0 /0</b>	<b>Subnet Mask</b>	<b>IP Address FastEthernet0/1</b>	<b>Subnet Mask</b>
Router1	192.168.10.1	255.255.255.0	192.168.20.1	255.255.255.0

### **PC Configuration Table:**

<b>Device Name</b>	<b>IP address</b>	<b>Subnet Mask</b>	<b>Gateway</b>
PC 0	192.168.10.2	255.255.255.0	192.168.10.1
PC 1	192.168.20.2	255.255.255.0	192.168.20.1

# **CS19541-COMPUTER NETWORKS-LAB RECORD**


---

# CS19541-COMPUTER NETWORKS-LAB RECORD

Designed Network topology:

Simulation of Designed Network Topology:

Sending a PDU From PC0 to PC1:

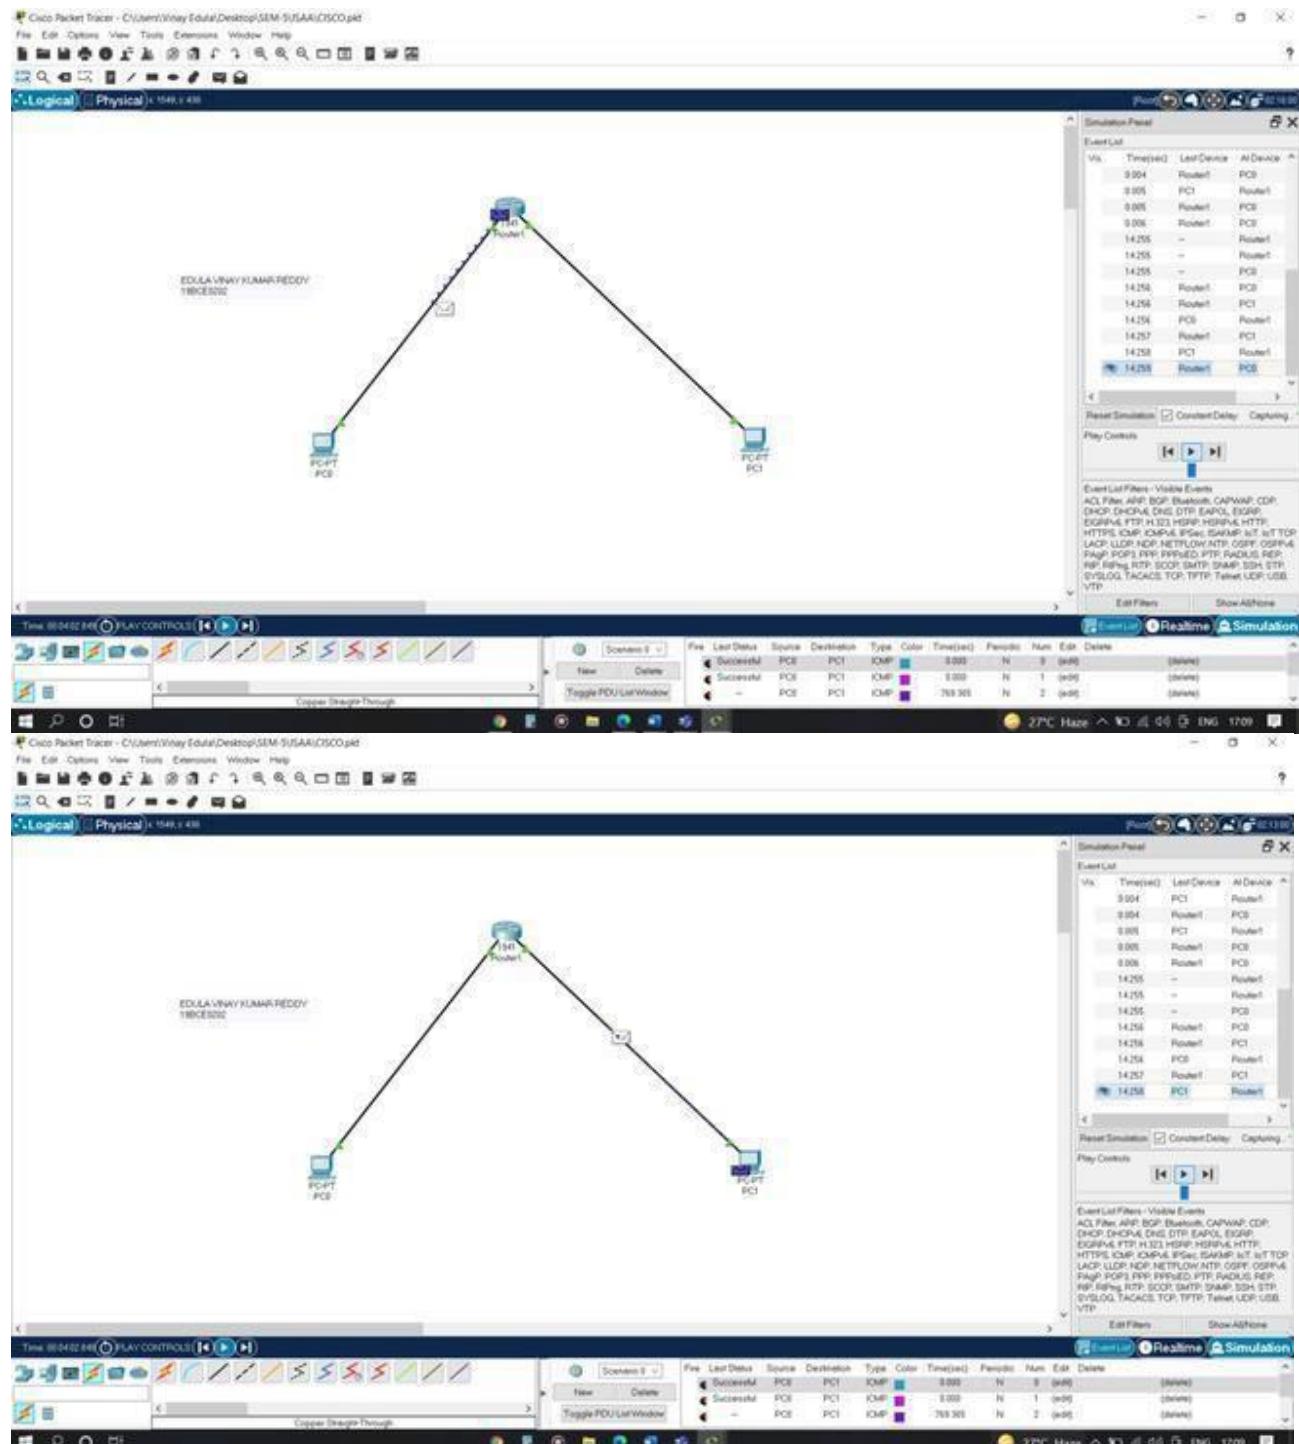


**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

Acknowledgment From PC1 to PC0:

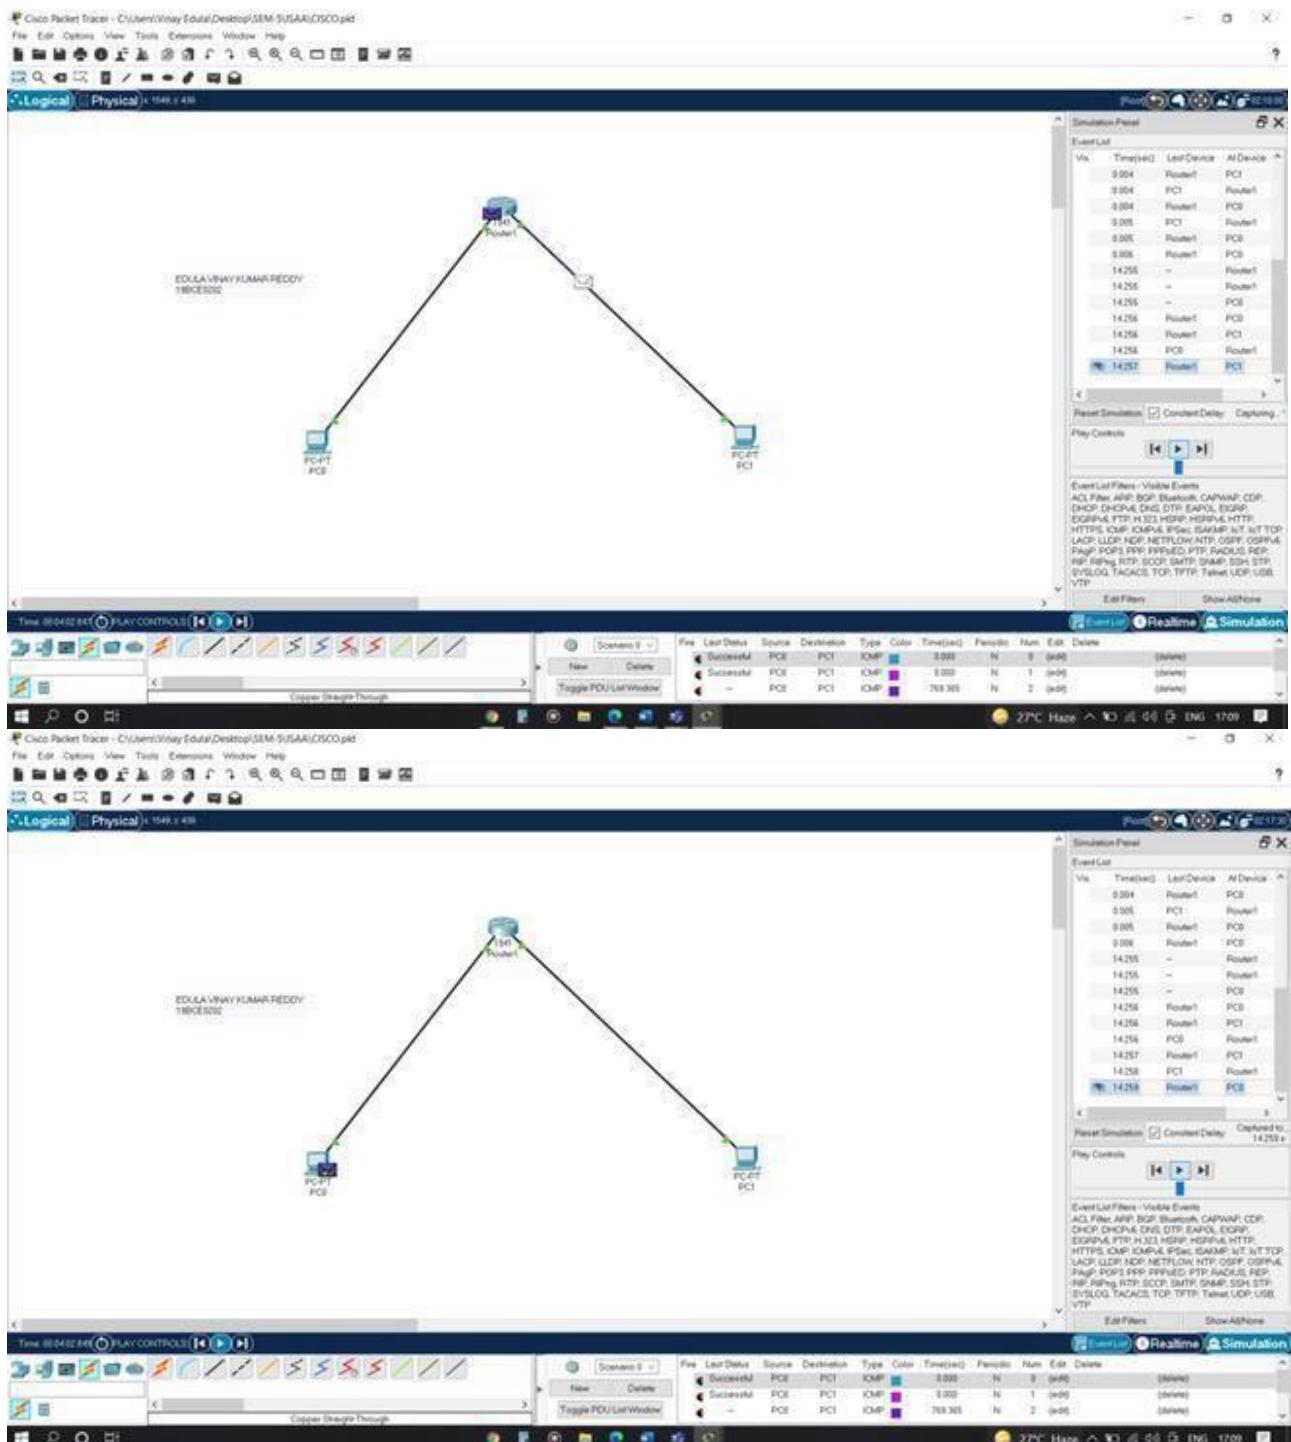


**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

## Practical 10

**AIM:- b)** Design and configure an internetwork using wireless router, DHCP server and internet cloud.

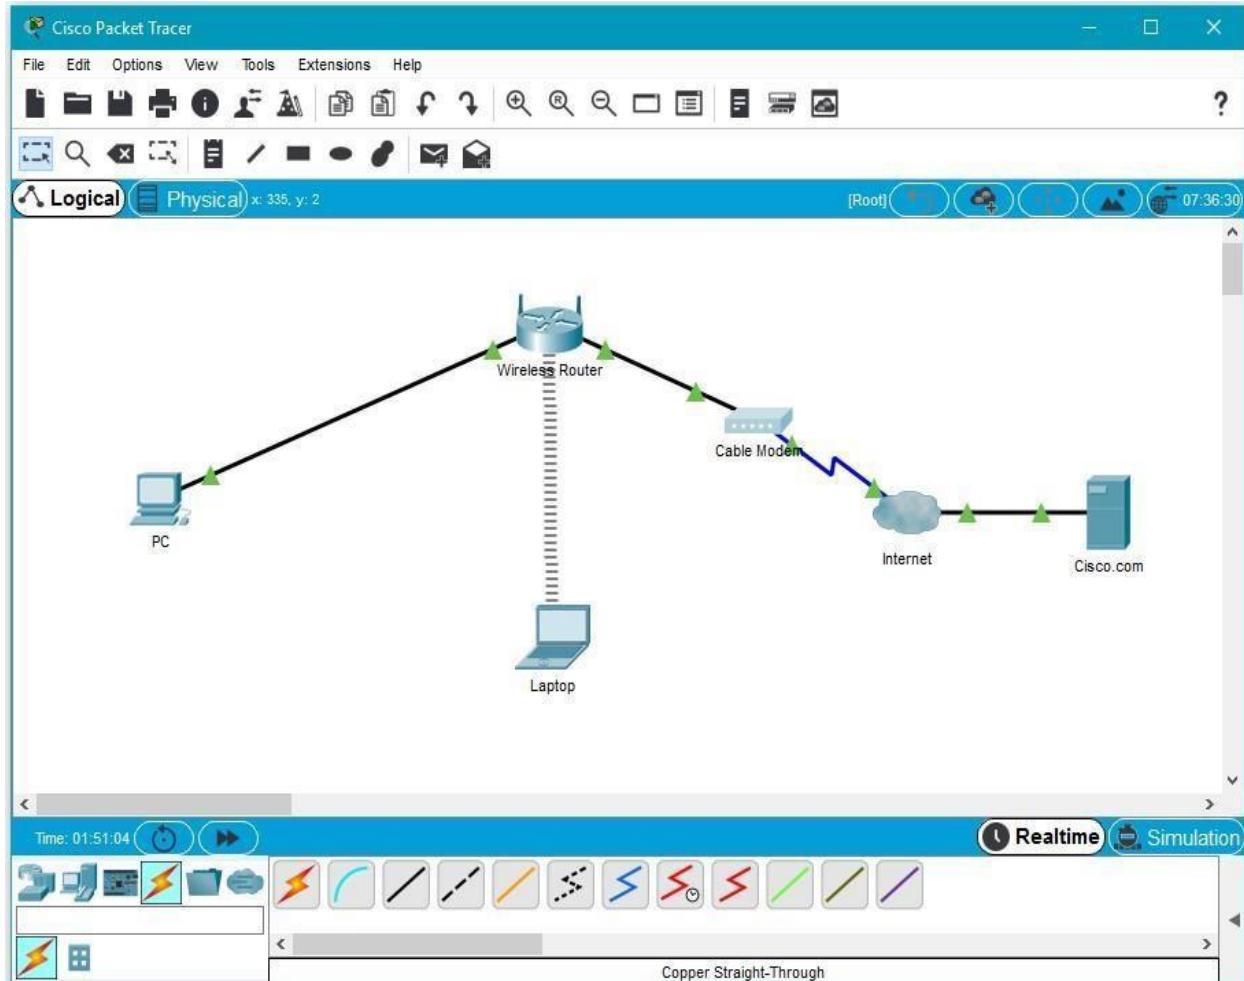

**Addressing Table**

Device	Interface	IP Address	Subnet Mask	Default Gateway
PC	Ethernet0	DHCP		192.168.0.1
Wireless Router	LAN	192.168.0.1	255.255.255.0	
Wireless Router	Internet	DHCP		
Cisco.com Server	Ethernet0	208.67.220.220	255.255.255.0	
Laptop	Wireless0	DHCP		

## **Objectives**

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

Part 1: Build a Simple Network in the Logical Topology Workspace

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

**Part 2: Configure the Network Devices**  
**Part 3: Test Connectivity between Network Devices** **Part 4: Save the File and Close Packet Tracer**

**Part 1: Build a Simple Network in the Logical Topology Workspace**

## **Step 1: Launch Packet Tracer.**

### **Step 2: Build the topology**


- Add network devices to the workspace.

Using the device selection box, add the network devices to the workspace as shown in the topology diagram.

To place a device onto the workspace, first choose a device type from the **Device-Type Selection** box. Then, click on the desired device model from the **Device-Specific Selection** box. Finally, click on a location in the workspace to put your device in that location. If you want to cancel your selection, click the **Cancel** icon for that device. Alternatively, you can click and drag a device from the **Device-Specific Selection** box onto the workspace.

- Change display names of the network devices.

To change the display names of the network devices click on the device icon on the Packet Tracer **Logical** workspace, then click on the **Config** tab in the device configuration window. Type the new name of the device into the **Display Name** box as show in the figure below.

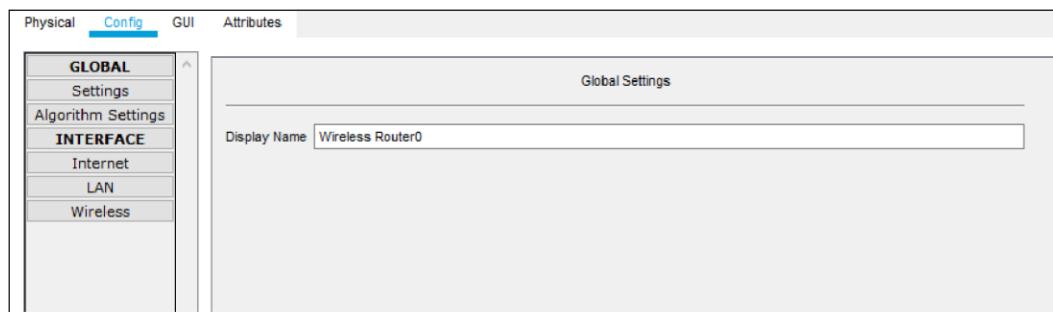

- Add the physical cabling between devices on the workspace

Using the device selection box, add the physical cabling between devices on the workspace as shown in the topology diagram.

The PC will need a copper straight-through cable to connect to the wireless router. Select the copper straight-through cable in the device selection box and attach it to the FastEthernet0 interface of the PC and the Ethernet 1 interface of the wireless router.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

The wireless router will need a copper straight-through cable to connect to the cable modem. Select the copper straight-through cable in the device-selection box and attach it to the Internet interface of the wireless router and the Port 1 interface of the cable modem.

The cable modem will need a coaxial cable to connect to the Internet cloud. Select the coaxial cable in the device-selection box and attach it to the Port 0 interface of the cable modem and the coaxial interface of the Internet cloud.

The Internet cloud will need copper straight-through cable to connect to the Cisco.com server. Select the copper straight-through cable in the device-selection box and attach it to the Ethernet interface of the Internet cloud and the FastEthernet0 interface of the Cisco.com server.

## **Part 2: Configure the Network Devices**


### **Step 1: Configure the wireless router**

- Create the wireless network on the wireless router

Click on the **Wireless Router** icon on the Packet Tracer **Logical** workspace to open the device configuration window.

In the wireless router configuration window, click on the **GUI** tab to view configuration options for the wireless router.

Next, click on the **Wireless** tab in the GUI to view the wireless settings. The only setting that needs to be changed from the defaults is the **Network Name (SSID)**. Here, type the name “HomeNetwork” as shown in the figure.

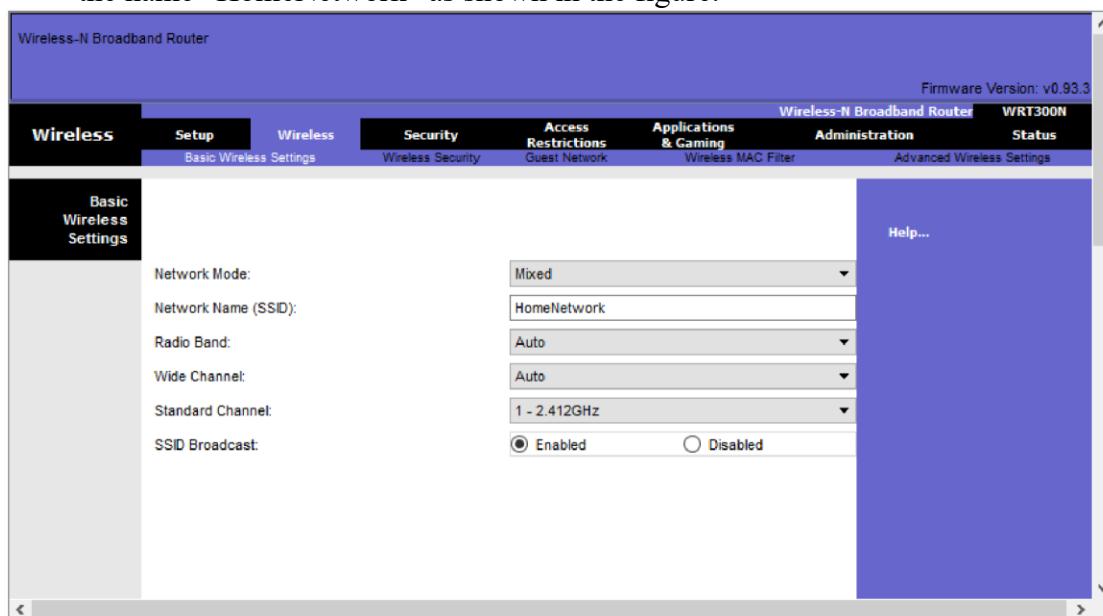

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

Configure the Internet connection on the wireless router  
Click on the **Setup** tab in the wireless router GUI.

In the **DHCP Server** settings verify that the **Enabled** button is selected and configure the static IP address of the DNS server as 208.67.220.220 as shown in the figure.

- b. Click on the **Save Settings** tab.

The screenshot shows the 'Internet Setup' section of the router's configuration interface. Under 'Optional Settings (required by some internet service providers)', the 'Host Name' field is empty, and the 'Domain Name' field contains 'example.com'. The 'MTU' dropdown is set to 1500. In the 'Network Setup' section, under 'Router IP', the IP Address is set to 192.168.0.1 and the Subnet Mask is 255.255.255.0. Under 'DHCP Server Settings', the 'DHCP Server' is enabled (radio button selected). The 'Start IP Address' is 192.168.0.100, and the 'Maximum number of Users' is 50. The 'IP Address Range' is 192.168.0.100 - 149. The 'Client Lease Time' is set to 0 minutes (0 means one day). The 'Static DNS 1' is 208.67.220.220, and 'Static DNS 2' is 0.0.0.0. The 'WINS' fields are all 0. The top right corner of the interface shows 'Firmware Version: v0.93.3' and the model 'Wireless-N Broadband Router WRT300N'.

## Step 2: Configure the laptop

- a. Configure the Laptop to access the wireless network

Click on the Laptop icon on the Packet Tracer **Logical** workspace and in the laptop configuration windows select the **Physical** tab.

In the **Physical** tab you will need to remove the Ethernet copper module and replace it with the Wireless WPC300N module.

To do this, you first power the Laptop off by clicking the power button on the side of the laptop. Then remove the currently installed Ethernet copper module by clicking on the module on the side of the laptop and dragging it to the **MODULES** pane on the left of the laptop window. Then install the Wireless WPC300N module by clicking on it in the **MODULES** pane and dragging it to the empty module port on the side of the laptop. Power the laptop back on by clicking on the Laptop power button again.

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---


## **CS19541-COMPUTER NETWORKS-LAB RECORD**

With the wireless module installed, the next task is to connect the laptop to the wireless network.

Click on the **Desktop** tab at the top of the Laptop configuration window and select the **PC Wireless** icon.

Once the Wireless-N Notebook Adapter settings are visible, select the **Connect** tab. The wireless network “HomeNetwork” should be visible in the list of wireless networks as shown in the figure.

Select the network, and click on the **Connect** tab found below the **Site Information** pane.

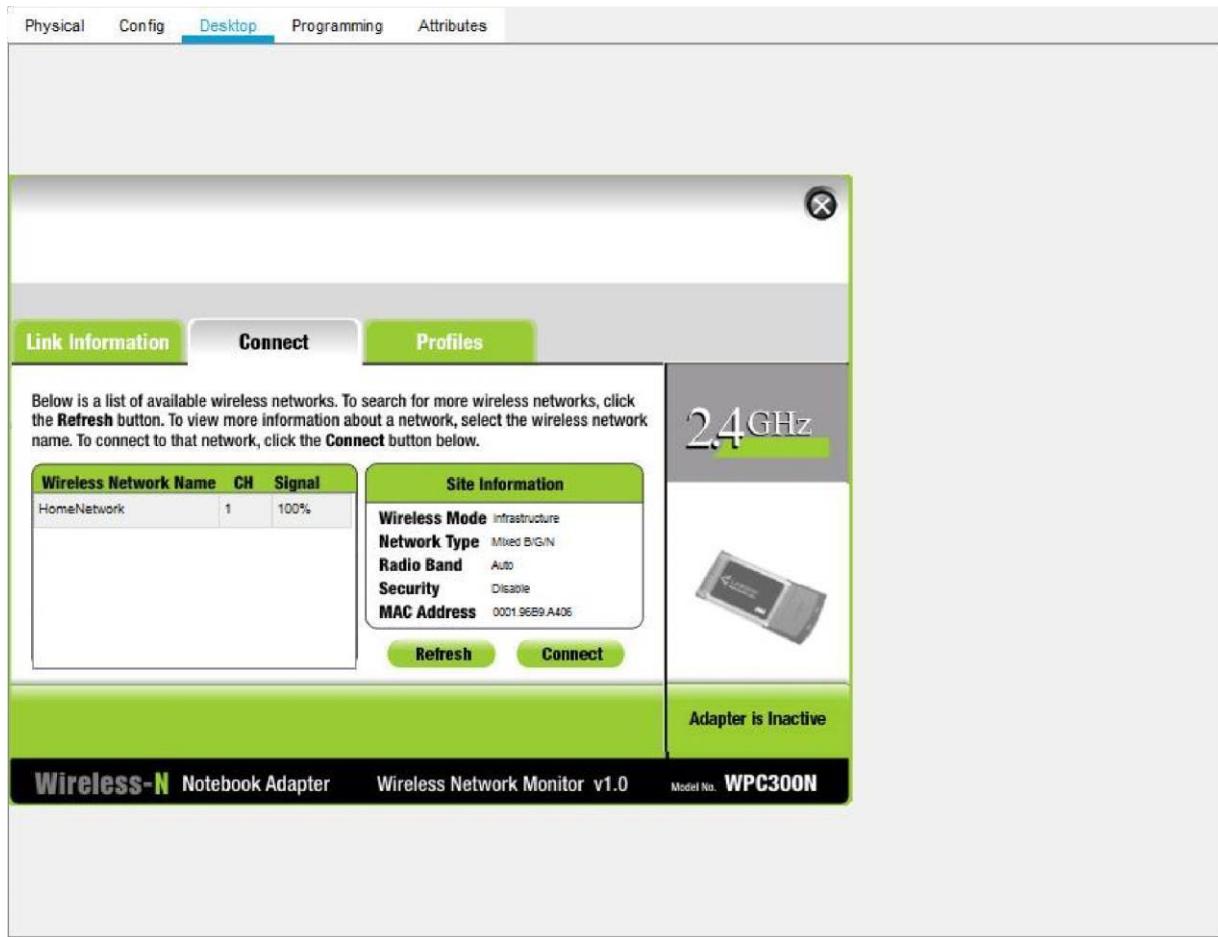

### **Step 3: Configure the PC**

- Configure the PC for the wired network


Click on the **PC** icon on the Packet Tracer **Logical** workspace and select the **Desktop** tab and then the **IP Configuration** icon.

In the IP Configuration window, select the **DCHP** radio button as shown in the figure so that the PC will use DCHP to receive an IPv4 address from the wireless router. Close the IP Configuration window.


**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

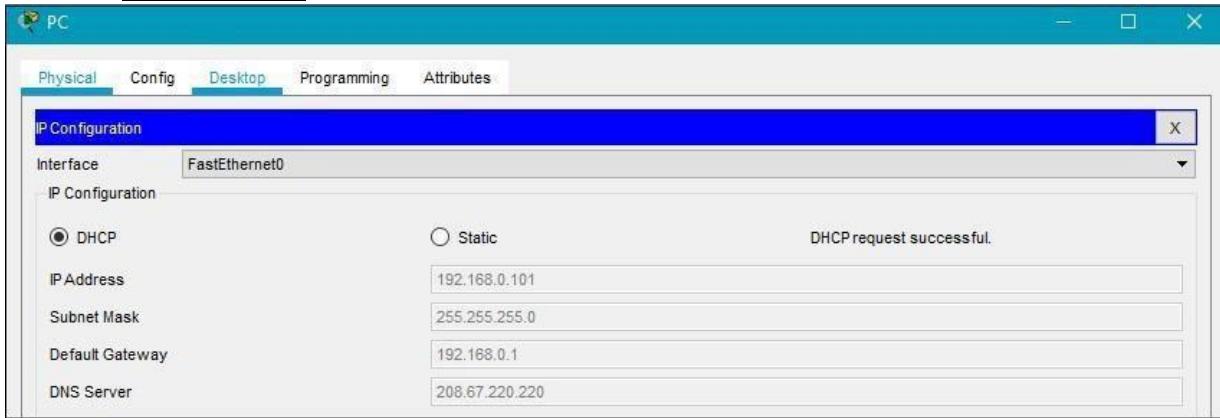

Click on the Command Prompt icon. Verify that the PC has received an IPv4 address by issuing the **ipconfig /all** command from the command prompt as shown in the figure. The PC should receive an IPv4 address in the 192.168.0.x range.

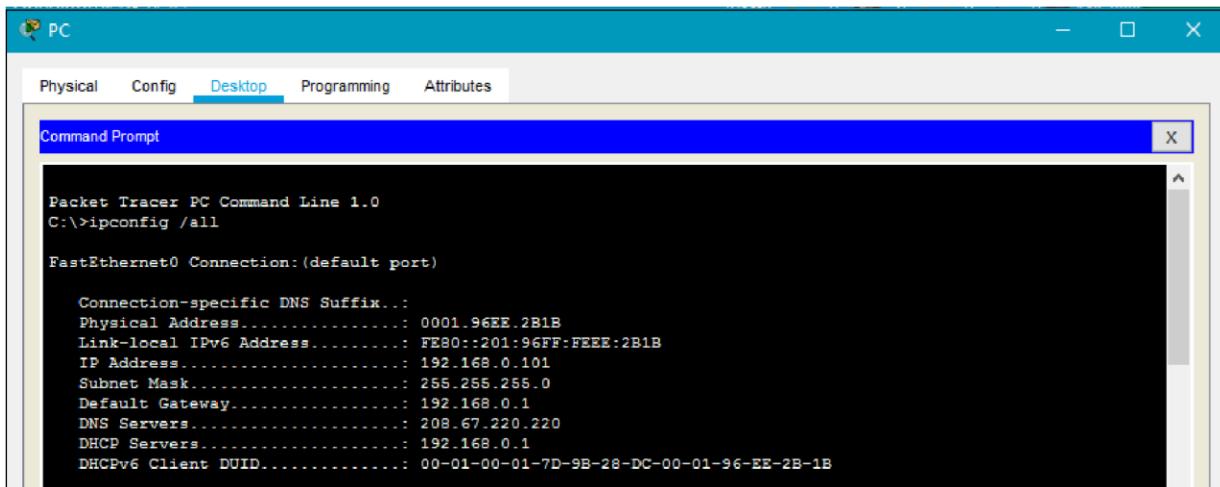

## **Step 4: Configure the Internet cloud**

- Install network modules if necessary

Click on the **Internet Cloud** icon on the Packet Tracer **Logical** workspace and then click on the **Physical** tab. The cloud device will need two modules if they are not already installed. The PT-CLOUD-NM-1CX which is for the cable modem service connection and the PT-CLOUD-NM-1CFE which is for a copper Ethernet cable connection. If these modules are missing, power off the physical cloud devices by clicking on the power button and drag each module to an empty module port on the device and then power the device back on.

- Identify the From and To Ports


Click on the **Config** tab in the Cloud device window. In the left pane click on **Cable** under **CONNECTIONS**. In the first drop down box choose Coaxial and in the second drop down box choose

Ethernet then click the **Add** button to add these as the **From Port** and **To Port** as shown in the figure.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**


---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

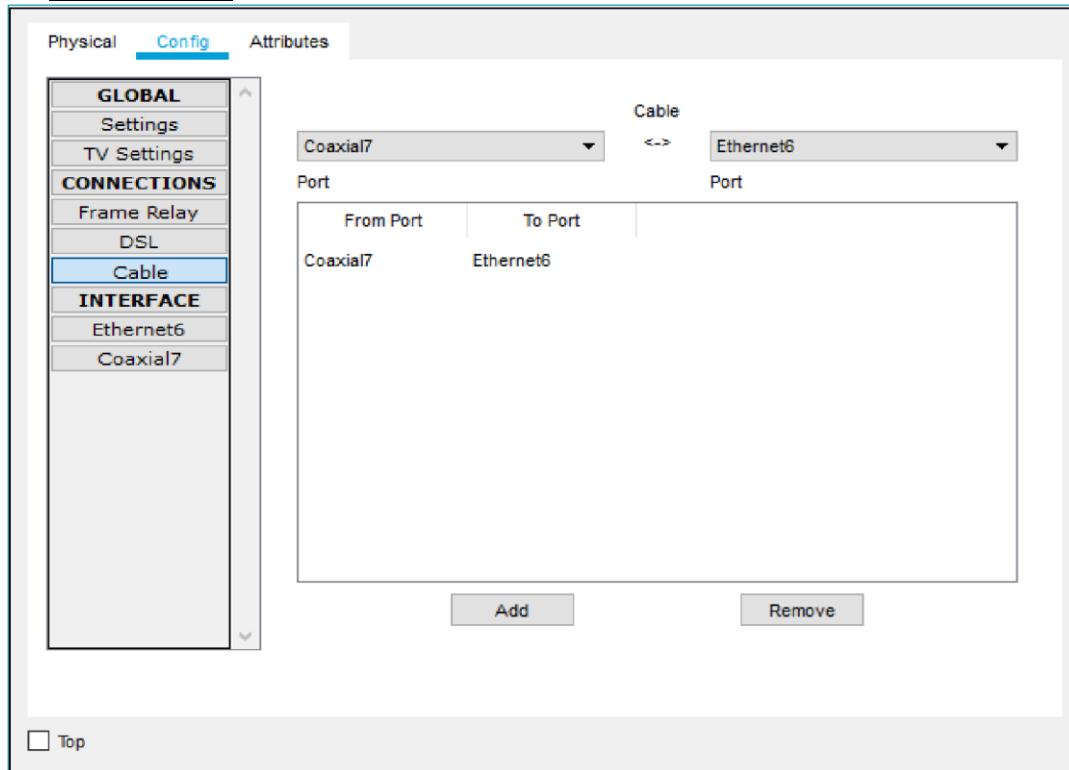

- c. Identify the type of provider

While still in the **Config** tab click Ethernet under **INTERFACE** in the left pane. In the Ethernet configuration window select **Cable** as the Provider Network as shown in the figure.

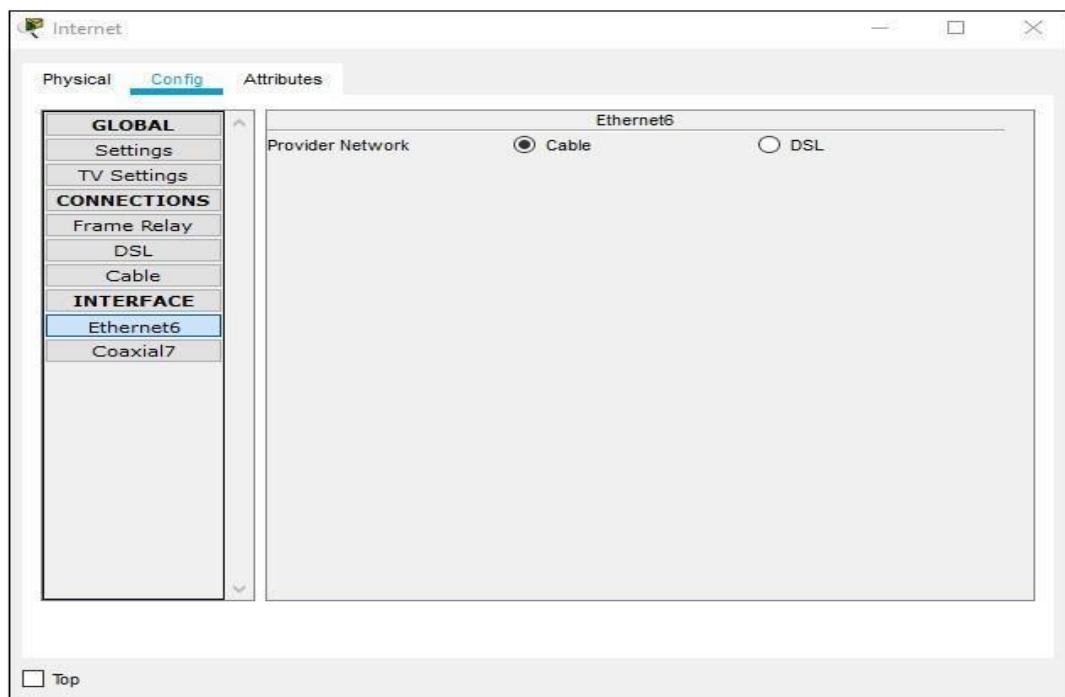

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

## **Step 5: Configure the Cisco.com server**


- a. Configure the Cisco.com server as a DHCP server

Click on the Cisco.com server icon on the Packet Tracer **Logical** workspace and select the **Services** tab. Select **DHCP** from the **SERVICES** list in the left pane.

In the DHCP configuration window, configure a DHCP as shown in the figure with the following settings.

- Click **On** to turn the DCHP service on
- Pool name: DHCPpool
- Default Gateway: 208.67.220.220
- DNS Server: 208.67.220.220
- Starting IP Address: 208.67.220.1
- Subnet Mask 255.255.255.0
- Maximum number of Users: 50

Click **Add** to add the pool

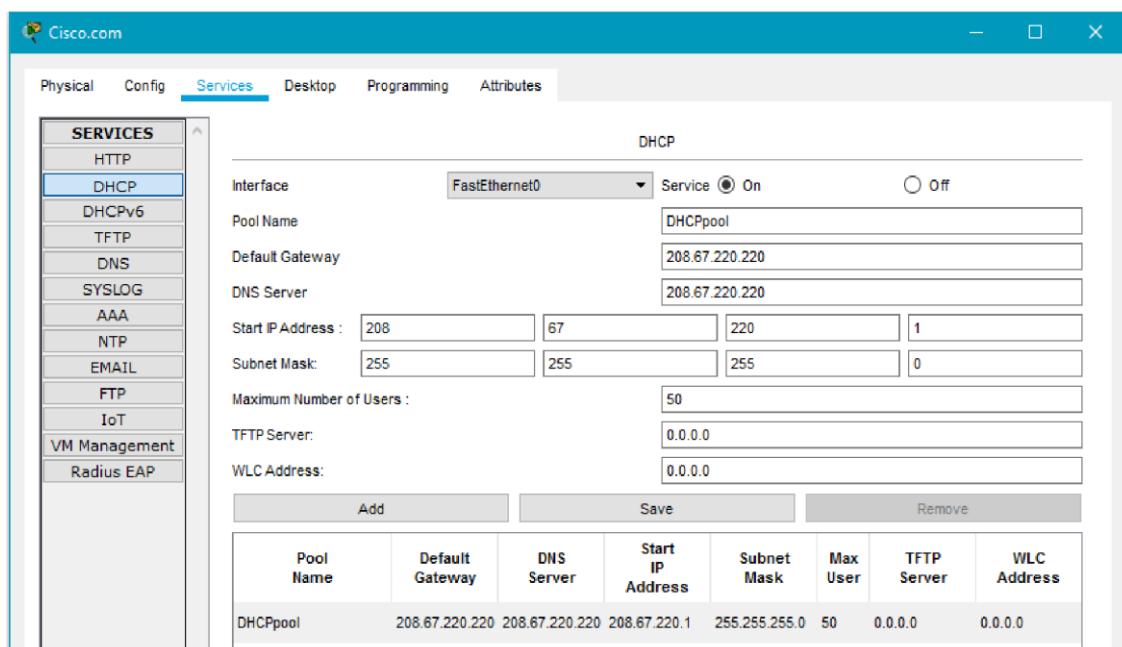

- b. Configure the Cisco.com server as a DNS server to provide domain name to IPv4 address resolution.

While still in the **Services** tab, select **DNS** from the **SERVICES** listed in the left pane.

Configure the DNS service using the following settings as shown in the figure.


- Click **On** to turn the DNS service on
- Name: Cisco.com
- Type: A Record
- Address: 208.67.220.220

Click **Add** to add the DNS service settings

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

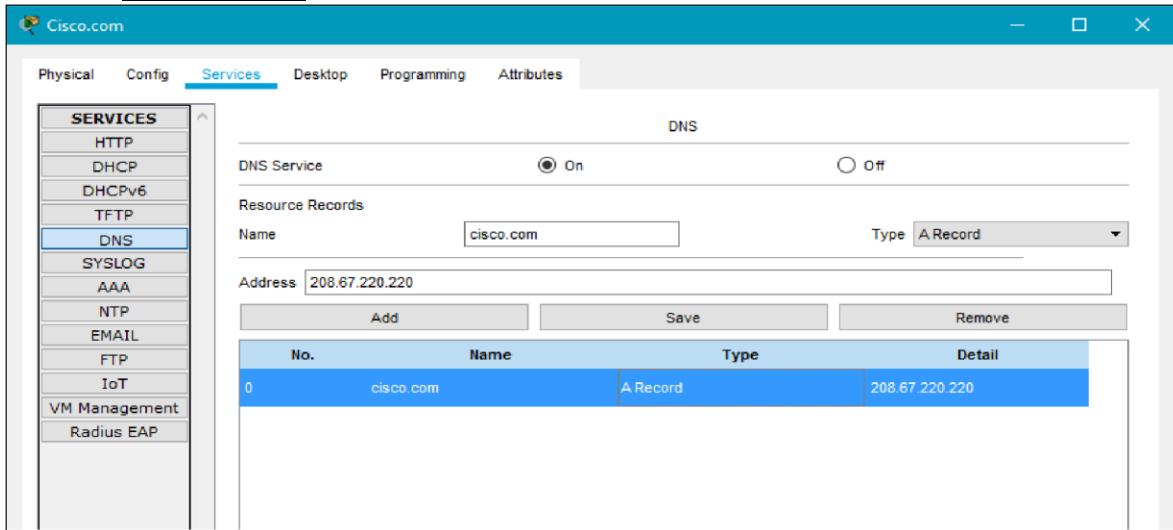


c. Configure the Cisco.com server Global settings.

Select the **Config** tab.

Click on **Settings** in left pane.

Configure the Global settings of the server as follows:

- Select **Static**
- Gateway: 208.67.220.1
- DNS Server: 208.67.220.220

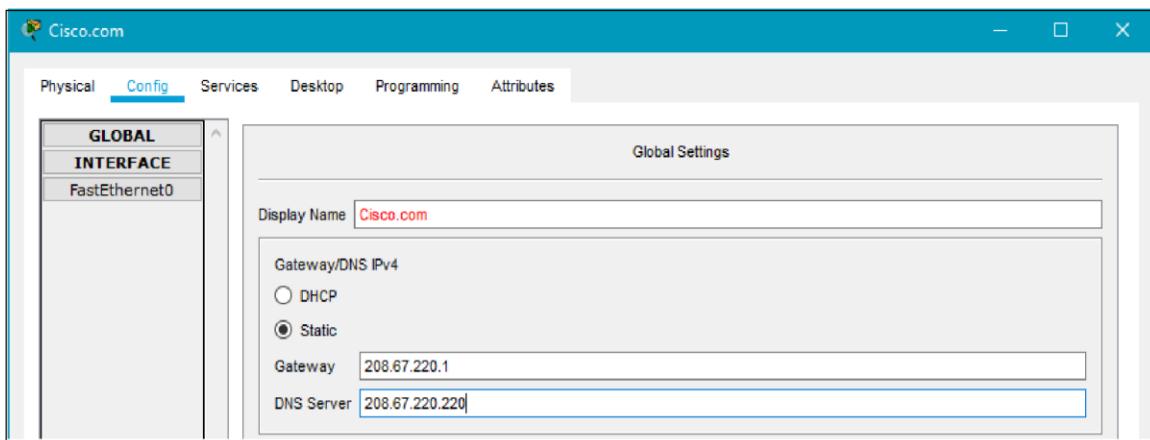

d. Configure the Cisco.com server FastEthernet0 Interface settings.

Click on **Fast Ethernet** in left pane of the **Config** tab


Configure the Fast Ethernet Interface settings of the server as follows:

- Select **Static** under IP Configuration
- IP Address: 208.67.220.220
- Subnet Mask: 255.255.255.0

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

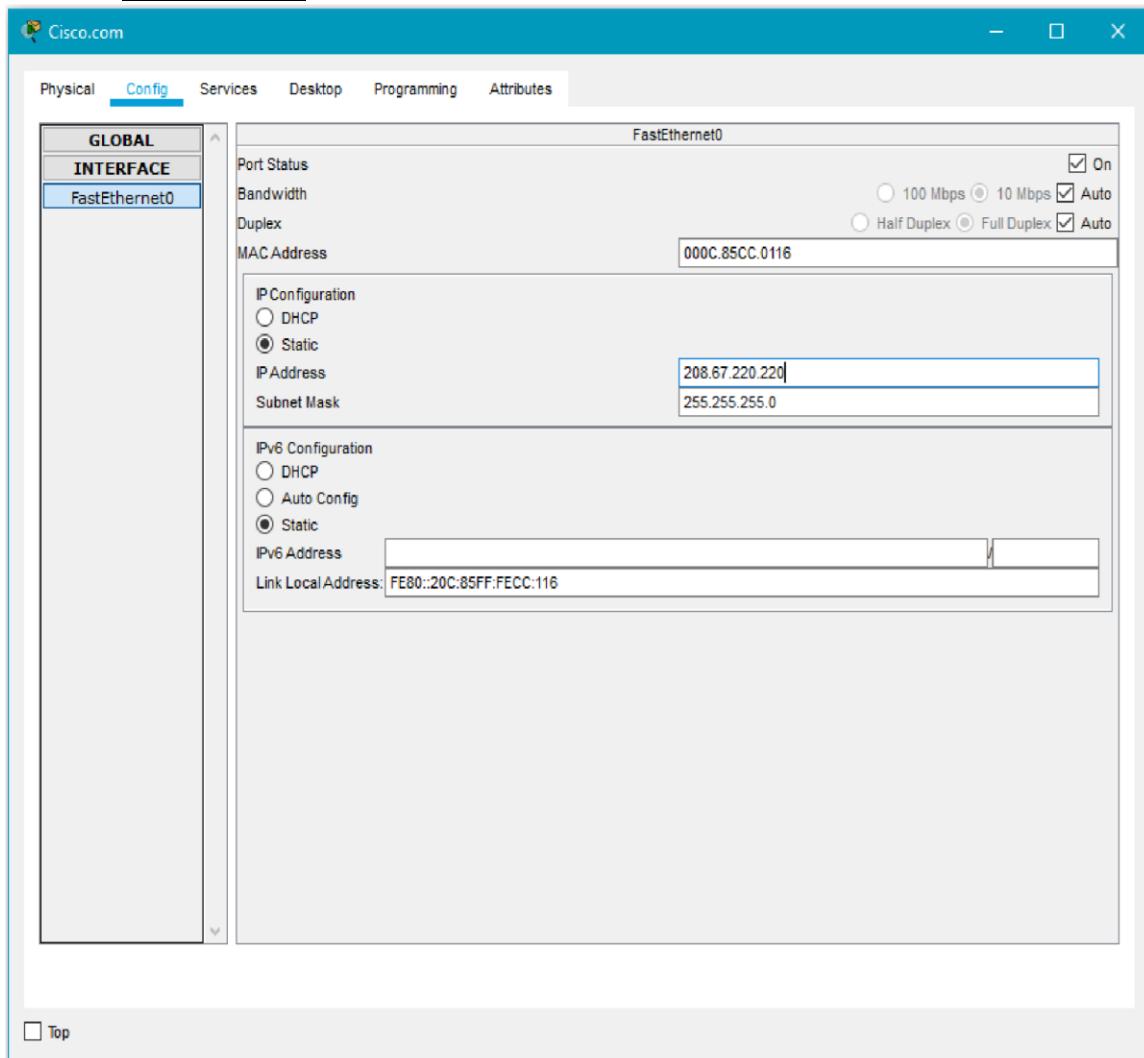

## Part 3: Verify Connectivity

### Step 1: Refresh the IPv4 settings on the PC

- Verify that the PC is receiving IPv4 configuration information from DHCP.

Click on the **PC** on the Packet Tracer **Logical** workspace and then select the **Desktop** tab of the PC configuration window.


Click on the **Command Prompt** icon

In the command prompt refresh the IP settings by issuing the commands **ipconfig /release** and then **ipconfig /renew**. The output should show that the PC has an IP address in the 192.168.0.x range, a subnet mask, a default gateway, and DNS server address as shown in the figure.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

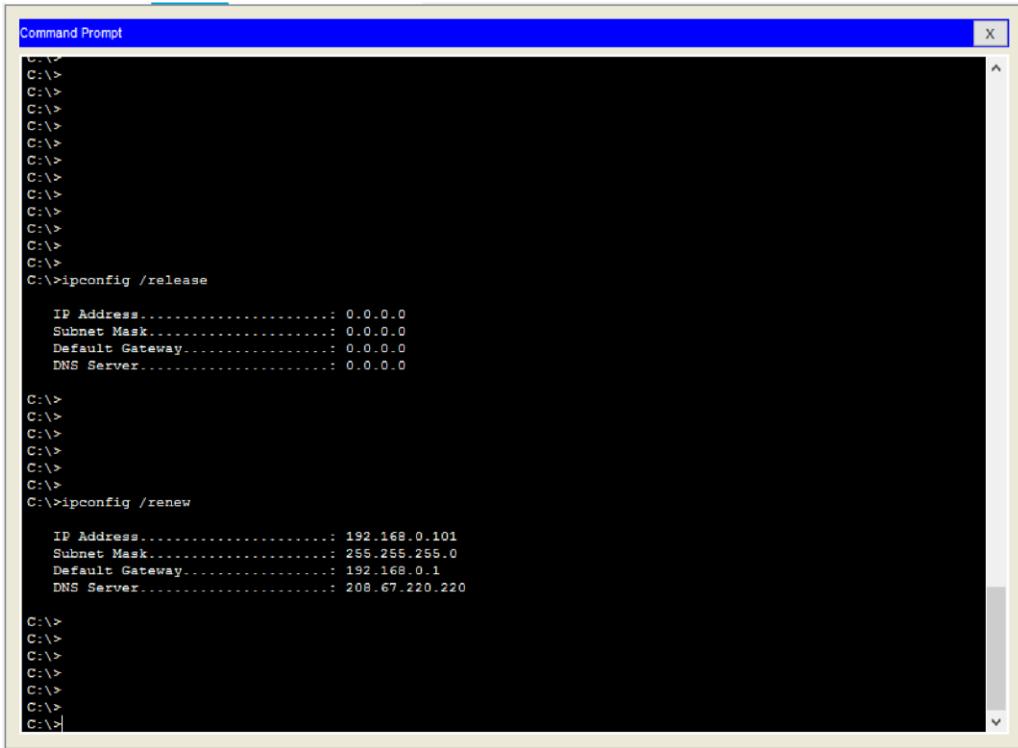

```
C:\>
C:\>ipconfig /release

IP Address.....: 0.0.0.0
Subnet Mask....: 0.0.0.0
Default Gateway.: 0.0.0.0
DNS Server.....: 0.0.0.0


C:\>
C:\>
C:\>
C:\>
C:\>
C:\>ipconfig /renew

IP Address.....: 192.168.0.101
Subnet Mask....: 255.255.255.0
Default Gateway.: 192.168.0.1
DNS Server.....: 208.67.220.220

C:\>
C:\>
C:\>
C:\>
C:\>
C:\>
```

- b) Test connectivity to the Cisco.com server from the PC

From the command prompt, issue the command **ping Cisco.com**. It may take a few seconds for the ping to return. Four replies should be received as shown in the figure.

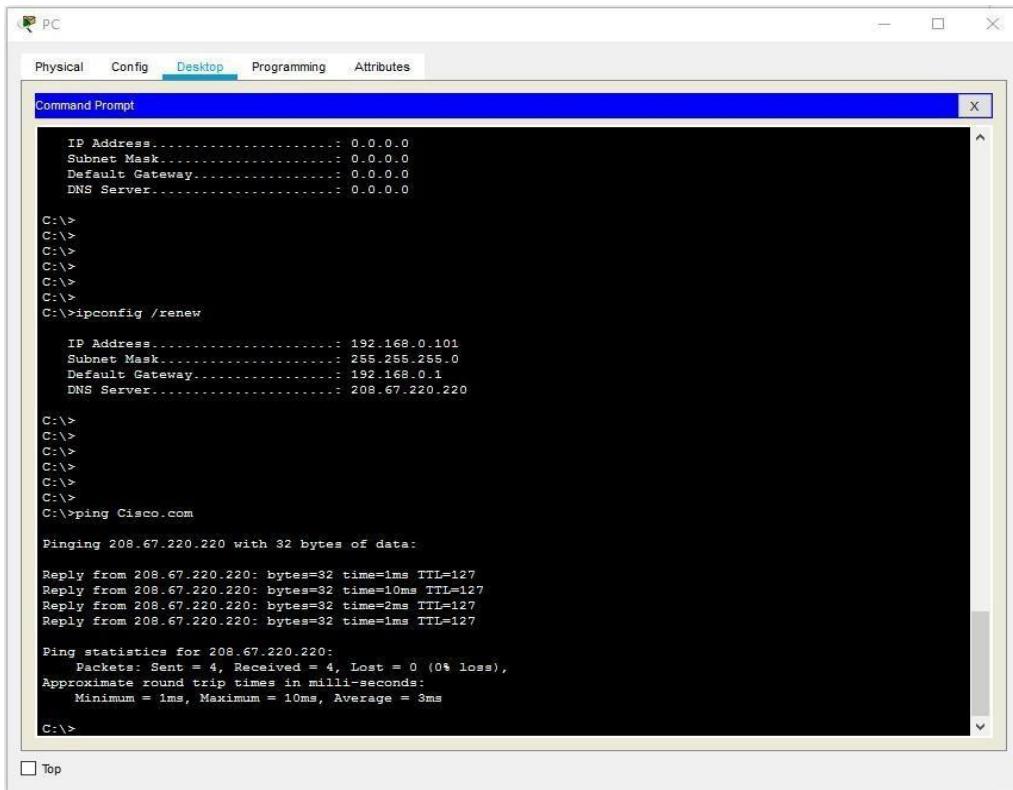

```
PC
Physical Config Desktop Programming Attributes

Command Prompt

IP Address.....: 0.0.0.0
Subnet Mask....: 0.0.0.0
Default Gateway.: 0.0.0.0
DNS Server.....: 0.0.0.0

C:\>
C:\>
C:\>
C:\>
C:\>
C:\>ipconfig /renew

IP Address.....: 192.168.0.101
Subnet Mask....: 255.255.255.0
Default Gateway.: 192.168.0.1
DNS Server.....: 208.67.220.220

C:\>
C:\>
C:\>
C:\>
C:\>
C:\>ping Cisco.com

Pinging 208.67.220.220 with 32 bytes of data:

Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=10ms TTL=127
Reply from 208.67.220.220: bytes=32 time=2ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127

Ping statistics for 208.67.220.220:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 10ms, Average = 3ms

C:\>
```

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB** **RECORD**

### **Student observation:**

1. Write down the key features of configuring Wireless router and DHCP server.
2. What is the significance of DHCP sever in internetworking.
3. Design and configure an inter-network in your lab using switch, router and Ethernet cables. Draw and label the design in your notebook. Also, show the ip address configuration of each and every device.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

## Practical 11


### **AIM:- a)Simulate Static Routing Configuration using CISCO Packet Tracer**

Static routes are the routes you manually add to the router's routing table. The process of adding static routes to the routing table is known as static routing. Let's take a packet tracer example to understand how to use static routing to create and add a static route to the routing table.

#### **Setting up a practice lab**

Create a packet tracer lab as shown in the following image or download the following pre-created lab and load it on Packet Tracer.

Packet Tracer Lab with Initial IP Configuration

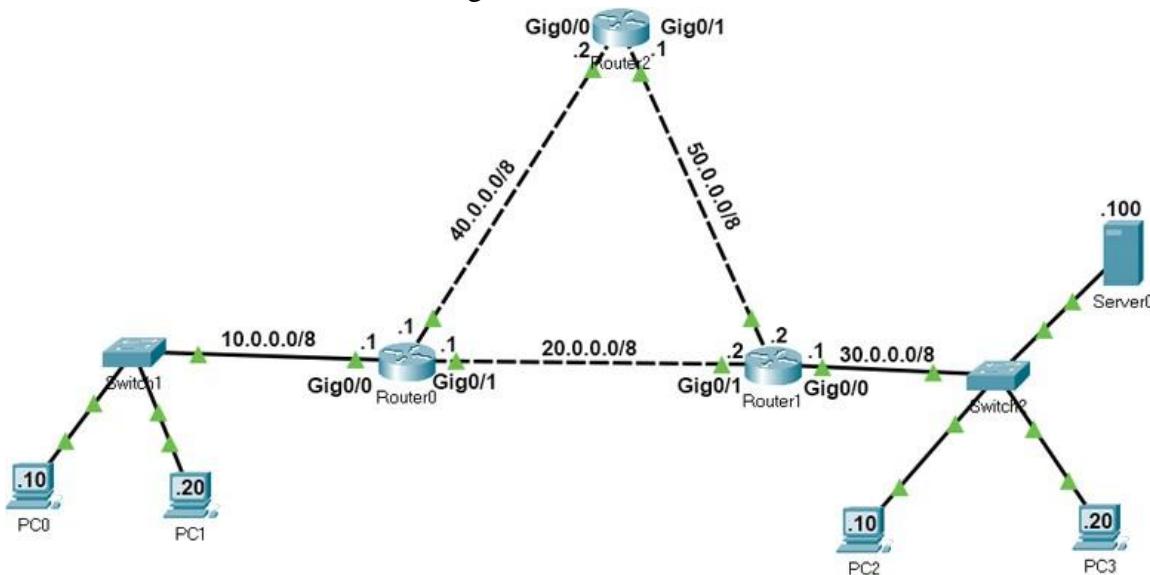

In this lab, each network has two routes to reach. We will configure one route as the main route and another route as the backup route. If the link bandwidth of all routes is the same, we use the route that has the least number of routers as the main route. If the link bandwidth and the number of routers are the same, we can use any route as the main route and another route as the backup route.

If we specify two routes for the same destination, the router automatically selects the best route for the destination and adds the route to the routing table. If you manually want to select a route that the router should add to the routing table, you have to set the AD value of the route lower than other routes. For example, if you use the following commands to create two static routes for network 30.0.0.8, the route will place the first route to the routing table.

```
#ip route 30.0.0.0 255.0.0.0 20.0.0.2 10  
#ip route 30.0.0.0 255.0.0.0 40.0.0.2 20
```

If the first route fails, the router automatically adds the second route to the routing table.

#### **Creating, adding, verifying static routes**

Routers automatically learn their connected networks. We only need to add routes for the networks that are not available on the router's interfaces. For example, network 10.0.0.0/8, 20.0.0.0/8 and 40.0.0.0/8 are directly connected to Router0. Thus, we don't need to configure routes for these

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

networks. Network 30.0.0.0/8 and network 50.0.0.0/8 are not available on Router0. We have to create and add routes only for these networks.

The following table lists the connected networks of each router.

Router	Available networks on local interfaces	Networks available on other routers' interfaces
Router0	10.0.0.0/8, 20.0.0.0/8, 40.0.0.0/8	30.0.0.0/8, 50.0.0.0/8
Router1	20.0.0.0/8, 30.0.0.0/8, 50.0.0.0/8	10.0.0.0/8, 40.0.0.0/8
Router2	40.0.0.0/8, 50.0.0.0/8	10.0.0.0/8, 20.0.0.0/8, 30.0.0.0/8

Let's create static routes on each router for networks that are not available on the router.

### ***Router0 requirements***

- Create two routes for network 30.0.0.0/8 and configure the first route (via -Router1) as the main route and the second route (via-Router2) as a backup route.
- Create two routes for the host 30.0.0.100/8 and configure the first route (via -Router2) as the main route and the second route (via-Router1) as a backup route.
- Create two routes for network 50.0.0.0/8 and configure the first route (via -Router2) as the main route and the second route (via-Router1) as a backup route.
- Verify the router adds only main routes to the routing table.

### ***Router0 configuration***

Access the CLI prompt of Router0 and run the following commands.

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2 10
Router(config)#ip route 30.0.0.0 255.0.0.0 40.0.0.2 20
Router(config)#ip route 30.0.0.100 255.255.255.255 40.0.0.2 10
Router(config)#ip route 30.0.0.100 255.255.255.255 20.0.0.2 20
Router(config)#ip route 50.0.0.0 255.0.0.0 40.0.0.2 10
Router(config)#ip route 50.0.0.0 255.0.0.0 20.0.0.2 20
Router(config)#exit
Router#show ip route static
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
S 30.0.0.0/8 [10/0] via 20.0.0.2
S 30.0.0.100/32 [10/0] via 40.0.0.2
S 50.0.0.0/8 [10/0] via 40.0.0.2
Router#
```

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB RECORD**

Router0

Physical Config **CLI** Attributes

IOS Command Line Interface

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2 10 Primary route
Router(config)#ip route 30.0.0.0 255.0.0.0 40.0.0.2 20 Backup route
Router(config)#ip route 30.0.0.100 255.255.255.255 40.0.0.2 10 Primary route
Router(config)#ip route 30.0.0.100 255.255.255.255 20.0.0.2 20 Backup route
Router(config)#ip route 50.0.0.0 255.0.0.0 40.0.0.2 10 Primary route
Router(config)#ip route 50.0.0.0 255.0.0.0 20.0.0.2 20 Backup route
Router(config)#exit
Router#show ip route static
  30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
S      30.0.0.0/8 [10/0] via 20.0.0.2
S      30.0.0.100/32 [10/0] via 40.0.0.2
S      50.0.0.0/8 [10/0] via 40.0.0.2
Router#
```

### ***Router1 requirements***

- Create two routes for network 10.0.0.0/8 and configure the first route (via -Router0) as the main route and the second route (via-Router1) as a backup route.
- Create two routes for network 40.0.0.0/8 and configure the first route (via -Router0) as the main route and the second route (via-Router2) as a backup route.
- Verify the router adds only main routes to the routing table.

### ***Router1 configuration***

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1 10
Router(config)#ip route 10.0.0.0 255.0.0.0 50.0.0.1 20
Router(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.1 10
Router(config)#ip route 40.0.0.0 255.0.0.0 50.0.0.1 20
Router(config)#exit
Router#show ip route static
S 10.0.0.0/8 [10/0] via 20.0.0.1
S 40.0.0.0/8 [10/0] via 20.0.0.1
Router#
```

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB

## RECORD

Router1

Physical Config **CLI** Attributes

IOS Command Line Interface

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1 10 main route
Router(config)#ip route 10.0.0.0 255.0.0.0 50.0.0.1 20 backup route
Router(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.1 10 main route
Router(config)#ip route 40.0.0.0 255.0.0.0 50.0.0.1 20 backup route
Router(config)#exit
Router#show ip route static
S    10.0.0.0/8 [10/0] via 20.0.0.1 } Only main routes are
S    40.0.0.0/8 [10/0] via 20.0.0.1 } added to the routing table.

Router#
```

### ***Router2 requirements***

Create static routes for network 10.0.0.0/8 and network 30.0.0.0/8 and verify the router adds both routes to the routing table.


### ***Router2 configuration***

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 10.0.0.0 255.0.0.0 40.0.0.1
Router(config)#ip route 30.0.0.0 255.0.0.0 50.0.0.2
Router(config)#exit
Router#show ip route static
S 10.0.0.0/8 [1/0] via 40.0.0.1
S 30.0.0.0/8 [1/0] via 50.0.0.2
Router#
```

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

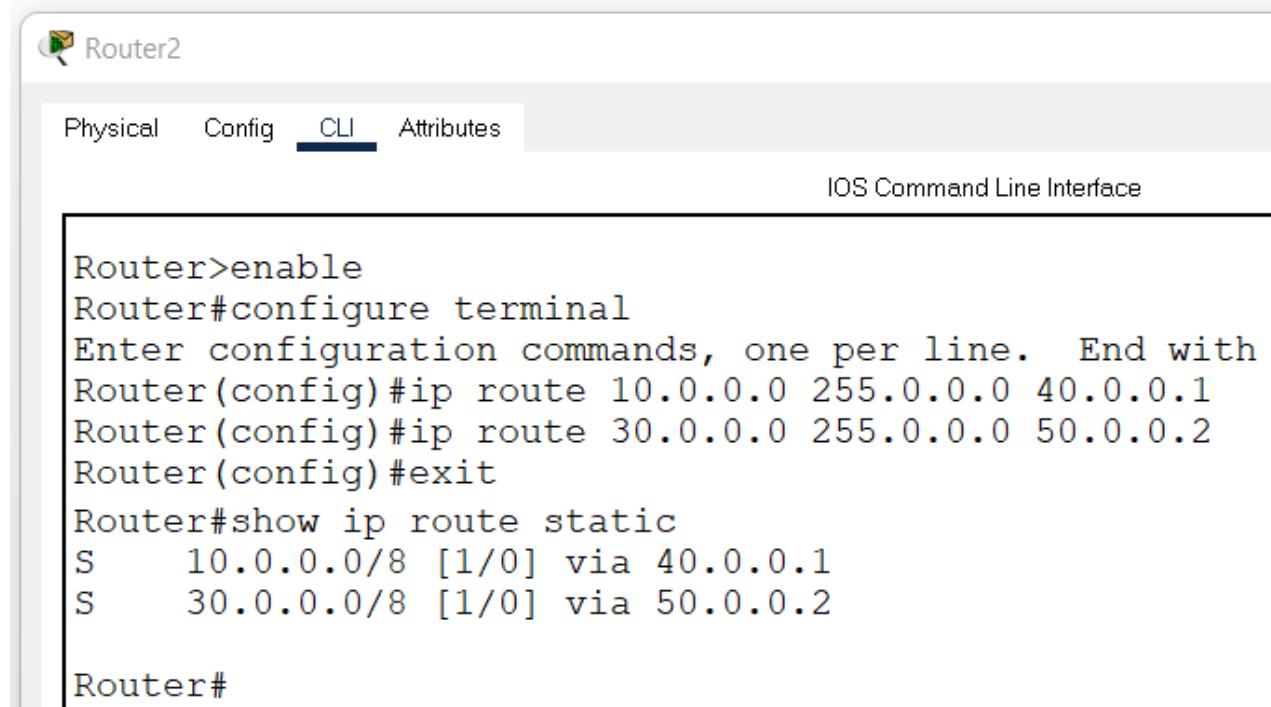

Router2

Physical Config **CLI** Attributes

IOS Command Line Interface

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with
Router(config)#ip route 10.0.0.0 255.0.0.0 40.0.0.1
Router(config)#ip route 30.0.0.0 255.0.0.0 50.0.0.2
Router(config)#exit
Router#show ip route static
S    10.0.0.0/8 [1/0] via 40.0.0.1
S    30.0.0.0/8 [1/0] via 50.0.0.2

Router#
```

### **Verifying static routing**

On Router0, we configured two routes for network 30.0.0.0/8. These routes are via Router1 and via Router2. We set the first route (via-Router1) as the main route and the second route as the backup route. We can verify this configuration in two ways.

By sending ping requests to a PC of network 30.0.0.0/8 and tracing the path they take to reach the network 30.0.0.0/8. For this, you can use '**tracert**' command on a PC of network 10.0.0.0/8. The '**tracert**' command sends ping requests to the destination host and tracks the path they take to reach the destination.


By listing the routing table entries on Router0. Since a router uses the routing table to forward data packets, you can check the routing table to figure out the route the router uses to forward data packets for each destination.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

The following image shows the above testing.

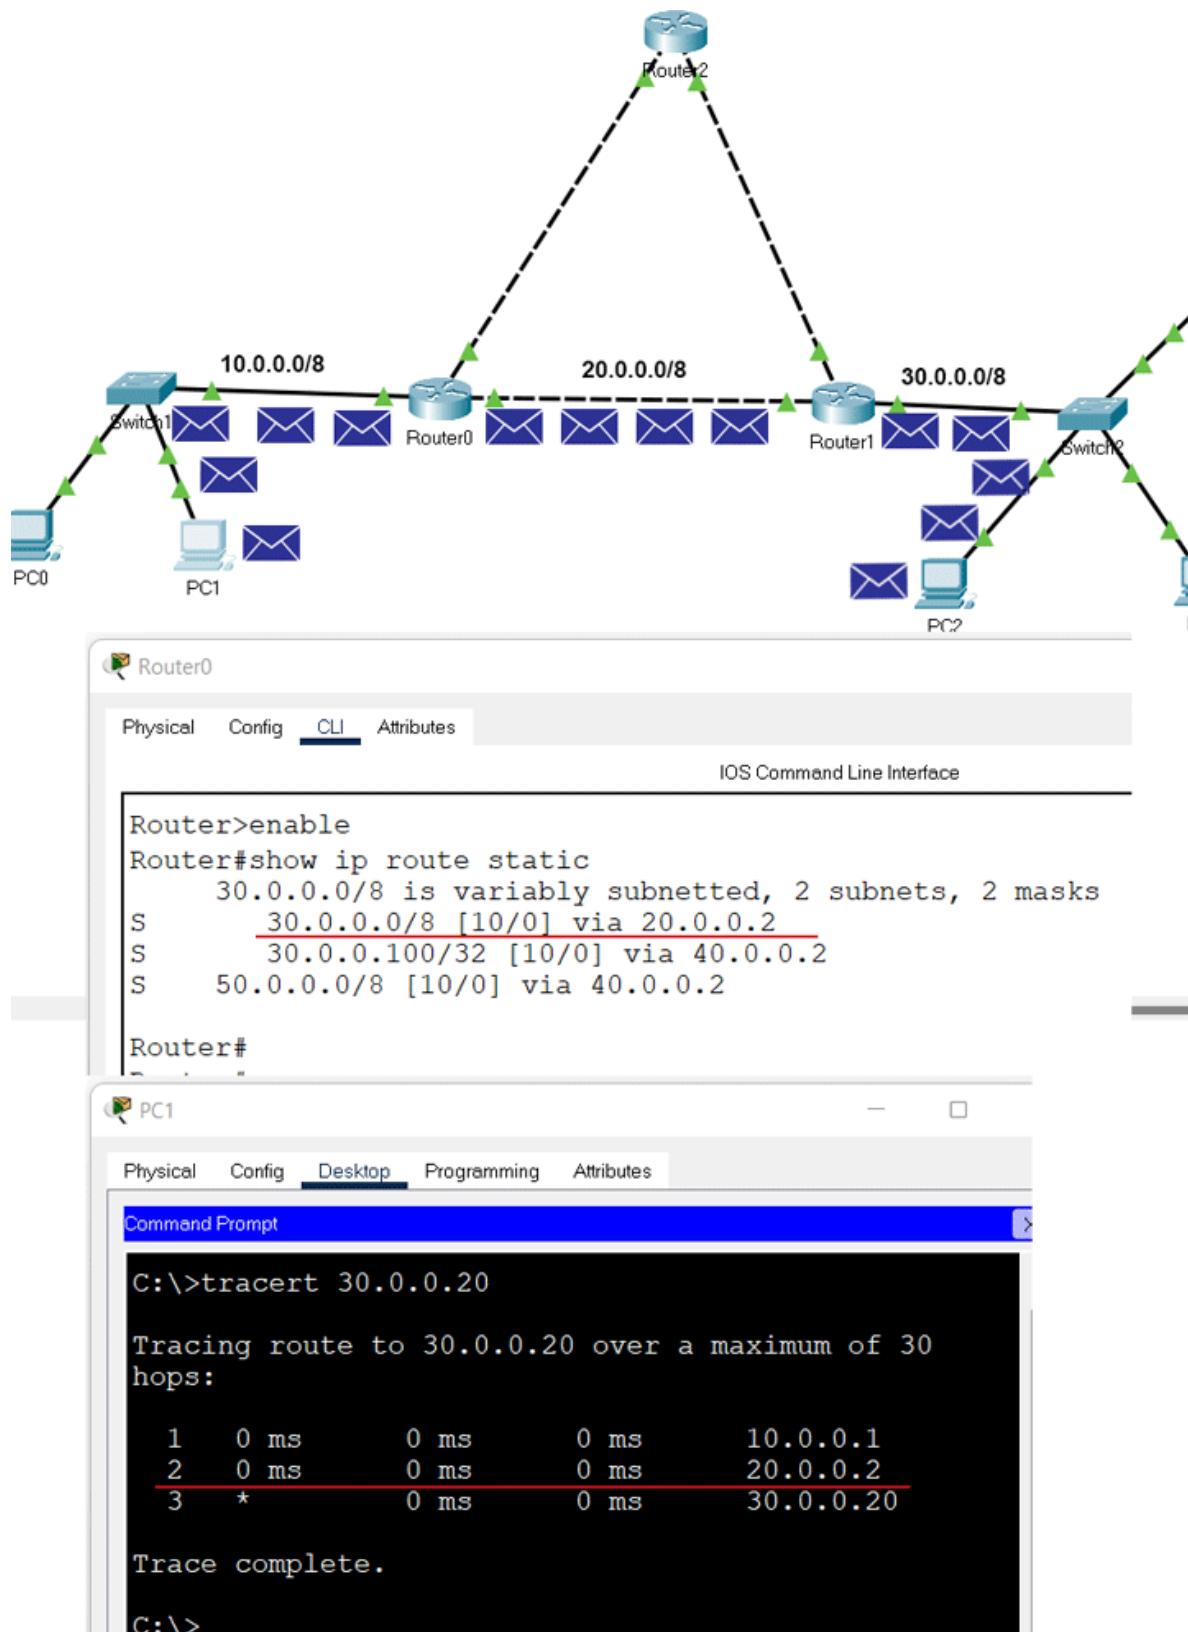


**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

## CS19541-COMPUTER NETWORKS-LAB RECORD

We also configured a separate static host route for the host 30.0.0.100/8. The router must use this route to forward data packets to the host 30.0.0.100/8. To verify this, you can do the same testing for the host 30.0.0.100/8.

The following image shows this testing.

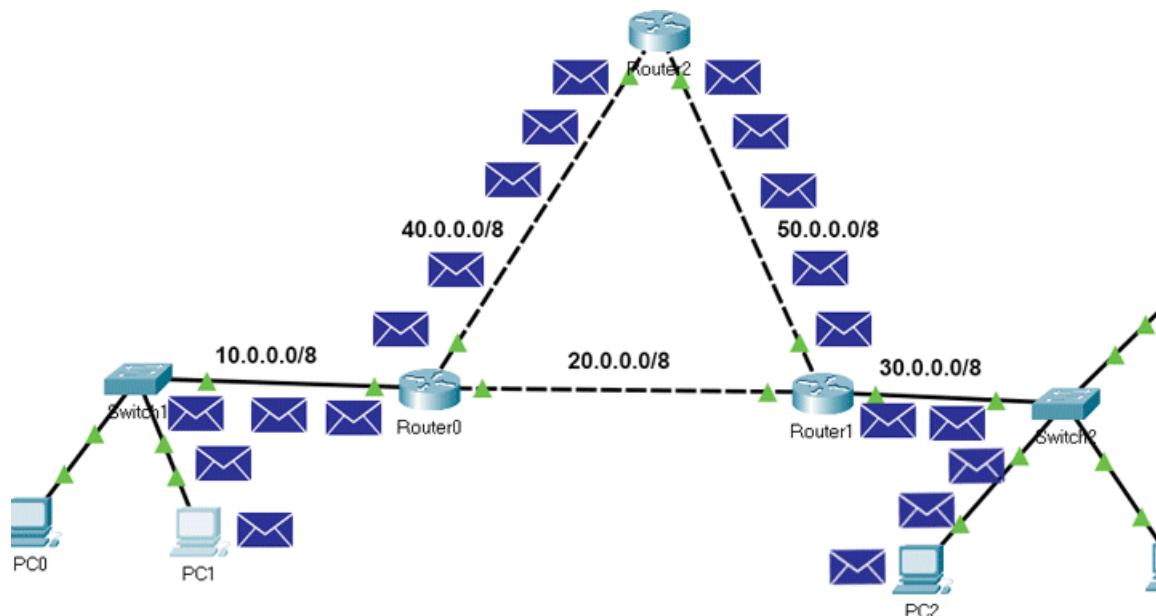

Router0

Physical	Config	CLI	Attributes
----------	--------	-----	------------

IOS Command Line Interface

```
Router>enable
Router#show ip route static
      30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
S        30.0.0.0/8 [10/0] via 20.0.0.2
S        30.0.0.100/32 [10/0] via 40.0.0.2
S        50.0.0.0/8 [10/0] via 40.0.0.2
```

PC1

Physical	Config	Desktop	Programming	Attributes
----------	--------	---------	-------------	------------

Packet Tracer PC Command Line 1.0  
C:\>tracert 30.0.0.100

```
Tracing route to 30.0.0.100 over a maximum of 30 hops:
  1  1 ms          0 ms          0 ms      10.0.0.1
  2  *            0 ms          0 ms      40.0.0.2
  3  *            *            0 ms      20.0.0.2
  4  *            0 ms          0 ms      30.0.0.100

Trace complete.
```


## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

We also configured a backup route for network 30.0.0.0/8. The router must put the backup route to the routing table and use it to forward data packets to network 30.0.0.0/8 when the main route fails. To verify this, we have to simulate the failure of the main route.

To simulate the failure of the main route, you can delete the link between Router0 and Router1. After deleting the link, do the same testing again for the network 30.0.0.0/8.

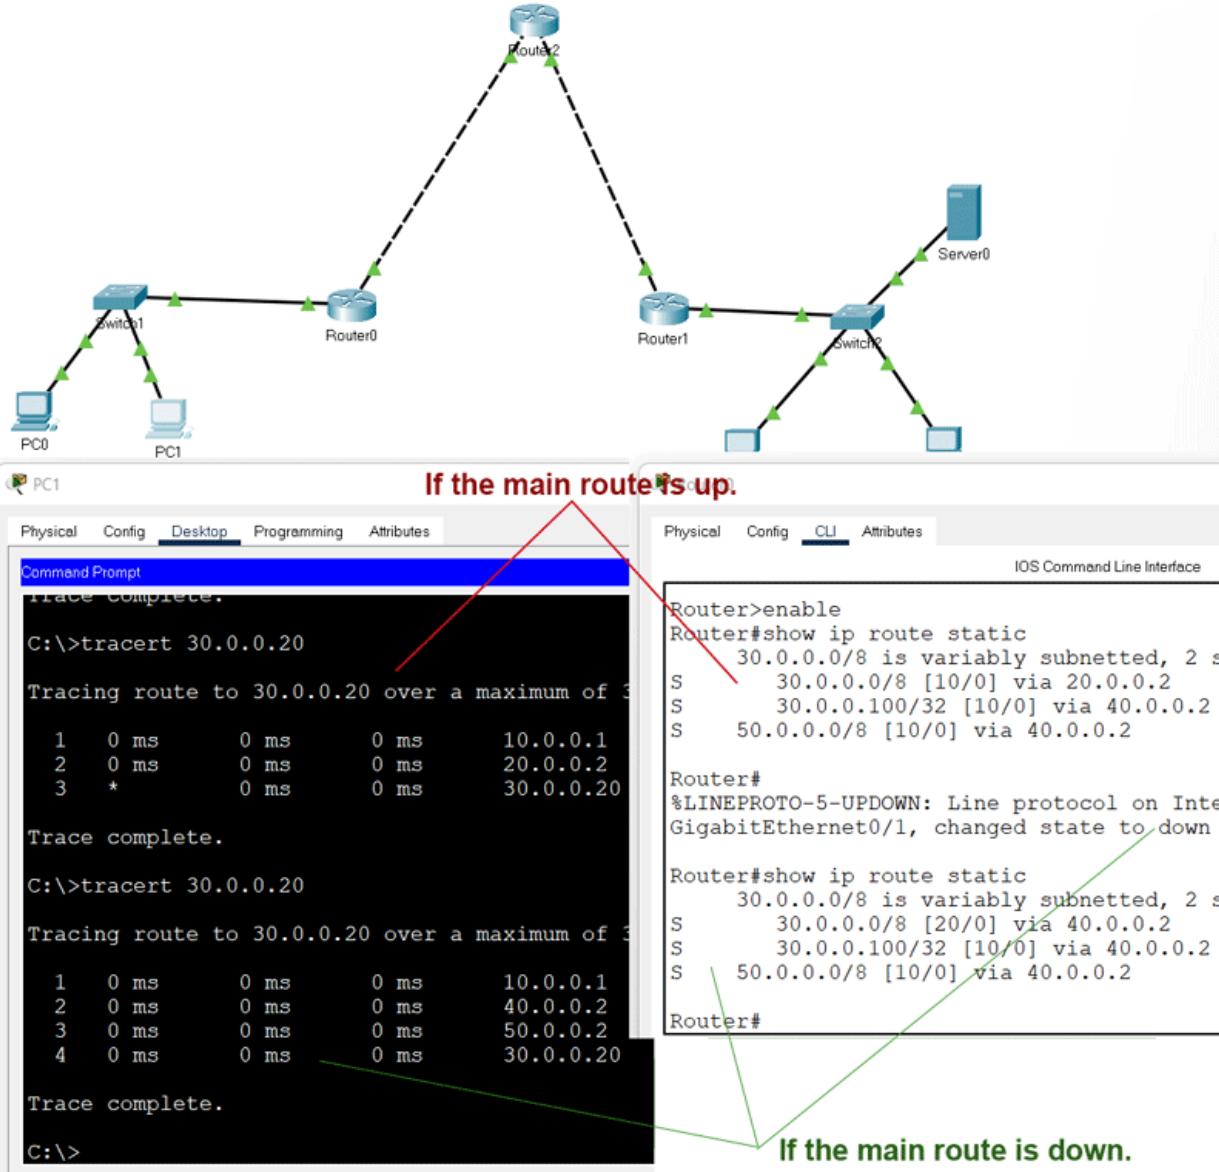

The following link provides the configured packet tracer lab of the above example.

Packet Tracer Lab with Static Routing Configuration

## **Deleting a static route**

To delete a static route, use the following steps.

- Use the '**show ip route static**' command to print all static routes.
- Note down the route you want to delete.
- Use the '**no ip route**' command to delete the route.

If you have a backup route, the backup route becomes the main route when you delete the main route.

In our example, we have a backup route and a main route for the host 30.0.0.100/8. The following image shows how to delete both routes.

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB RECORD

Router0

Physical Config **CLI** Attributes

IOS Command Line Interface

```
Router>enable
Router#show ip route static
  30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
S      30.0.0.0/8 [10/0] via 20.0.0.2
S      30.0.0.100/32 [10/0] via 40.0.0.2 The main route that we want to delete.
S      50.0.0.0/8 [10/0] via 40.0.0.2

Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#no ip route 30.0.0.100 255.255.255.255 40.0.0.2
Router(config)#exit          Deleting the main route
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route static
  30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
S      30.0.0.0/8 [10/0] via 20.0.0.2
S      30.0.0.100/32 [20/0] via 20.0.0.2 As soon as we remove the main route, the router changes the backup route to the main route.
S      50.0.0.0/8 [10/0] via 40.0.0.2

Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#no ip route 30.0.0.100 255.255.255.255 20.0.0.2
Router(config)#exit          Deleting the new main route
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route static
S      30.0.0.0/8 [10/0] via 20.0.0.2
S      50.0.0.0/8 [10/0] via 40.0.0.2 All routes to host 30.0.0.100/8 have been removed.
Router#
```

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB**

## **RECORD**

### **Practical 11**

#### **AIM:- b)Simulate RIP using CISCO Packet Tracer**

##### **Initial IP configuration**

Device	Interface	IP Configuration	Connected with
PC0	Fast Ethernet	10.0.0.2/8	Router0's Fa0/1
Router0	Fa0/1	10.0.0.1/8	PC0's Fast Ethernet
Router0	S0/0/1	192.168.1.254/30	Router2's S0/0/1
Router0	S0/0/0	192.168.1.249/30	Router1's S0/0/0
Router1	S0/0/0	192.168.1.250/30	Router0's S0/0/0
Router1	S0/0/1	192.168.1.246/30	Router2's S0/0/0
Router2	S0/0/0	192.168.1.245/30	Router1's S0/0/1
Router2	S0/0/1	192.168.1.253/30	Router0's S0/0/1
Router2	Fa0/1	20.0.0.1/30	PC1's Fast Ethernet
PC1	Fast Ethernet	20.0.0.2/30	Router2's Fa0/1

##### **Assign IP address to PCs**

Double click **PCs** and click **Desktop** menu item and click **IP Configuration**. Assign IP address referring the above table.

##### **Assign IP address to interfaces of routers**

Double click **Router0** and click **CLI** and press **Enter key** to access the command prompt of **Router0**.

We need to configure IP address and other parameters on interfaces before we could actually use them for routing. Interface mode is used to assign IP address and other parameters. Interface mode can be accessed from global configuration mode. Following commands are used to access the global configuration mode.

```
Router>enable  
Router#configure terminal  
Enter configuration commands, one per line. End with CNTL/Z.  
Router(config)#
```

From global configuration mode we can enter in interface mode. From there we can configure the interface. Following commands will assign IP address on FastEthernet0/0.

```
Router(config)#interface fastEthernet 0/0  
Router(config-if)#ip address 10.0.0.1 255.0.0.0  
Router(config-if)#no shutdown  
Router(config-if)#exit  
Router(config)#
```

**interface fastEthernet 0/0** command is used to enter in interface mode.  
**ip address 10.0.0.1 255.0.0.0** command will assign IP address to interface.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

**no shutdown** command will bring the interface up.

**exit** command is used to return in global configuration mode.

Serial interface needs two additional parameters **clock rate** and **bandwidth**. Every serial cable has two ends DTE and DCE. These parameters are always configured at DCE end.

We can use **show controllers interface** command from privilege mode to check the cable's end.

```
Router#show controllers serial 0/0/0
Interface Serial0/0/0
Hardware is PowerQUICC MPC860
DCE V.35, clock rate 2000000
[Output omitted]
```

Fourth line of output confirms that DCE end of serial cable is attached. If you see DTE here instead of DCE skip these parameters.

Now we have necessary information let's assign IP address to serial interface.

```
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface serial 0/0/0
Router(config-if)#ip address 192.168.1.249 255.255.255.252
Router(config-if)#clock rate 64000
Router(config-if)#bandwidth 64
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#interface serial 0/0/1
Router(config-if)#ip address 192.168.1.254 255.255.255.252
Router(config-if)#clock rate 64000
Router(config-if)#bandwidth 64
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#[
```

**Router#configure terminal** Command is used to enter in global configuration mode.

**Router(config)#interface serial 0/0/0** Command is used to enter in interface mode.

**Router(config-if)#ip address 192.168.1.249 255.255.255.252** Command assigns IP address to interface. For serial link we usually use IP address from /30 subnet.

**Router(config-if)#clock rate 64000** And **Router(config-if)#bandwidth 64** In real life environment these parameters control the data flow between serial links and need to be set at service providers end. In lab environment we need not to worry about these values. We can use these values.

**Router(config-if)#no shutdown** Command brings interface up.

**Router(config-if)#exit** Command is used to return in global configuration mode.

We will use same commands to assign IP addresses on interfaces of remaining routers. We need to provided clock rate and bandwidth only on DCE side of serial interface. Following command will assign IP addresses on interface of Router1.

**Router1**

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

```
Router>enable  
Router#configure terminal  
Enter configuration commands, one per line. End with CNTL/Z.  
Router(config)#interface serial 0/0/0  
Router(config-if)#ip address 192.168.1.250 255.255.255.252
```

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

```
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#interface serial 0/0/1
Router(config-if)#ip address 192.168.1.246 255.255.255.252
Router(config-if)#clock rate 64000
Router(config-if)#bandwidth 64
Router(config-if)#no shutdown
Router(config-if)#exit
```

Use same commands to assign IP addresses on interfaces of Router2.

### **Router2**

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fastEthernet 0/0
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#interface serial 0/0/0
Router(config-if)#ip address 192.168.1.245 255.255.255.252
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#interface serial 0/0/1
Router(config-if)#ip address 192.168.1.253 255.255.255.252
Router(config-if)#no shutdown
Router(config-if)#exit
```

Now routers have information about the networks that they have on their own interfaces. Routers will not exchange this information between them on their own. We need to implement RIP routing protocol that will insist them to share this information.

### **Configure RIP routing protocol**

Configuration of RIP protocol is much easier than you think. It requires only two steps to configure the RIP routing.

- Enable RIP routing protocol from global configuration mode.
- Tell RIP routing protocol which networks you want to advertise.

Let's configure it in Router0

### **Router0**

```
Router0(config)#router rip
Router0(config-router)# network 10.0.0.0
Router0(config-router)# network 192.168.1.252
Router0(config-router)# network 192.168.1.248
```

**router rip** command tell router to enable the RIP routing protocol.

**network** command allows us to specify the networks which we want to advertise. We only need to specify the networks which are directly connected with the router.

That's all we need to configure the RIP. Follow same steps on remaining routers.

### **Router1**

```
Router1(config)#router rip
Router1(config-router)# network 192.168.1.244
Router1(config-router)# network 192.168.1.248
```

### **Router2**

```
Router2(config)#router rip
```

## **CS19541-COMPUTER NETWORKS-LAB RECORD**

```
Router2(config-router)# network 20.0.0.0
Router2(config-router)# network 192.168.1.252
Router2(config-router)# network 192.168.1.244
```

That's it. Our network is ready to take the advantage of RIP routing. To verify the setup we will use ping command. ping command is used to test the connectivity between two devices.

Access the command prompt of **PC1** and use *ping* command to test the connectivity from **PC0**.

The screenshot shows a terminal window titled "Command Prompt". The output of the command "ping 10.0.0.2" is displayed. It shows the request timed out, three replies from the target IP, and the ping statistics. The statistics indicate 4 packets sent, 3 received, and 1 lost.

```
Packet Tracer PC Command Line 1.0
PC>ipconfig

FastEthernet0 Connection: (default port)
Link-local IPv6 Address.....: FE80::260:70FF%1
IP Address.....: 20.0.0.2
Subnet Mask.....: 255.0.0.0
Default Gateway.....: 20.0.0.1

PC>ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:

Request timed out.
Reply from 10.0.0.2: bytes=32 time=3ms TTL=126
Reply from 10.0.0.2: bytes=32 time=3ms TTL=126
Reply from 10.0.0.2: bytes=32 time=3ms TTL=126

Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (2%
Approximate round trip times in milli-seconds:
    Minimum = 3ms, Maximum = 3ms, Average = 3ms

PC>
```

RIP protocol automatically manage all routes for us. If one route goes down, it automatically switches to another available. To explain this process more clearly we have added one more route in our network.

Currently there are two routes between PC0 and PC1.

### **Route 1**

PC0 [Source / destination – 10.0.0.2] <==> Router0 [FastEthernet0/1 – 10.0.0.1] <==> Router0 [Serial0/0/1 – 192.168.1.254] <==> Router2 [Serial 0/0/1 – 192.168.1.253] <==> Router2 [FastEthernet0/0 – 20.0.0.1] <==> PC1 [Destination /source – 20.0.0.2]

### **Route 2**

PC0 [Source / destination – 10.0.0.2] <==> Router0 [FastEthernet0/1 – 10.0.0.1] <==> Router0 [Serial0/0/0 – 192.168.1.249] <==> Router1 [Serial 0/0/0 – 192.168.1.250] <==> Router1 [Serial 0/0/1 – 192.168.1.246] <==> Router2 [Serial 0/0/0 – 192.168.1.245] <==> Router2 [FastEthernet0/0 – 20.0.0.1] <==> PC1 [Destination /source – 20.0.0.2]

By default RIP will use the route that has low hops counts between source and destination. In our network route1 has low hops counts, so it will be selected. We can use *tracert* command to verify it.

Now suppose route1 is down. We can simulate this situation by removing the cable attached between **Router0 [s0/0/1]** and **Router2 [s0/0/1]**.

What will happen now? There is no need to worry. RIP will automatically reroute the traffic. Use *tracert* command again to see the magic of dynamic routing.

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# **CS19541-COMPUTER NETWORKS-LAB**


## **RECORD**

### **Practical 15**

**AIM:- To analyze the different types of web logs using Webalizer tool.**

#### **Procedure**

- Step1: Run webalizer windows version
- Step2. Input web log file (down load from web)
- Step3: Press Run webalizer

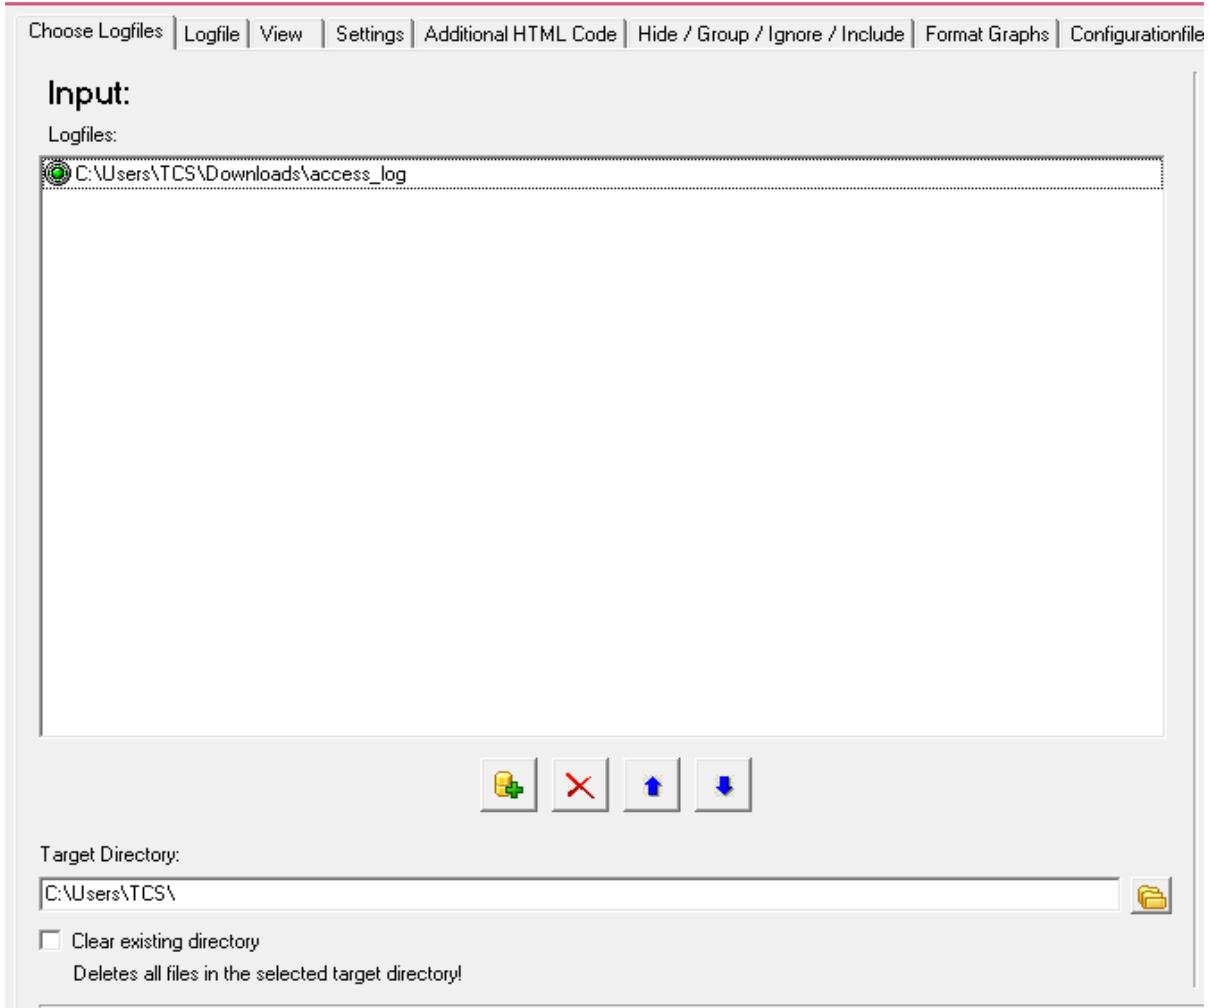

#### **Output:**


**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---


# CS19541-COMPUTER NETWORKS-LAB

## RECORD

### Monthly statistics

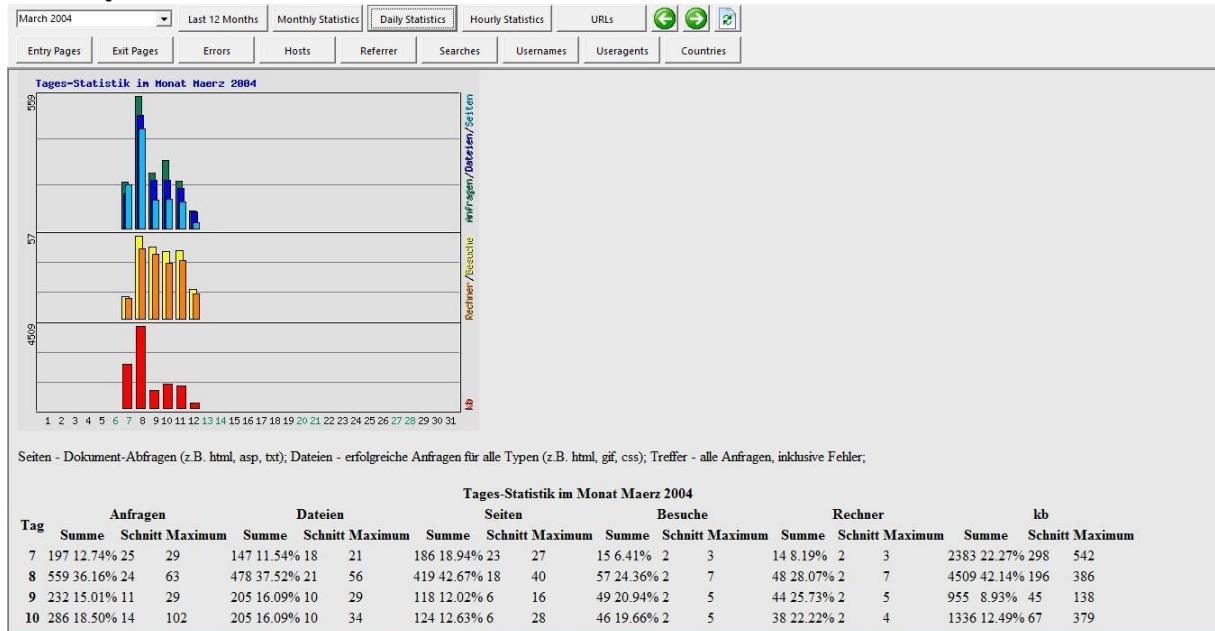

### Hosts

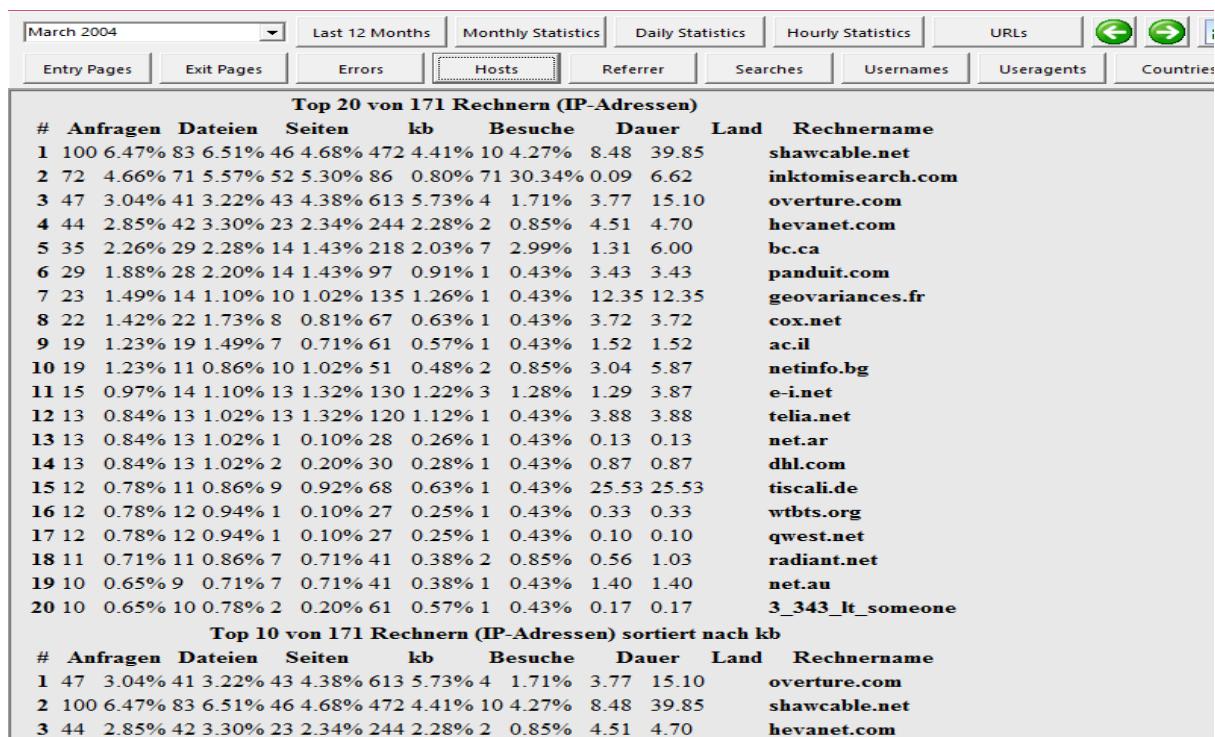


**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---

# CS19541-COMPUTER NETWORKS-LAB

## RECORD

### User-agents

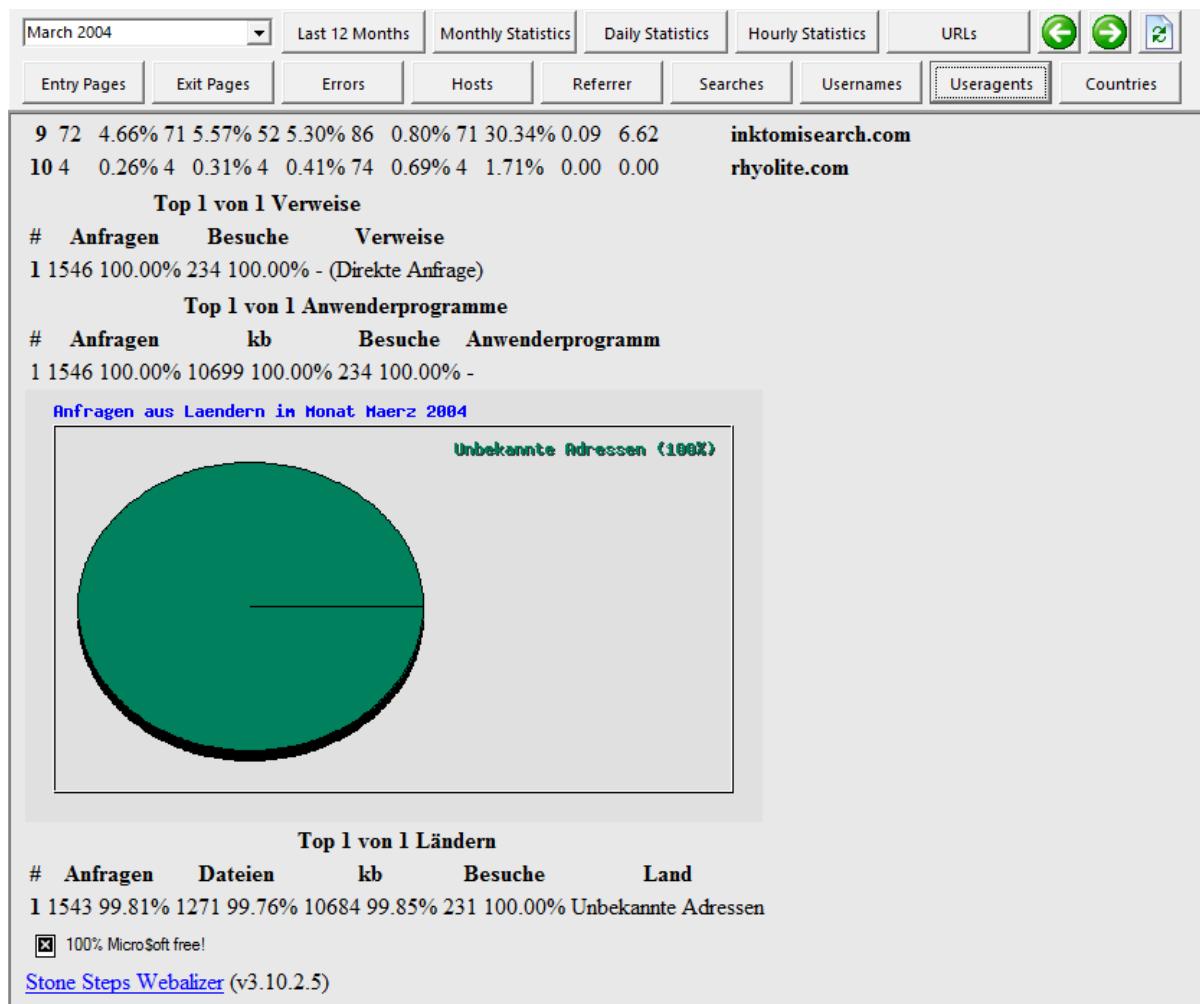

**CS19541-COMPUTER NETWORKS-LAB**  
**RECORD**

---