


MZ35X2142MPFIR-T

3MEGA PIXEL

Туре		AI ZOOM	Mount		С		2/3"
Focal Length		21~750mm	Back Focus		44.1mm		
Fno.		F4.2	Mechanical Bf		17.53mm		
Designed Image Format		2/3"(6.6X8.8mm)	Exit Pupil		-238mm		
Operation Range	Iris	F4.2-Close	Filter Size		M112 P=1		
	Focus	5.0m ~ infinity	Aperture	Front	φ86.7		
	Zoom	21~750mm	Aperture	Rear	φ 17.2		
Control	Iris	DC Motor					
	Focus	DC Motor	Dimension		128.6x125.6x330.5mm		С
	Zoom	DC Motor	Weight		5000g		
Object Size at MOD	Wide	1966x1474mm					
	Tele	56.9x42.7mm					
Field of View	D	28.5°~0.84°	1/1.8" 23.5°~0.69° 1/1.8" 18.9°~0.55° 14.2°~0.41°		20.9°~0.61° 1/2" 16.8°~0.49° 12.6°~0.37°		
	Н	2/3" 23.0°~0.67°					
	V	17.3°~0.50°					
Control		Iris	Focus		Zoom		
Driving Coil/Supply Volt.		DC 6V	DC 12V		DC 12V		
Damping Coil/Current		30mA	60mA or less		60mA or less		
Response Time		_	_		_		
Potentiometer		_	_		_		
Light Measuring Method		_					
Input Signal		_					
Iris Accuracy		_					
Sensitivity Adjustment		_					
Operating Temperature		−10 ~ +50 degree C					DP

DIMENSIONS

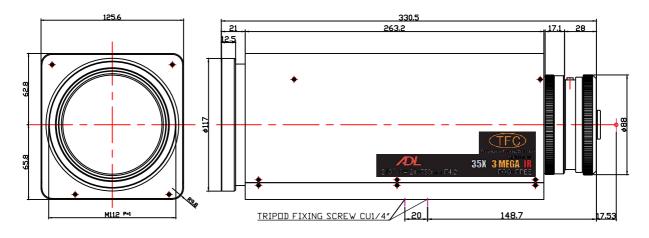

CABLE CONNECTION

DRIVE HDAB-15P

- FOCUS (+) FAR
- FOCUS (-)
- ZOOM (+) WIDE ZOOM (-)
- Filter(+)Dummy
- Filter(-)Visible Cut
- Iris(+) Open
- Iris(-)
- Iris POT WIP
- LENS POT(+)
- FOCUS POT WIP
- **ZOOM POT WIP**
- LENS POT(-)
- Temperature Focusing Correction (+)
- Temperature Focusing Correction (-)