
F/UTP UNHIELDED CAT.6A LSZH 23AWG

Twisted Pair Installation Cable

LOW SMOKE LSZH ZERO HALOGEN



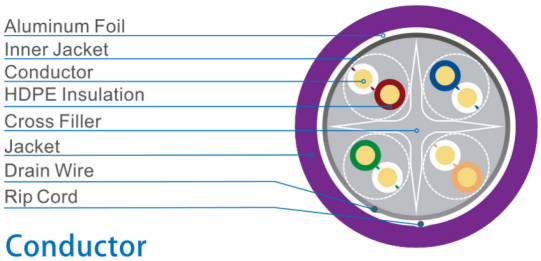

Standard

- IEC/ISO 61156-5
- ANSI/TIA 568C.2
- ISO/IEC 11801

Application

- Suitable for structured premises cabling.
- For transmission of digital and analogue voice and data.
- Especially suitable for all Class EA applications.
- ISDN, Ethernet 10 Base-T, Fast Ethernet 100 Base-T, Gigabit Ethernet 1000Base-T, 10GBase-T (IEEE 802.3).
- Token Ring 4/16 Mbit/s, TP-PMD/TP/DDI 125 Mbit/s, ATM 155 Mbit/s (IEEE 802.5).

Electrical Characteristics

- Bandwidth: 500 MHz
- Transmission Speed: 10 Gbps
- Shielded: Wire and aluminium
- Jacket: LSZH (Low Smoke Zero Halogen)
- Max. Conductor DC Resistance 20°C: 8.4 Ohms/100m
- Resistance unbalance % (Max): 2.5
- Pair-to-Ground Capacitance Unbalance: 330 pF/100m
- Transfer Impedance: Max 10 mOhms/m @ 100 MHz
- Installation temperature: 0~50°C
- Operation temperature: -20~60°C

Impedance:

- 4-100 MHz: 100±15 Ohms
- 100-200 MHz: 100±22 Ohms
- 200-500 MHz: 100±32 Ohms

Conductor

CONDUCTOR

CHARACTERISTICS	DETAIL
CONDUCTOR	SOLID BARE COPPER 23AWG
INSULATION	HDPE
TOTAL NUMBER OF INSULATED CONDUCTORS	8, TWISTED IN 4 PAIRS
COLOR CODE	WHITE-BLUE/BLUE, WHITE-ORANGE/ORANGE, WHITE-GREEN/GREEN, WHITE-BROWN/BROWN
INDIVIDUAL PAIR SHIELD	NONE
OVERALL SHIELD	WHITE-BLUE/BLUE, WHITE-ORANGE/ORANGE, WHITE-GREEN/GREEN, WHITE-BROWN/BROWN
DRAIN WIRE	TINNED COPPER

ORDER INFORMATION

ITEM	OUTER JACKET	OVERALL DIAMETER (MM)
D305-P	CMX	7.6±0.3
D305-C	CM	7.6±0.3
D305-R	CMR	7.6±0.3
D305-L	LSZH	7.6±0.3
D305-E	LDPE	7.6±0.3

NOMINAL TRASMISSION CHARACTERISTICS

Frequency (MHz)	RL (mín) (dB)	IL (máx) (dB/100m)	DOP (máx) (ns/100m)	Delay Skew (máx) (ns/100m)	NEXT (mín) (dB)	PSNEXT (mín) (dB)	ACR-F (mín) (dB/100m)	PSACR-F (mín) (dB/100m)
1	20.0	2	570	45	74.3	72.3	67.8	64.8
4	23.0	3.8	552	45	65.3	63.3	55.8	52.8
10	25.0	6.0	545.4	45	59.3	57.3	47.8	44.8
16	25.0	7.6	543	45	56.2	54.2	43.7	40.7
20	25.0	8.5	542.1	45	54.8	52.8	41.8	38.8
31.25	25.0	10.7	540.4	45	51.9	49.9	37.9	34.9
62.5	21.5	15.4	538.6	45	47.4	45.4	31.9	28.8
100	20.1	19.8	537.6	45	44.3	42.3	27.8	24.8
200	18.0	29.0	536.1	45	39.8	37.8	21.8	18.8
300	17.3	36.4	536.1	45	37.1	35.1	18.3	15.3
400	17.3	43.0	535.8	45	35.3	33.3	15.8	12.8
500	17.3	45.3	535.6	45	33.8	31.8	13.8	10.8

Note: The above transmission performance for the 100M, 20 ± 2°C under the conditions tested.

F/UTP UNHIELDED CAT.6A LSZH 23AWG

LINKWARE CABLE TEST MANAGEMENT SOFTWARE

Cable ID: U/UTPCAT 6A-01

Test Summary: PASS

Date / Time: 01/15/2020 02:16:03 PM
Headroom 3.8 dB (NEXT 12-36)
Test Limit: TIA Cat 6A Perm. Link
Cable Type: Cat 6A U/UTP
NVP: 65.0%

Software Version: V6.0 Build 6
Limits Version: V7.0
Calibration Date:
Main (Module): 01/15/2020
Remote (Module): 01/15/2020


Model: DSX-5000
Main S/N: 2420893
Remote S/N: 2420426
Main Adapter: DSX-PLA004
Remote Adapter: DSX-PLA004


Length (ft), Limit 295	[Pair 78]	297
Prop. Delay (ns), Limit 498	[Pair 45]	490
Delay Skew (ns), Limit 44	[Pair 45]	26
Resistance (ohms)	[Pair 45]	15.4
Insertion Loss Margin (dB)	[Pair 45]	3.4
Frequency (MHz)	[Pair 45]	500.0
Limit (dB)	[Pair 45]	43.8


	Worst Case Margin		Worst Case Value	
PASS	MAIN	SR	MAIN	SR
Worst Pair	12-36	12-36	12-36	12-36
NEXT (dB)	4.3	3.8	4.9	3.8
Freq. (MHz)	111.5	443.0	500.0	443.0
Limit (dB)	41.1	28.4	26.7	28.4
Worst Pair	36	36	36	36
PS NEXT (dB)	5.5	4.2	5.5	4.2
Freq. (MHz)	499.0	443.0	499.0	443.0
Limit (dB)	23.8	25.6	23.8	25.6
PASS	MAIN	SR	MAIN	SR
Worst Pair	12-45	12-45	12-45	12-45
ACR-F (dB)	11.9	11.7	14.0	13.0
Freq. (MHz)	146.5	145.0	469.0	406.0
Limit (dB)	20.9	21.0	10.8	12.0
Worst Pair	12	45	36	36
PS ACR-F (dB)	12.8	12.6	14.8	14.1
Freq. (MHz)	130.5	132.0	500.0	497.0
Limit (dB)	18.9	18.8	7.2	7.3
N/A	MAIN	SR	MAIN	SR
Worst Pair	36-78	12-36	12-36	36-45
ACR-N (dB)	9.4	9.1	19.9	20.0
Freq. (MHz)	27.5	15.6	500.0	498.0
Limit (dB)	41.7	47.9	-17.1	-16.9
Worst Pair	36	36	36	36
PS ACR-N (dB)	10.0	9.8	20.6	21.1
Freq. (MHz)	11.1	15.6	500.0	497.0
Limit (dB)	48.9	45.5	-20.0	-19.7
PASS	MAIN	SR	MAIN	SR
Worst Pair	45	45	45	45
RL (dB)	6.6	5.2	7.6	9.0
Freq. (MHz)	76.8	76.5	495.0	485.0
Limit (dB)	15.1	15.2	8.0	8.0


Compliant Network Standards:


10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	10GBASE-T	ATM-25
ATM-51	ATM-155	100VG-AnyLan
TR-4	TR-16 Active	TR-16 Passive





























FLUKE networks