
U/UTP UNSHIELDED CAT.6 LSZH 23AWG (BLUE JACKET)

Twisted Pair Installation Cable

LOW SMOKE LSZH ZERO HALOGEN



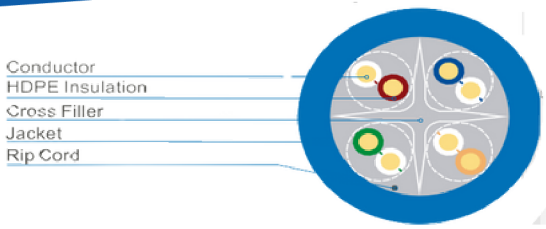

Application

- Meets or exceeds requiremenst of ANSI/TIA- 568- C2 Category 6 AND ISO 11801 2nd Edition Class E channel standards
- Meets or exceeds requirements of ANSI/TIA- 568- C2 and ICE 61156-5category 6 component standards
- Meets requirements of IEEE 802. 3af and IEEE 802. 3af. and IEEE 802. 3at for PoE applications
- Third party tested to comply whit ASI/TIA/EIA 568-C2
- Descending length cable markings enable easy identification of remaining cable which reduces installation time and cable scrap.
- Rated Temperature: 75°Color Availability: Additional cable colors available

CONDUCTOR

CHARACTERISTICS	DETAIL
CONDUCTOR	SOLID BARE COPPER 23 AWG
INSULATION	HDPE
TOTAL NUMBER OF INSULATED CONDUCTORS	8, TWSTED IN 4 PAIRS
COLOR CODE	WHITE-BLUE/BLUE, WHITE-ORANGE/ORANGE, WHITE-GREEN/GREEN, WHITE-BROWN/BROWN
INDIVIDUAL PAIR SHIELD	NONE
OVERALL SHIELD	NONE
DRAIN WIRE	NONE

Electrical Characteristics

- Bandwidth: 250 MHz
- Transmission Speed: 1 Gbps
- Jacket: PVC
- Impedance: 1-250 MHz 100±15 (Ohms).
- Rated Temperature: 75°C
- DC Resistance Unbalance (%) Max: 2.5
- DC Resistance 20°C: 8.4 (Ohms/100m).
- DC Resistance 20°C: 8.4 (Ohms/100m)
- Pair-to-Ground Capacitance Unbalance: 330 (pF/100m)
- Insulation Resistance: >5000 MΩ·km
- Dielectric strength: DC 2500V 2S

ORDER INFORMATION

ITEM	OUTER JACKET	OVERALL DIAMETER (MM)
D165-P	CMX	6.4±0.2
D165-C	CM	6.4±0.2
D165-R	CMR	6.4±0.2
D165-L	LSZH	6.4±0.2
D165-E	LDPE	6.4±0.2

NOMINAL TRASMISSION CHARACTERISTICS

Frequency (MHz)	RL (mín) (dB)	IL (máx) (dB/100m)	DOP (máx) (ns/100m)	Delay Skew (máx) (ns/100m)	NEXT (mín) (dB)	PSNEXT (mín) (dB)	ACR-F (mín) (dB/100m)	PSACR-F (mín) (dB/100m)
1	20.0	2	570	45	74	72	67.8	64.8
4	23.0	3.8	552	45	65	63	55.7	52.7
10	25.0	6.0	545	45	59	57	47.8	44.8
16	25.0	7.6	543	45	56	54	43.7	40.7
20	25.0	8.5	542	45	55	53	41.7	38.7
31.25	23.6	10.7	540	45	52	50	37.9	34.9
62.5	21.5	15.4	538	45	47	45	31.8	28.8
100	20.1	19.8	537	45	44.3	42.3	27.8	24.8
200	18.0	29.0	536	45	39.7	37.7	21.7	18.7
250	17.3	32.8	535	45	38	36	19.8	16.8

Note: The above transmission performance for the 100M, 20 ± 2°C under the conditions tested.

LINKWARE
CABLE TEST MANAGEMENT SOFTWARE

Cable ID: U/UTPCAT6MWA


Test Summary: PASS

Date / Time: 04/01/2020 08:53:51 AM
Headroom 6.0 dB (NEXT 45-78)
Test Limit: TIA Cat 6 Perm. Link
Cable Type: Cat 6 U/UTP
NVP: 69.0%


Operator: Your Name
Software Version: 2.7800
Limits Version: 1.9500
Calibration Date:
Main (Tester): 04/01/2020
Remote (Tester): 04/01/2020


Model: DSX-5000
Main S/N: 9391107
Remote S/N: 9391108
Main Adapter: DSX-PLA002
Remote Adapter: DSX-PLA002

Length (ft), Limit 295	[Pair 78]	297
Prop. Delay (ns), Limit 498	[Pair 45]	463
Delay Skew (ns), Limit 44	[Pair 45]	26
Resistance (ohms)	[Pair 45]	13.7
Insertion Loss Margin (dB)	[Pair 36]	3.1
Frequency (MHz)	[Pair 36]	246.0
Limit (dB)	[Pair 36]	30.8





Wire Map (T568B)
PASS







	Worst Case Margin		Worst Case Value	
PASS	MAIN	SR	MAIN	SR
Worst Pair	45-78	12-45	36-78	12-45
NEXT (dB)	6.0	8.6	8.0	8.6
Freq. (MHz)	11.9	214.0	238.5	214.0
Limit (dB)	56.7	36.4	35.7	36.4
Worst Pair	78	45	36	45
PS NEXT (dB)	6.6	8.4	7.9	8.4
Freq. (MHz)	11.9	214.0	245.0	214.0
Limit (dB)	54.3	33.8	32.9	33.8







PASS	MAIN	SR	MAIN	SR
Worst Pair	12-36	36-12	12-36	36-12
ACR-F (dB)	3.4	4.7	3.4	4.7
Freq. (MHz)	241.0	237.5	241.0	241.0
Limit (dB)	16.5	16.7	16.5	16.5
Worst Pair	36	12	36	12
PS ACR-F (dB)	6.1	6.1	6.1	6.1
Freq. (MHz)	241.0	241.0	241.0	241.0
Limit (dB)	13.5	13.5	13.5	13.5







N/A	MAIN	SR	MAIN	SR
Worst Pair	45-78	45-78	12-36	12-45
ACR-N (dB)	6.5	9.3	11.6	13.5
Freq. (MHz)	11.9	2.6	245.0	250.0
Limit (dB)	50.6	62.0	4.7	4.2
Worst Pair	78	45	36	45
PS ACR-N (dB)	7.1	9.4	11.2	12.7
Freq. (MHz)	11.9	14.4	245.0	241.0
Limit (dB)	48.2	46.3	2.1	2.5





PASS	MAIN	SR	MAIN	SR
Worst Pair	12	12	78	78
RL (dB)	4.7	6.7	10.3	10.3
Freq. (MHz)	3.6	3.6	236.5	229.0
Limit (dB)	21.0	21.0	10.3	10.4





Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	ATM-25	ATM-51
ATM-155	100VG-AnyLan	TR-4
TR-16 Active	TR-16 Passive	

FLUKE networks