

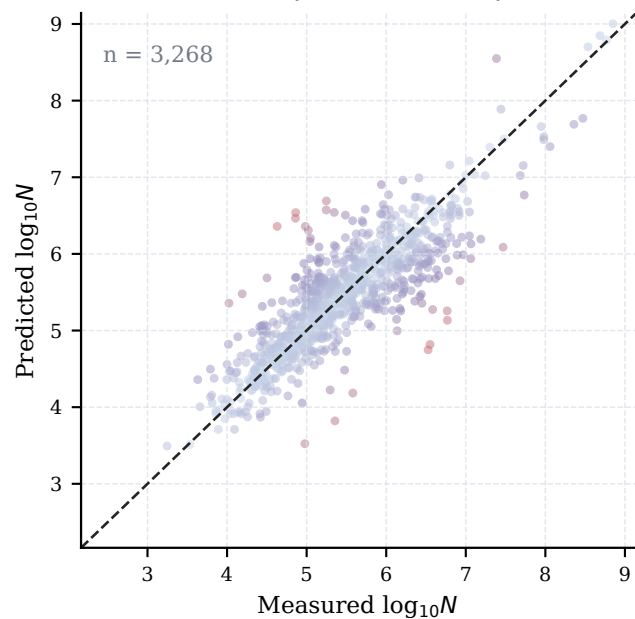


Main-model performance across sparsity and strict test splits


(a) 2 known points | MAE=0.306 | $R^2=0.735$

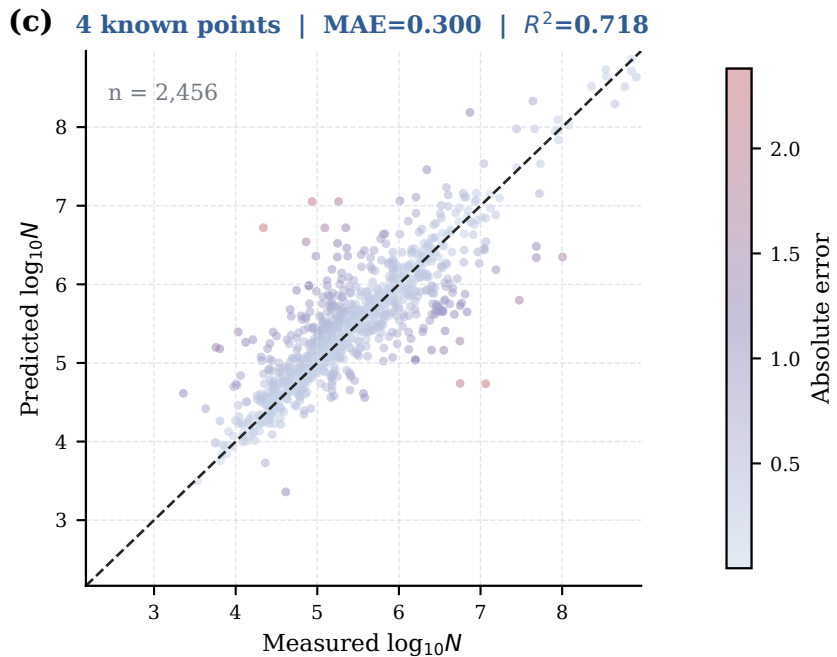

(b) 3 known points | MAE=0.292 | $R^2=0.758$

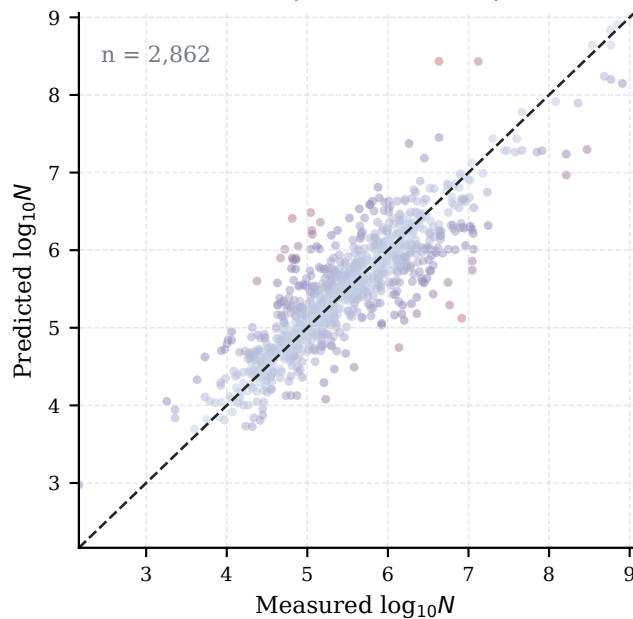

(d) Hidden-point error distribution

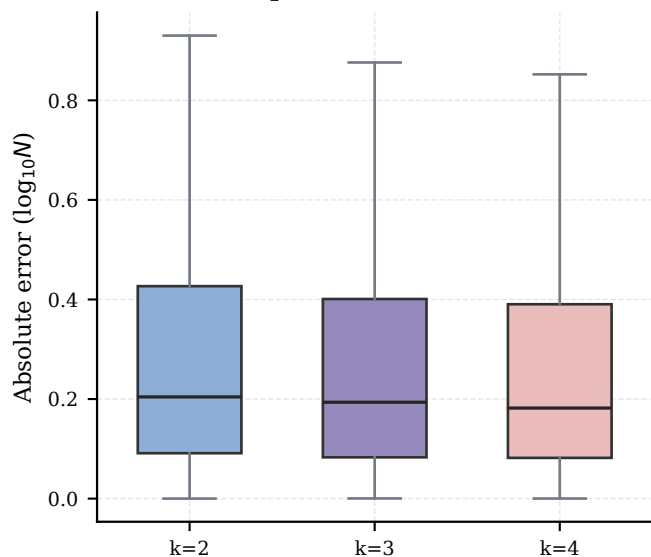

(e) Strict-split MAE ($\log_{10}N$)

Source holdout	k=2	k=3	k=4
Source holdout	0.306	0.292	0.300
Ti-6Al-4V	0.410	0.387	0.376
IN718	0.305	0.279	0.267
AlSi10Mg	0.382	0.359	0.356
316L	0.257	0.236	0.242

Normalized generative diagnostics

