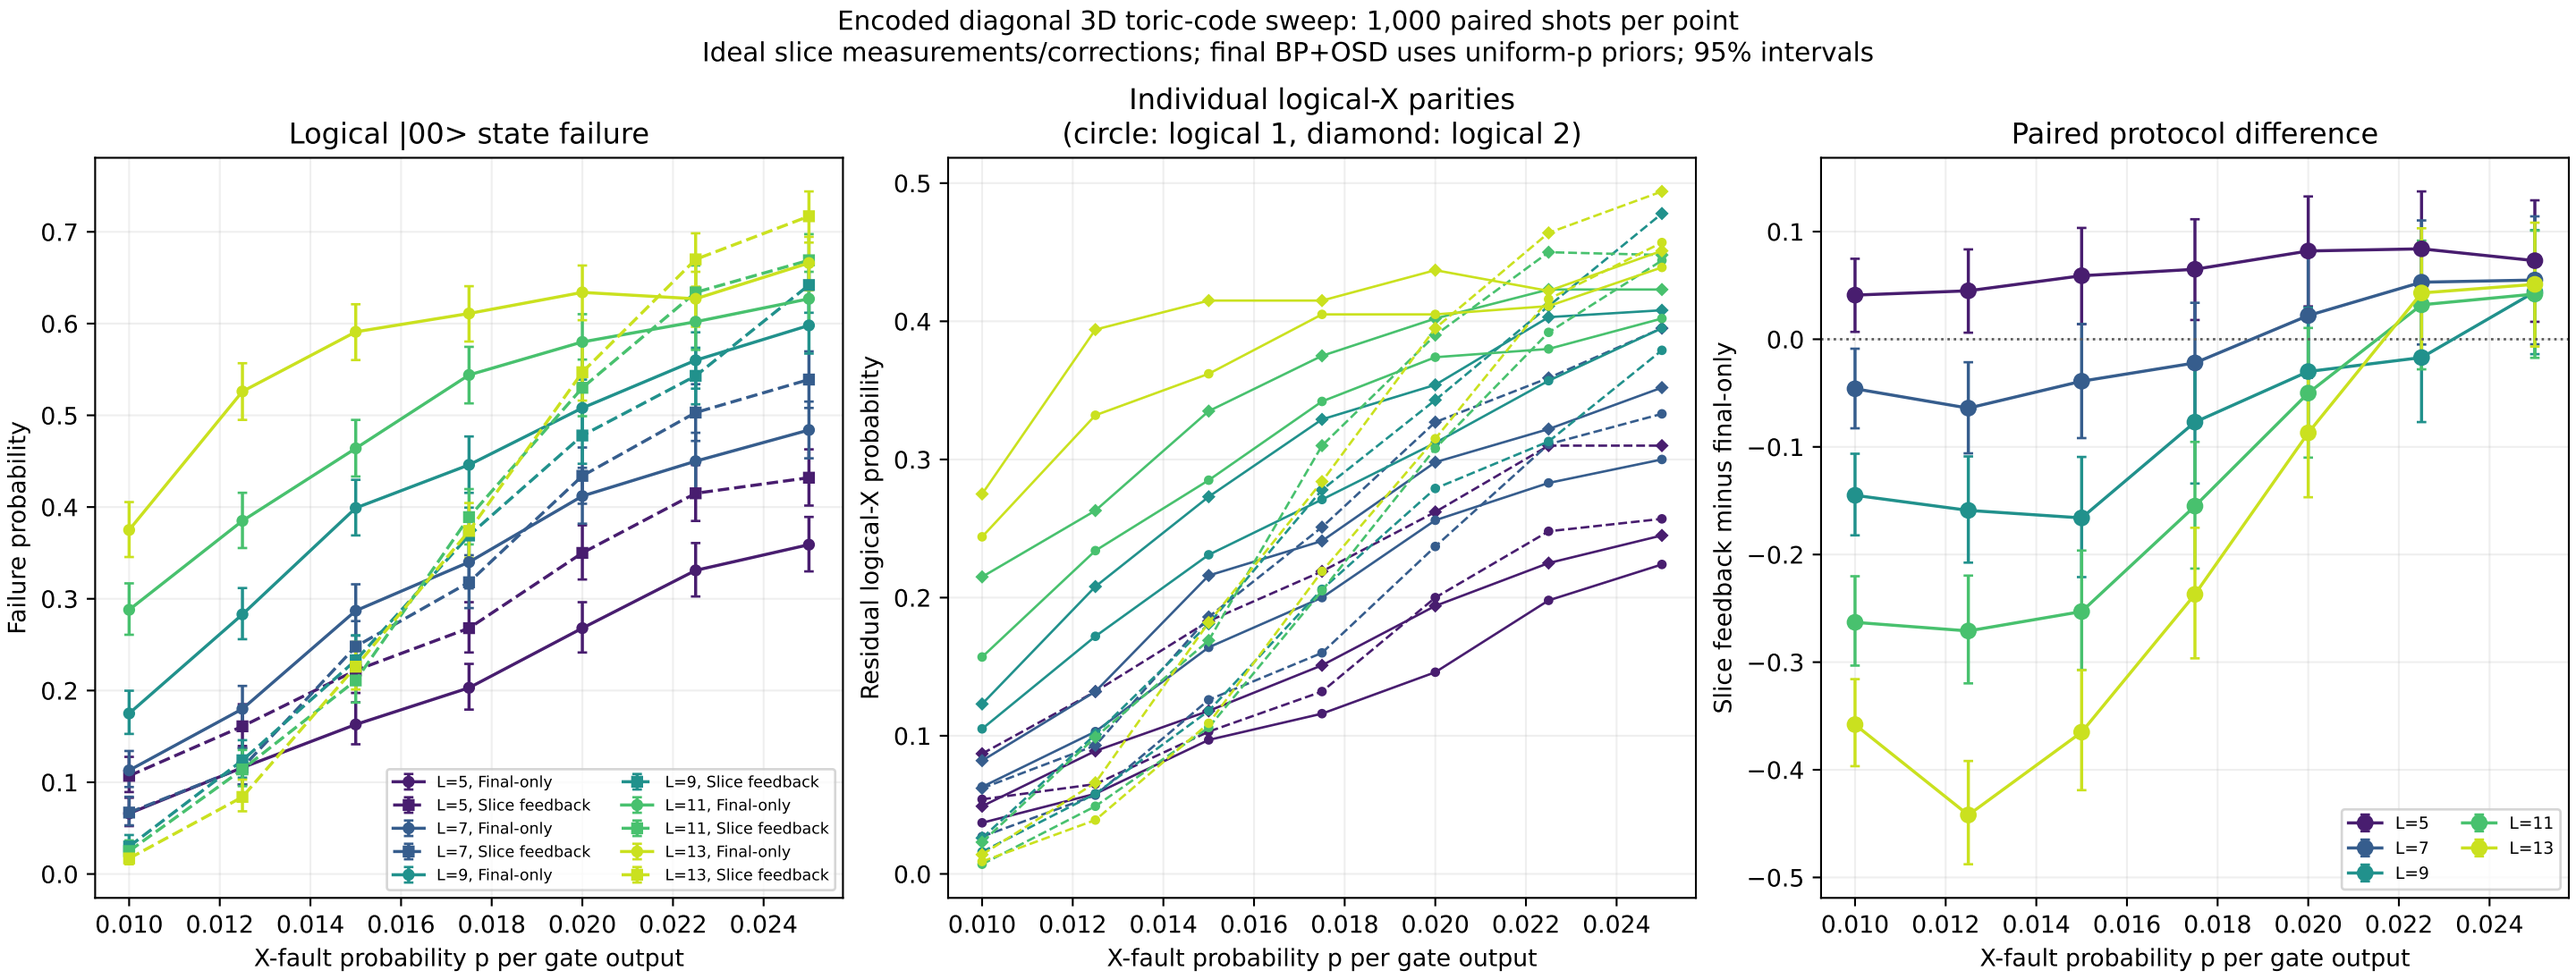
Encoded diagonal 3D toric-code sweep: 1,000 paired shots per point
Ideal slice measurements/corrections; final BP+OSD uses uniform-p priors; 95% intervals
Logical |00> state failure
Failure probability
X-fault probability p per gate output
L=5, Final-only
L=5, Slice feedback
L=7, Final-only
L=7, Slice feedback
L=9, Final-only
L=9, Slice feedback
L=11, Final-only
L=11, Slice feedback
L=13, Final-only
L=13, Slice feedback
Individual logical-X parities
(circle: logical 1, diamond: logical 2)
Residual logical-X probability
X-fault probability p per gate output
Paired protocol difference
Slice feedback minus final-only
X-fault probability p per gate output
L=5
L=7
L=9
L=11
L=13