


## Cat. 6A S/FTP Toolless Keystone Jack

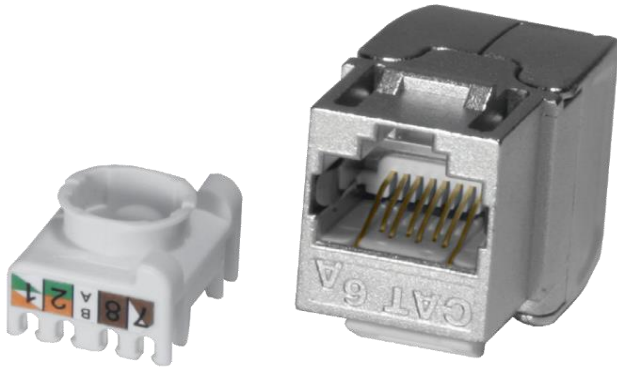

CAT 6A S/FTP Shielded Keystone Jack is designed to comply with ANSI/TIA-568-2.D for Cat.6A (ISO/IEC 11801).

Tool-less design, no punchdown tool required.  
Backwards compatibility with Cat.5e and Cat.6.

### Features

Fully Shielded

Die-cast Zinc-Alloy Housing

Front Connection Spring Wire: Phosphor Bronze Alloy. Plated with 50 micro-inch of Gold over 70-100 micro-inch of Nickel

IDC Material: Phosphor Bronze Alloy with 10 micro-inch 100% Tin Alloy

Can terminate stranded or solid 22~24WG wires.

T568A/B wiring

### Applications

Voice

10GBASE-T Ethernet

100BASE-TX Fast Ethernet

1000BASE-TX Gigabit Ethernet

1000BASE-T Gigabit Ethernet

10BASE-TX Ethernet

ATM CB1G

155/622 Mbps ATM

100 Mbps TP-PMD

100VG-AnyLAN

4/16 Mbps Token Ring

### Standards

C(UL), ETL Verified

UL 1863 Safety listed

UL 94V-0 flammability






ANSI/TIA Standard 568-2.D

ISO/IEC 11801 2. Ed.

CENELEC EN 50173

IEC 60603-7

FCC 68.F

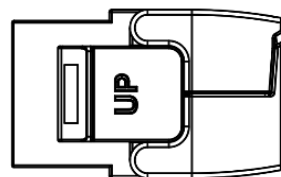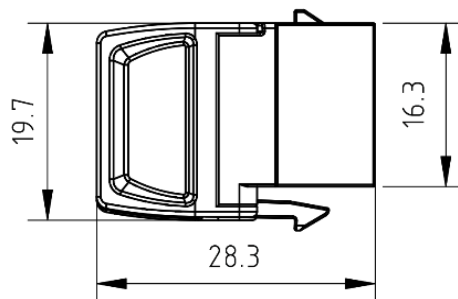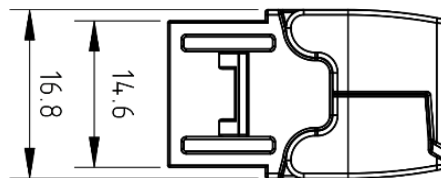

### Available Colours

2117-42230 - Metallic Grey