


0.5U 24 Port FTP Snap-In Panel

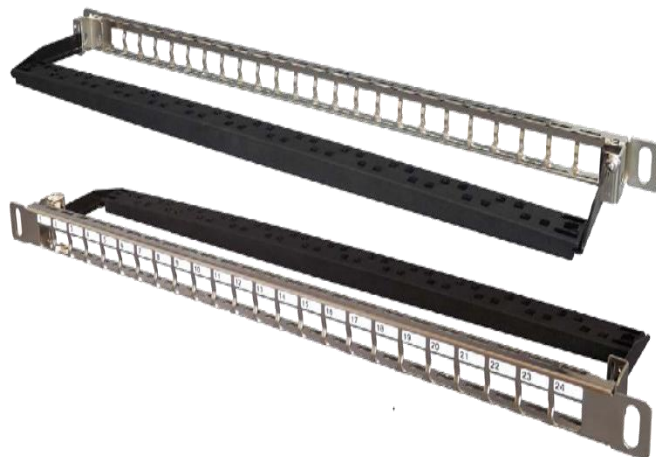

Features

- Unloaded zinc alloy Panel
- FTP snap-in type
- High density – 24 ports in 0.5U
- Compatible with all Systhames Keystone Jacks
- Grounding point and 400mm ground wire included
- Individual port labelling
- Individually numbered ports
- Integral, removable Rear cable management

Applications

- Voice: T1; ISDN
- 10BASE-T (IEEE 802.3)
- 16Mbps Token Ring (IEEE802.5)
- 100VG-AnyLAN (IEEE802.12)
- 100BASE-T Ethernet (IEEE802.3)
- 155/622Mbps 1.2/2.4 Gbps ATM
- 1000Mbps Gigabit Ethernet
- 550MHz Broadband Video

The Systhames 0.5U 24 Port UTP Snap-In Panel allows 24 Keystone Jacks to be terminated in a 0.5U chassis. This high density design makes it ideal for use in applications where space is at a premium, such as data centres and large Comms rooms. The panel can be used with Cat 6A, Cat 6 and Cat 5e Shielded Keystone Jacks which must be ordered separately. Keystone Jacks can be easily installed and removed from the rear of the panel. The rear cable management bar can be easily detached without requiring any tools, thus providing improved access for installing or removing jacks. Later it can then be quickly placed back to provide support and management of incoming cables. The panel comes with a 400mm ground wire for connection to the cabinet or rack grounding system.

Compatible Keystone



Standards

- SO/IEC11801 2nd edition
- ANSI/TIA Standard 568-2.D
- CENELEC EN 50173

Product Code

2517-24210 - 0.5U 24 Port FTP Snap-In Panel