


Drawing index & corrected desk brief

		DESIGN / CONSTRUCTION NOTES
J01	Desk / seated-user elevation	CONFIRMED Overall length 7 ft / 2133.6. Overall depth 2 ft 8 / 812.8. Lower projection 1 in / 25.4. INTERPRETATION Projection applied on all four sides while keeping room footprint unchanged. PROPOSED Height 762; solid top 38.1 thick. Body corner R60; top corner R35. Pedestal face edge R40. Five smoothly sculpted ribs per return. No added projection beyond envelope. Front = seated / drawer side. Rear = decorative visitor / wall face. Reference: IMG_3774 and IMG_3775.
J02	Desk / sculpted visitor elevation	
J03	Desk / layered top and monitor plan	
J04	Desk / both curved end elevations	
J05	Desk / two construction sections	
J06	Desk / lower projection and curve details	
J07	Desk / component and radius schedule	
B01	Bed / revised wall elevation	
W01	Wardrobe / reversed material door detail	
Revision 21 / geometry correction		
The LOWER BODY projects 25.4 mm beyond the tabletop, not the reverse.		
Overall body remains 2133.6 x 812.8; inset solid top is 2082.8 x 762.		
Smooth S-curved ribs, rounded pedestal shoulders and radiused corners added.		
Both seated-side drawer banks retained; portrait-left + landscape-centre screens.		
Bed and wardrobe changes from Revision 20 retained on B01 and W01.		
All unmeasured construction sizes and curve profiles remain proposed.		

Desk / front elevation - seated user

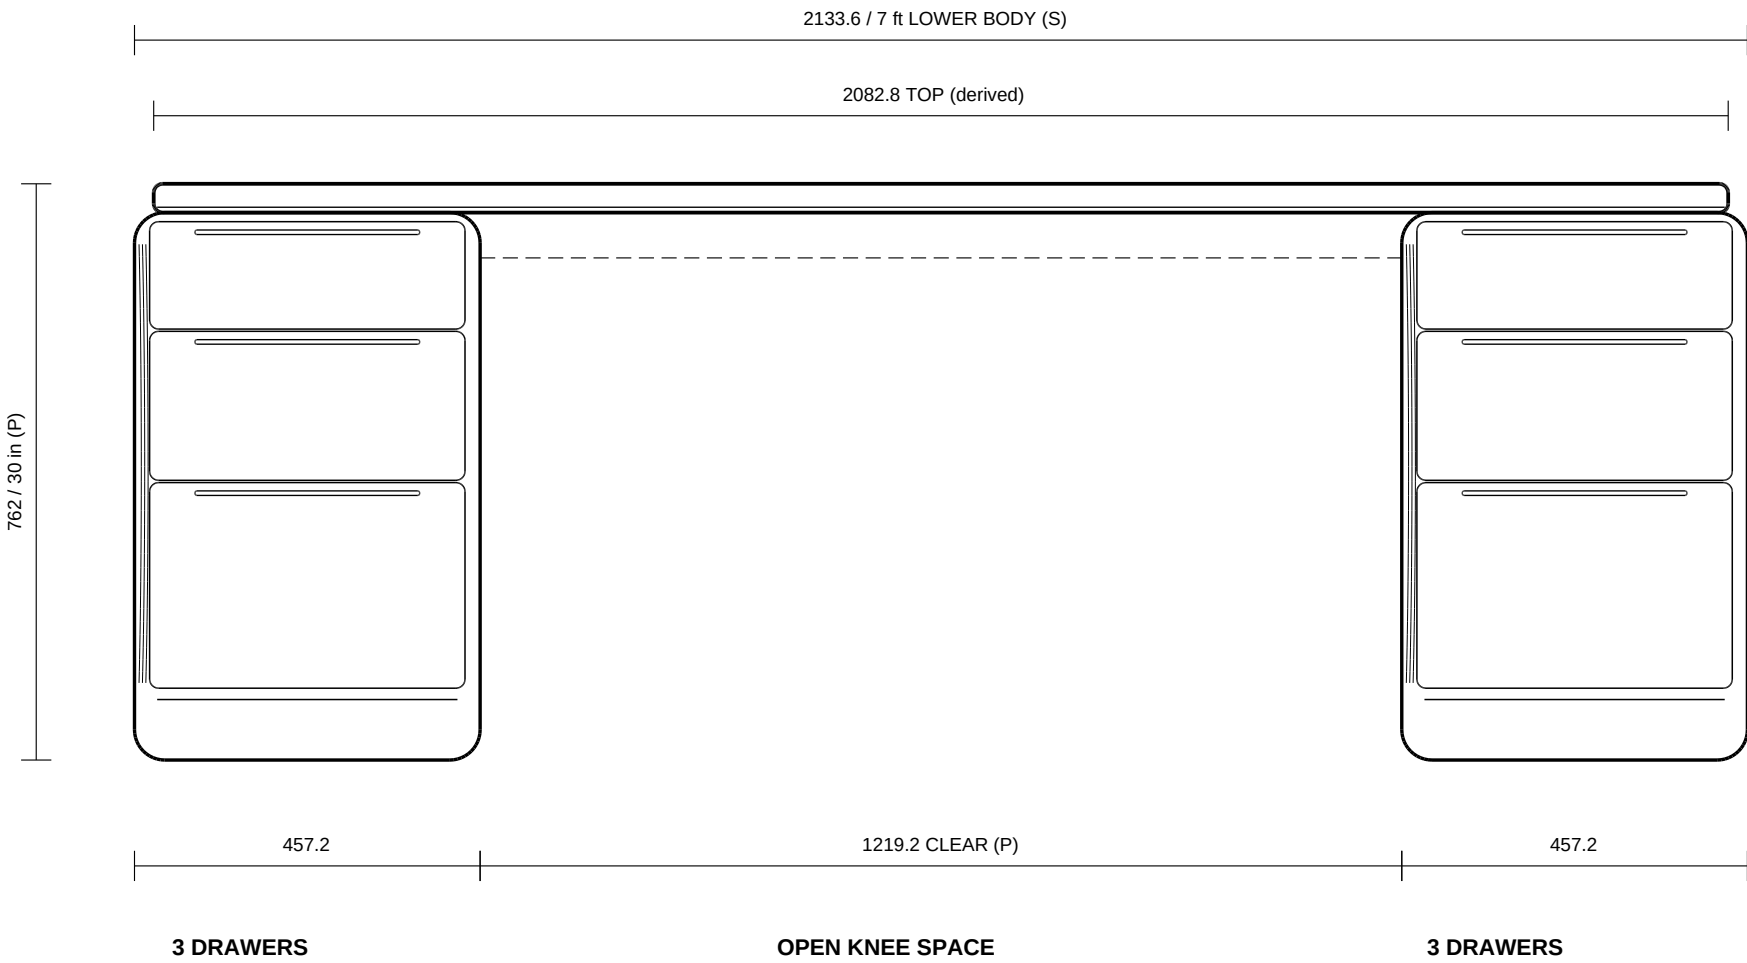

Body shoulders extend 25.4 beyond each top end; see J06 enlarged section.

Rounded drawer fronts sit within the sculpted pedestal envelope.

Clear width is measured between inner pedestal faces; no centre drawer.


DESIGN / CONSTRUCTION NOTES

- 01 Inset solid wood top: 2082.8 wide.
- 02 Lower body: 2133.6 overall wide.
- 03 457.2-wide pedestal each side (P).
- 04 1219.2 clear knee width (P).
- 05 723.9 to top underside (P).
- 06 80-high recessed plinth (P).
- 07 Drawer front pitch (P):
145 / 200 / 274.9.
- 08 Three mm face gaps (P).
- 09 Rounded front corners R12 (P).
- 10 Recessed upper-edge pulls (P).

Drawer band begins 12 below top.

Top/body shelf is a lower projection,
not an unsupported tabletop lip.

Desk / sculpted rear elevation

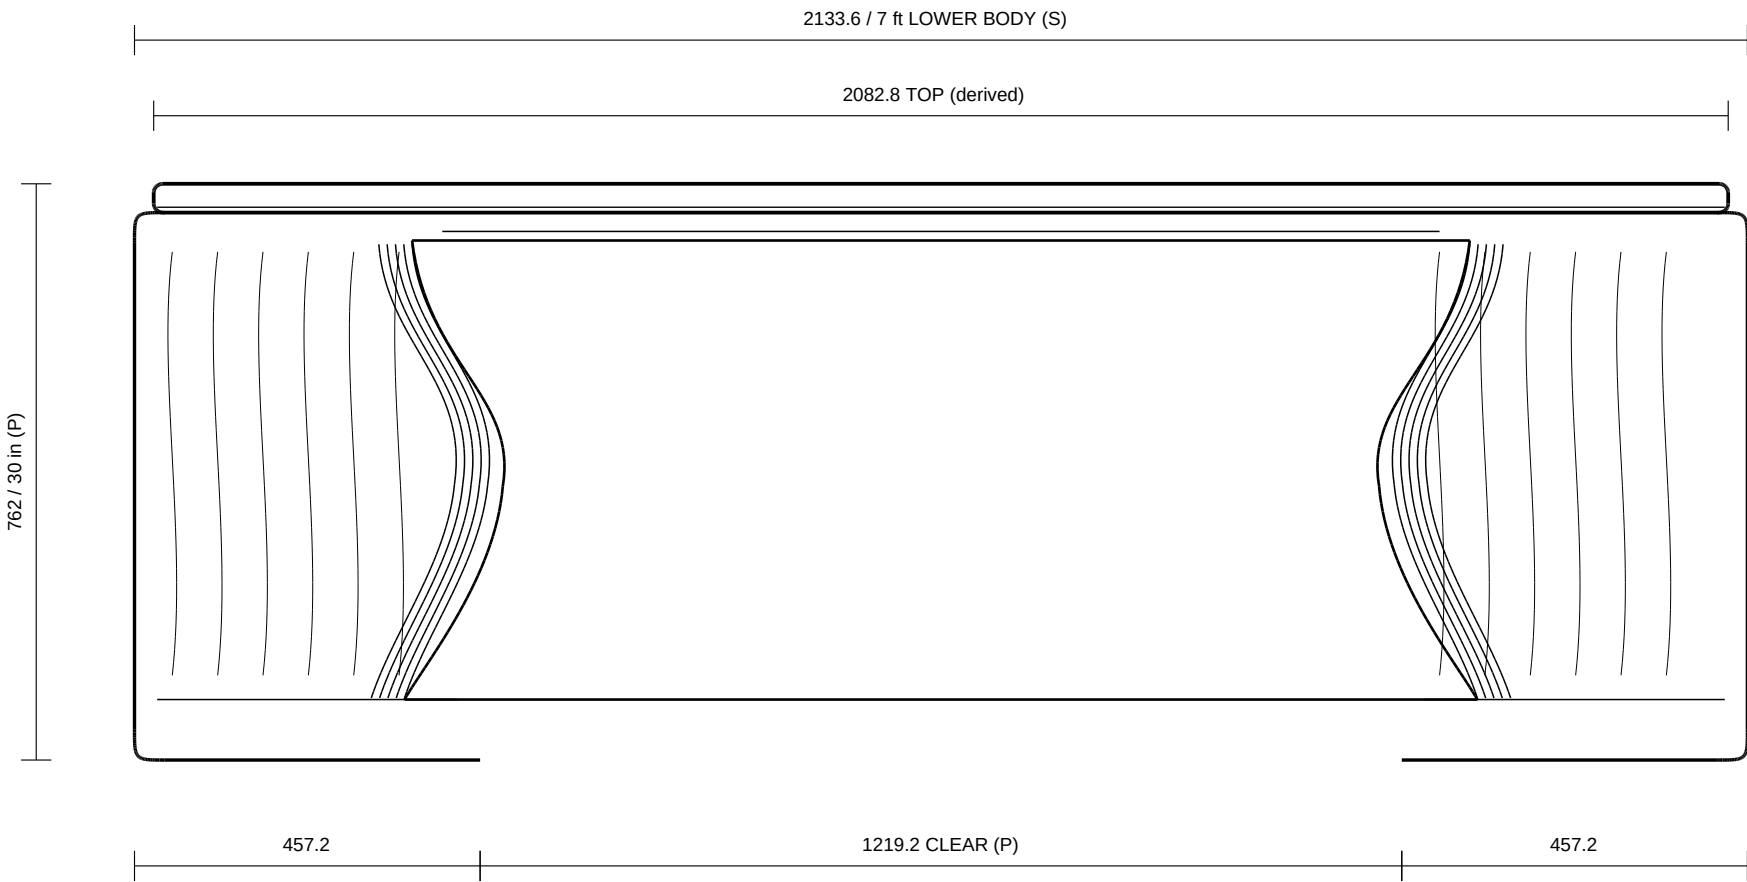

Five continuous S-curved ribs at each transition; mirrored about the centre.

Broad veneer side cheeks frame the contrasting central modesty face.


Concealed light line beneath top; no logo or ornament added to central panel.

DESIGN / CONSTRUCTION NOTES

- 01 Lower body wider than top.
- 02 Outer shoulder radius R40 (P).
- 03 Five ribs per sculpted return.
- 04 Rib centres spaced 11 mm (P).
- 05 Rib width 6; relief 4 mm (P).
- 06 Continuous curves, no sharp folds.
- 07 Modesty face: upholstered (P),
on stable 18 mm substrate.
- 08 Veneered curved pedestal cheeks.
- 09 80 mm recessed base line (P).
- 10 Recessed warm LED slot (P).

Profile traced as a design interpretation
of perspective references. Make a
full-size curve template before cutting.

Desk / top, lower footprint & equipment

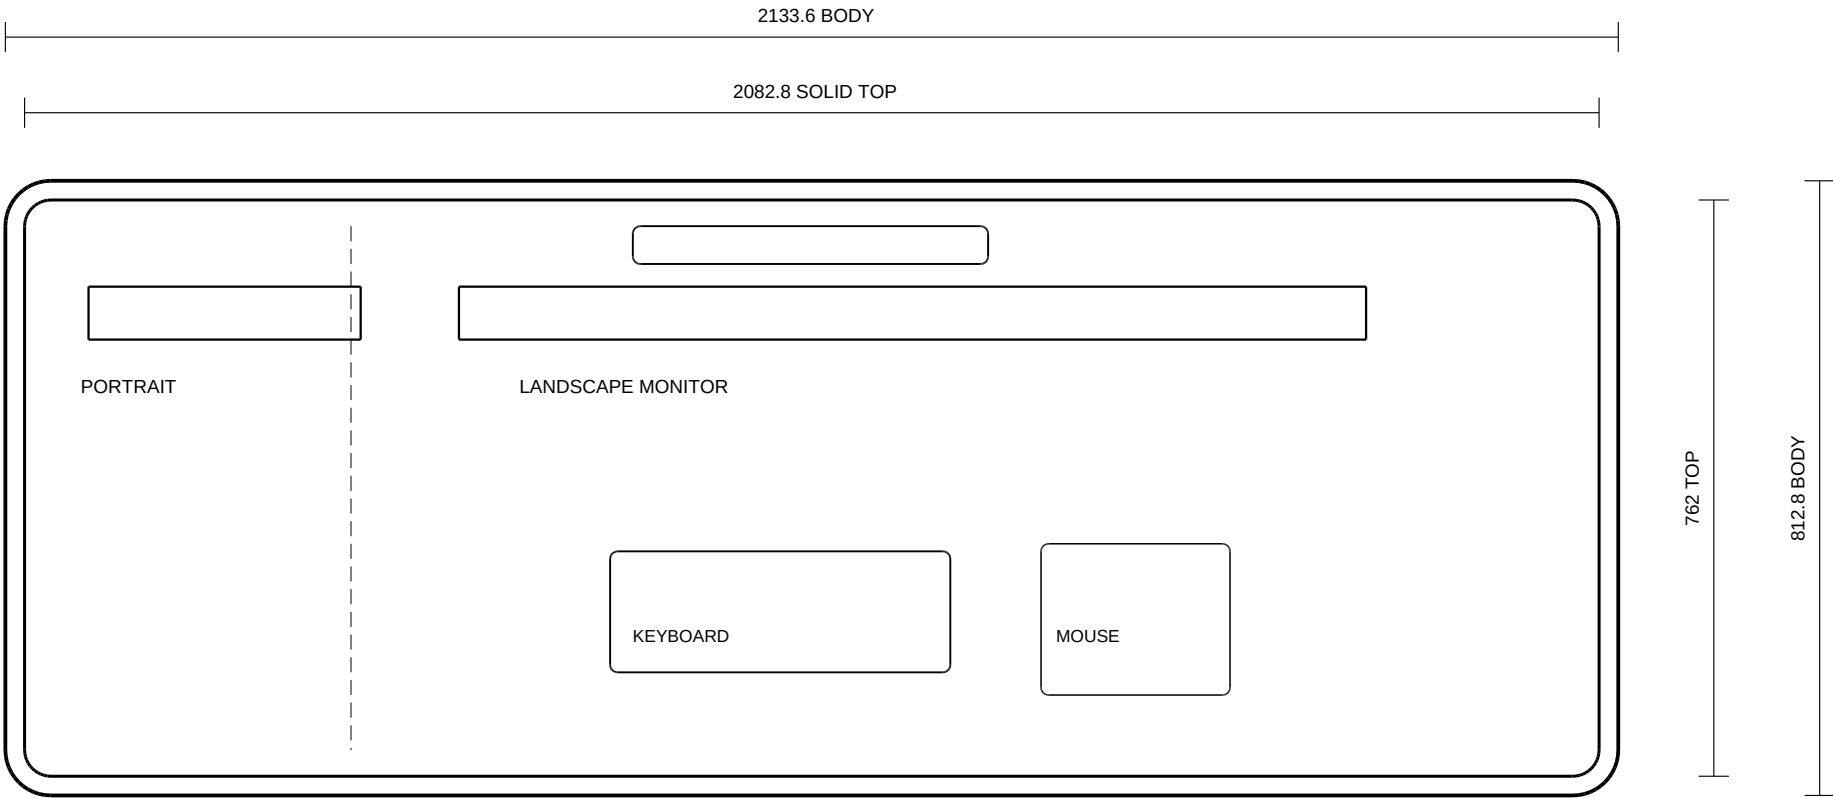

SEATED USER / FRONT

Outer rounded outline = lower body. Inner rounded outline = inset tabletop.

A 25.4 mm lower ledge surrounds the top on straight edges; corner radii shown.

Monitor envelopes are illustrative; confirm actual mount and cable templates.

DESIGN / CONSTRUCTION NOTES


- 01 Overall footprint unchanged.
- 02 Top inset 25.4 on every edge.
- 03 Body corner R60 (P).
- 04 Top corner R35 (P).
- 05 Timber grain along desk length.
- 06 Cable lid 470 x 50 (P).
- 07 Portrait left: 360-wide envelope.
- 08 Landscape: 1200-wide envelope.
- 09 Top monitor positions proposed.

No rear clamping lip is provided.

Use approved through-top mounts with backing plates, or wall mounts.


Select hardware before drilling.

Desk / curved left and right ends

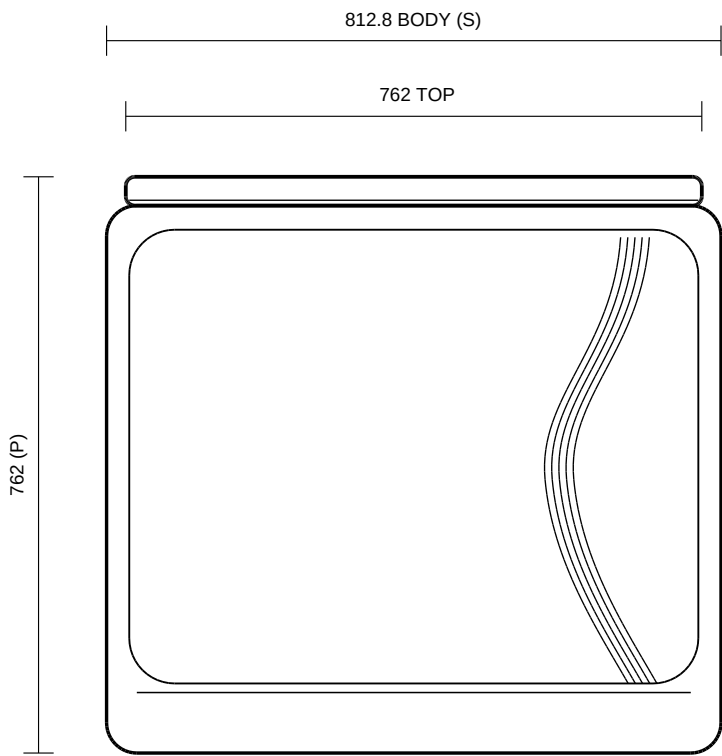

LEFT SIDE

USER < > WALL

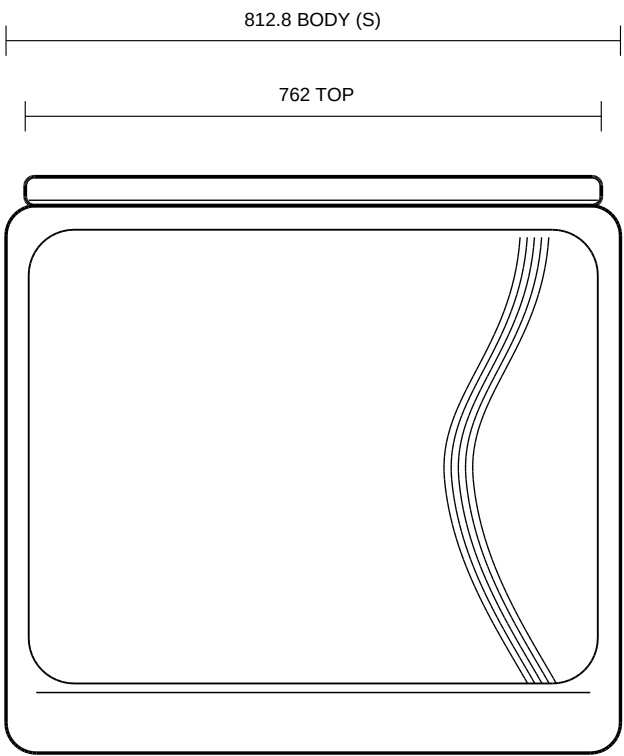

RIGHT SIDE

USER < > WALL

Radiused outer shells and smooth fluted S-curves replace the former angular profile.


Maximum lower-body depth is 812.8; solid top depth is 762. No top overhang.

DESIGN / CONSTRUCTION NOTES


- 01 25.4 lower projection both ends.
- 02 Rounded shell edges R40 (P).
- 03 Inset field corners R60 (P).
- 04 Five curved ribs / 11 pitch (P).
- 05 Shaped skin over stable substrate.
- 06 Recessed plinth behind outer shell.
- 07 Front drawers open toward user.

Left and right skins use mirrored shop templates. Keep carved relief inside the 812.8 depth envelope. No straight chevron approximation.

Desk / pedestal and knee sections

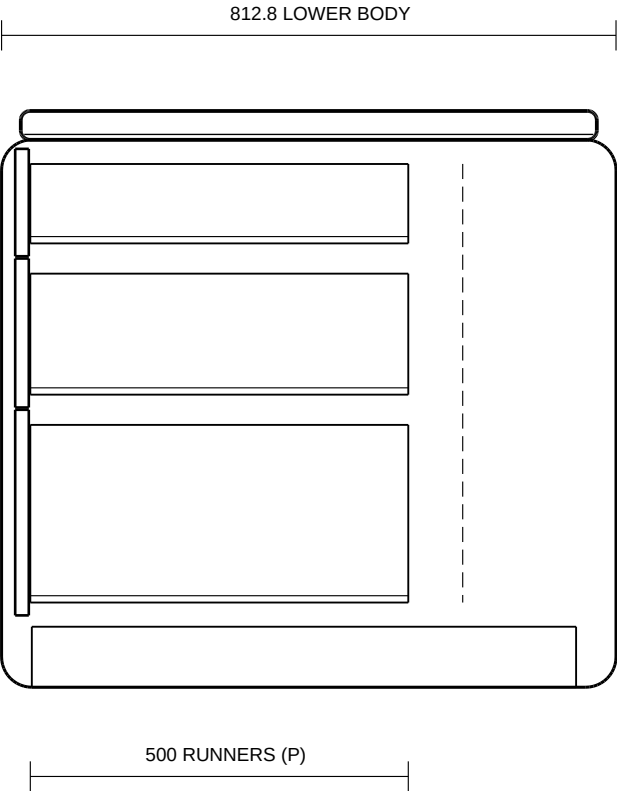

A-A / PEDESTAL SECTION

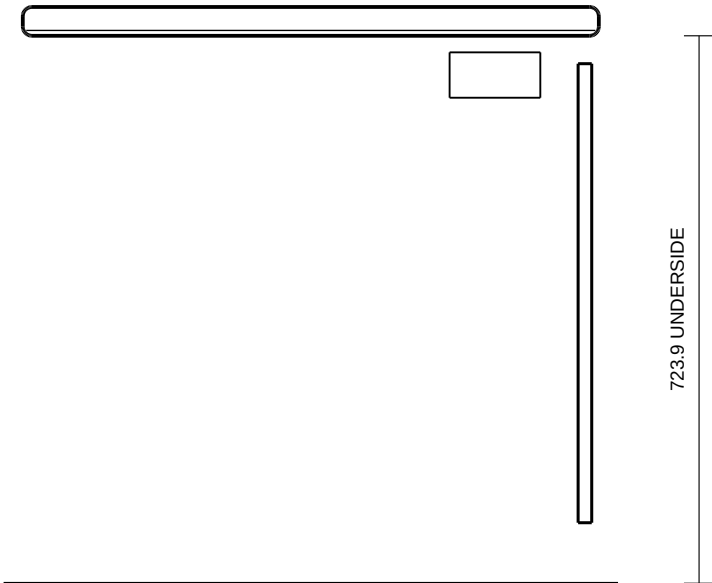

B-B / KNEE SECTION

18 mm carcass; 15 mm drawer sides; 9 mm drawer bases; all proposed.

Fabric modesty face bottom 80 above floor; front knee space remains unobstructed.

DESIGN / CONSTRUCTION NOTES


- 01 Lower curved skin wraps carcass.
- 02 Top is inset, not cantilevered.
- 03 Runner nominal length 500 (P).
- 04 Drawer fronts finish at plinth band.
- 05 120 x 60 cable tray (P).
- 06 Reinforced monitor fixing rail.
- 07 Slotted solid-wood top fixings.
- 08 Accessible lighting driver.

Section A: cut through drawer bank.

Section B: cut through centre opening.


Drawer width and fixing positions depend on chosen runner hardware.

Desk / lower projection & sculpted profiles

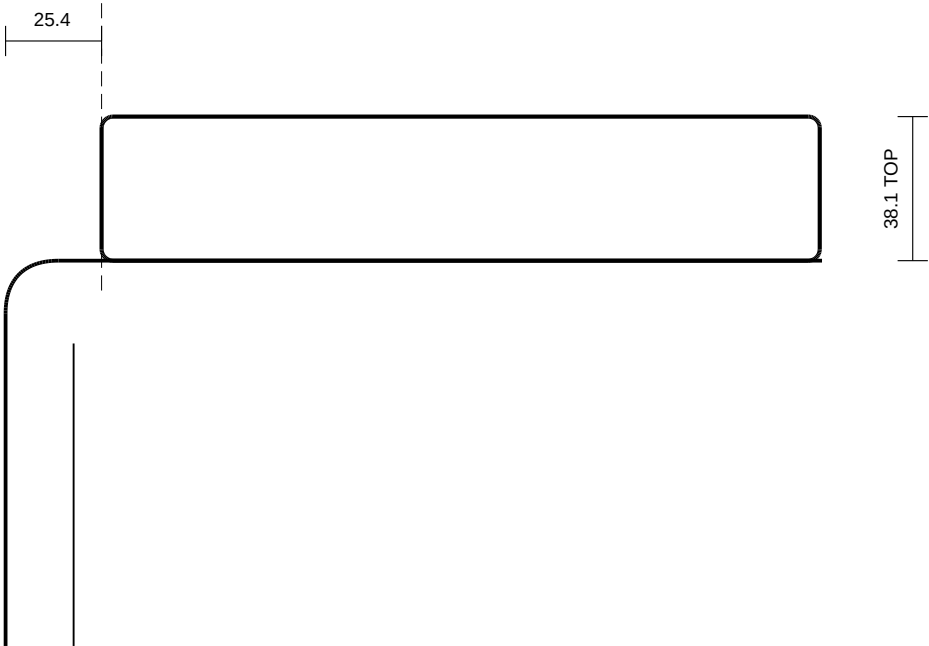

C / LOWER BODY PROJECTS 1 INCH

Upper top edge is set back, not extended.

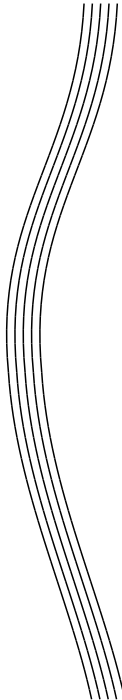

D / SMOOTH RIB PROFILE / NTS

Five ribs; 11 mm centre spacing (P).

Top edge R3 eased; lower shoulder R14 in section; rounded outer body corners R60 (P).

Ribs: 6 mm wide, 4 mm raised relief; smooth tangent flow, no creased or angular joints (P).

Slotted clips secure solid timber; allow seasonal movement across its grain.

DESIGN / CONSTRUCTION NOTES

CORRECTED EDGE RELATIONSHIP

- Lower body projects outward 25.4.
- Top lies inside lower-body boundary.
- The upper surface does not overhang.

C is a section at a straight edge.

Local curve radii are proposed.

Rib detail D shows enlarged form,
not a measured factory template.

Solid timber: 38.1 finished (P).

Balance finish on both faces.

Veneer shaped lower side shells.

Keep LED channel recessed.

No new gold or brass trim assumed.

Desk / component and curve schedule

COMPONENT	QTY	NOMINAL SIZE mm	STATUS
Overall lower body	1	2133.6 x 812.8 x 762	W/D=S; H=P
Inset solid top	1	2082.8 x 762 x 38.1	Derived; T=P
Pedestal envelope	2	457.2 x 812.8 x 723.9	P
Clear knee opening	1	1219.2 wide x 723.9 high	P
Drawer-front pitches	2 sets	145 / 200 / 274.9	P; 3 mm gaps
Drawer runner pairs	6	500 full extension	P
Body / top plan radii	4 each	R60 / R35	P
Face / drawer radii	varies	R40 / R12	P
S-profile ribs	5 / return	6 wide / 11 pitch / 4 relief	P
Plinth height	2	80 nominal	P

Width: 25.4 + 2082.8 + 25.4 = 2133.6. Depth: 25.4 + 762 + 25.4 = 812.8.

Pedestals: 457.2 + 1219.2 + 457.2 = 2133.6. Overall room footprint retained.

Design schedule only; final cut sizes require joinery, finish and hardware allowances.

DESIGN / CONSTRUCTION NOTES

REFERENCE DETAILS RETAINED

Solid timber upper surface.

Broad sculpted lower side cheeks.

Contrasting central modesty panel.

Parallel flowing ribs at transitions.

Rounded top and body corners.


Drawers on both seated sides.

Projection is now reversed correctly.

Final radii and structural details
are proposed, not measured from
the perspective photographs.

Coordinate adjacent attached shelf
with this overall desk envelope.

Bed / straight upholstered design revision

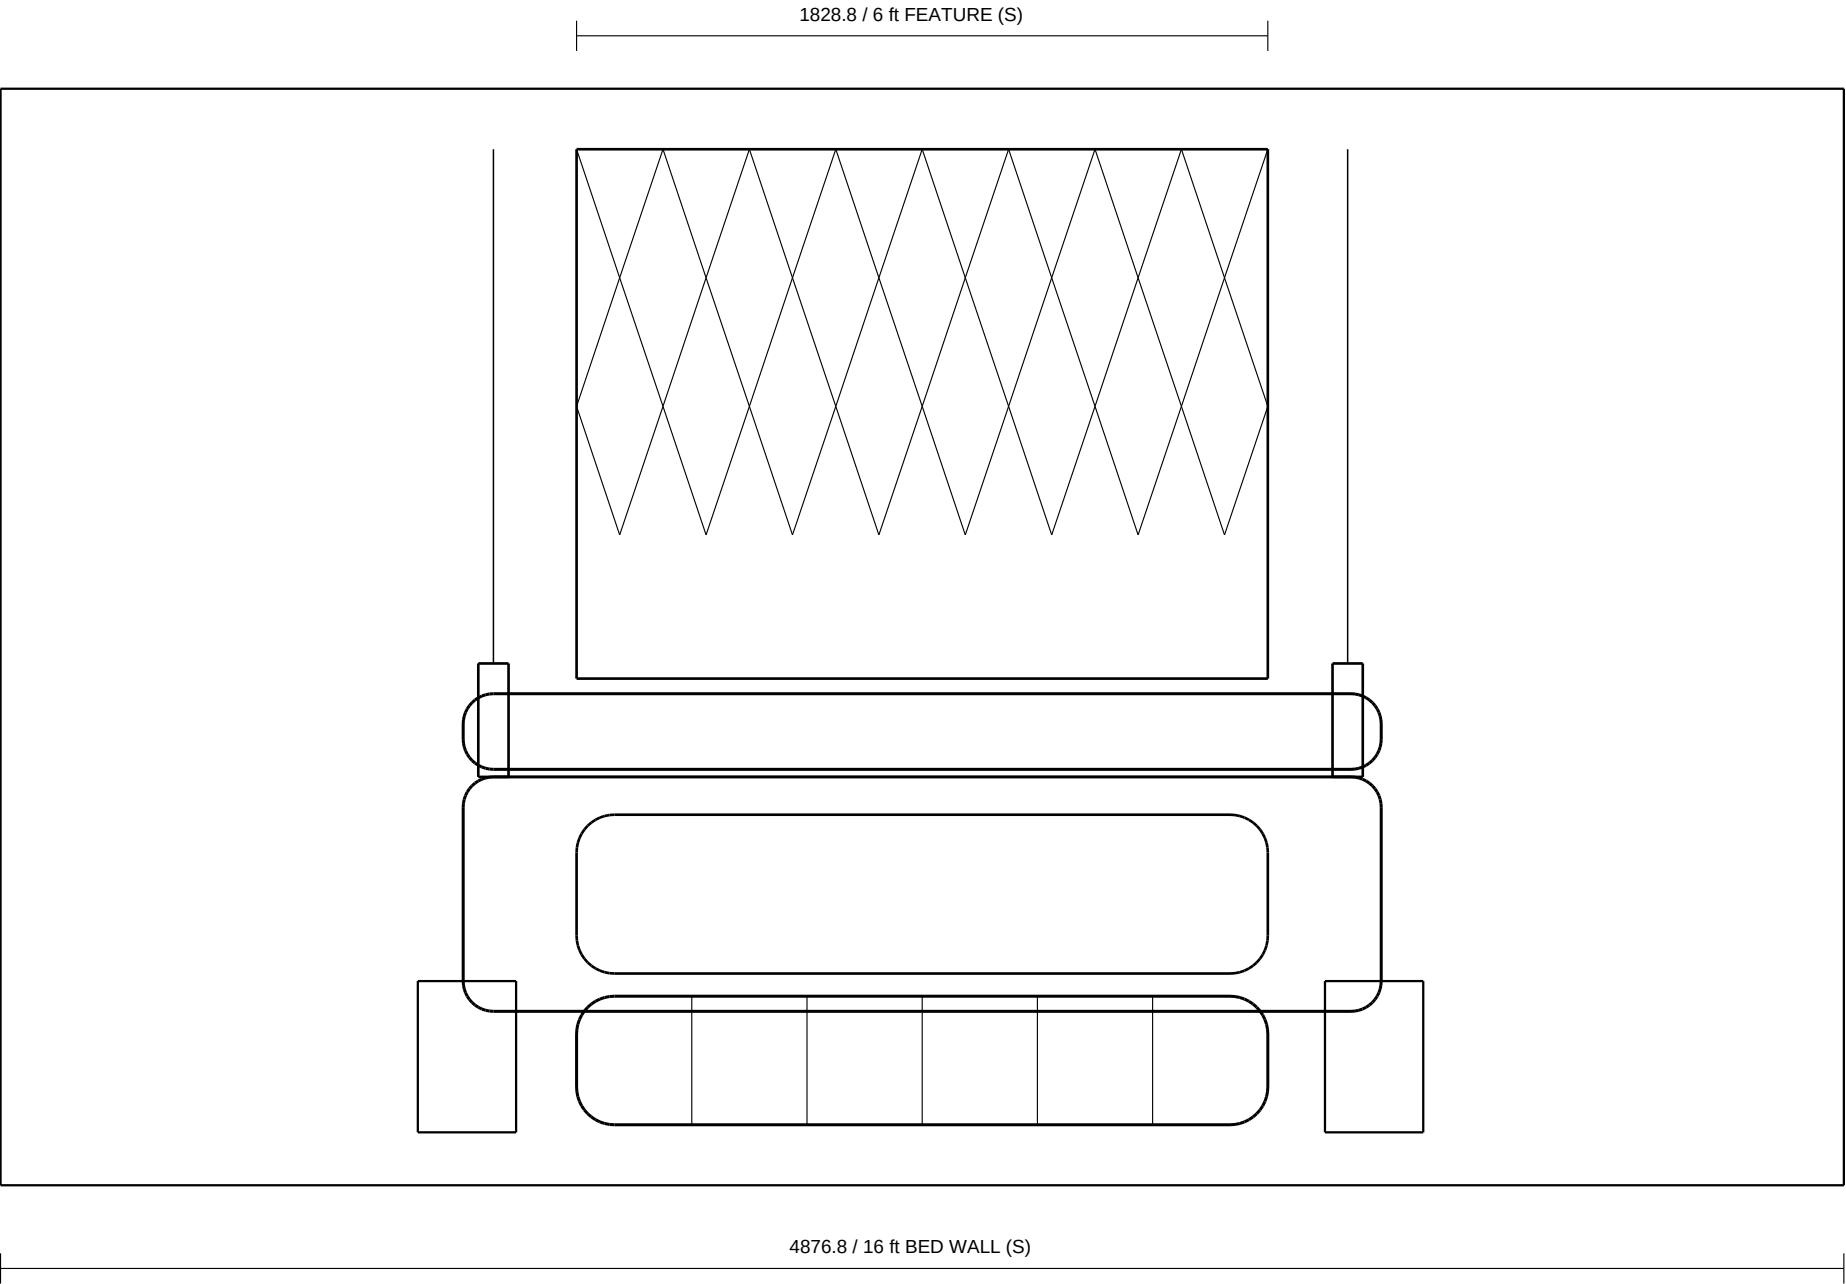

Straight headboard with rounded upholstered edges; no wraparound wings or rotated tables.

Same upholstery on bed rails / footboard, with stitched panel seams; quilting pattern proposed.

DESIGN / CONSTRUCTION NOTES

- 01 Fabric feature width = bed width.
- 02 Centre both on bed centreline.
- 03 Side wall areas: veneer OR textured paint; final selection open.
- 04 Tiered padded headboard follows IMG_3768; no former plan curve.
- 05 Headboard total width 2438 (P).
- 06 Headboard top 1300 (P).
- 07 Bed width 1828.8 supplied.
- 08 Bed length 2133.6 carried (P).
- 09 Quilting seam pitch 304.8 (P).
- 10 Side tables square / unrotated (P).



Hanging elements confirmed as pendant lights, as visible in reference.

No fabric hanging straps are specified.

Use two slim cylindrical pendants.

Pendant drops / wiring by site survey.

Wardrobe / veneer and fabric reversed

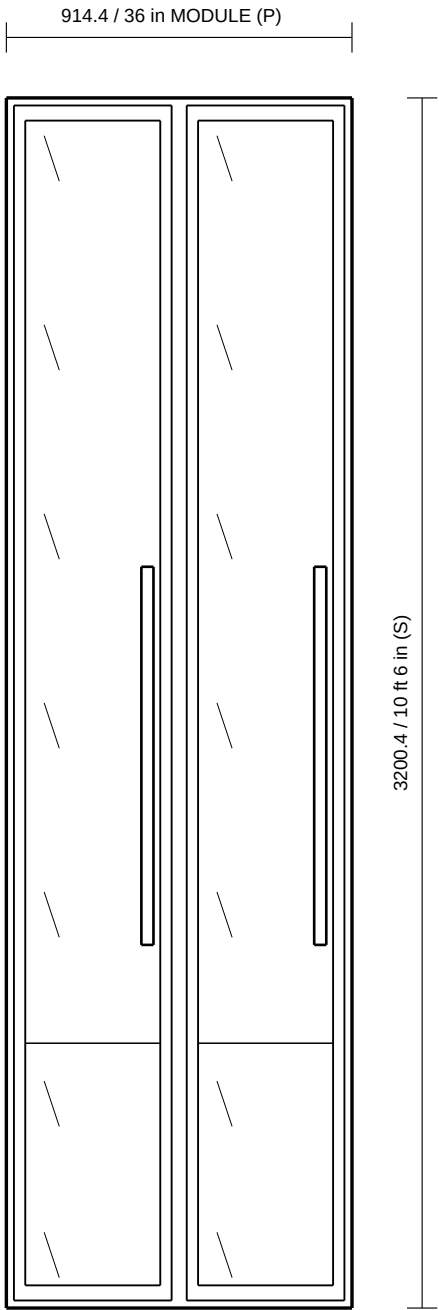

V = LARGE PANEL: WOOD VENEER

F = BORDER + PULL: FABRIC

Typical door at 1:20. Apply finish logic to all runs and curved door, retaining measured footprints.

DESIGN / CONSTRUCTION NOTES

- 01 Reverse IMG_3773 materials.
- 02 Pale fabric field becomes veneer.
- 03 Timber perimeter becomes fabric.
- 04 Timber pull becomes fabric-wrapped.
- 05 Veneer grain vertical and matched.
- 06 Fabric on rigid stable backing.
- 07 Pull: structural core, wrapped finish.
- 08 Fabric thickness added to clearances.
- 09 Border width 50 nominal (P).
- 10 Pull length 1000 nominal (P).

Earlier dark band / silver scheme is superseded by this new door design.

No additional metal inlay assumed.

Full-height door split / straightening hardware to be verified by maker.