


Double transverse: C_{ep} two-angle scans at characteristic kinematics

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_Y = 0.5 \text{ GeV}$, $\max C_{ep} = 0.968$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_Y = 1 \text{ GeV}$, $\max C_{ep} = 0.845$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_Y = 1.8 \text{ GeV}$, $\max C_{ep} = 0.369$

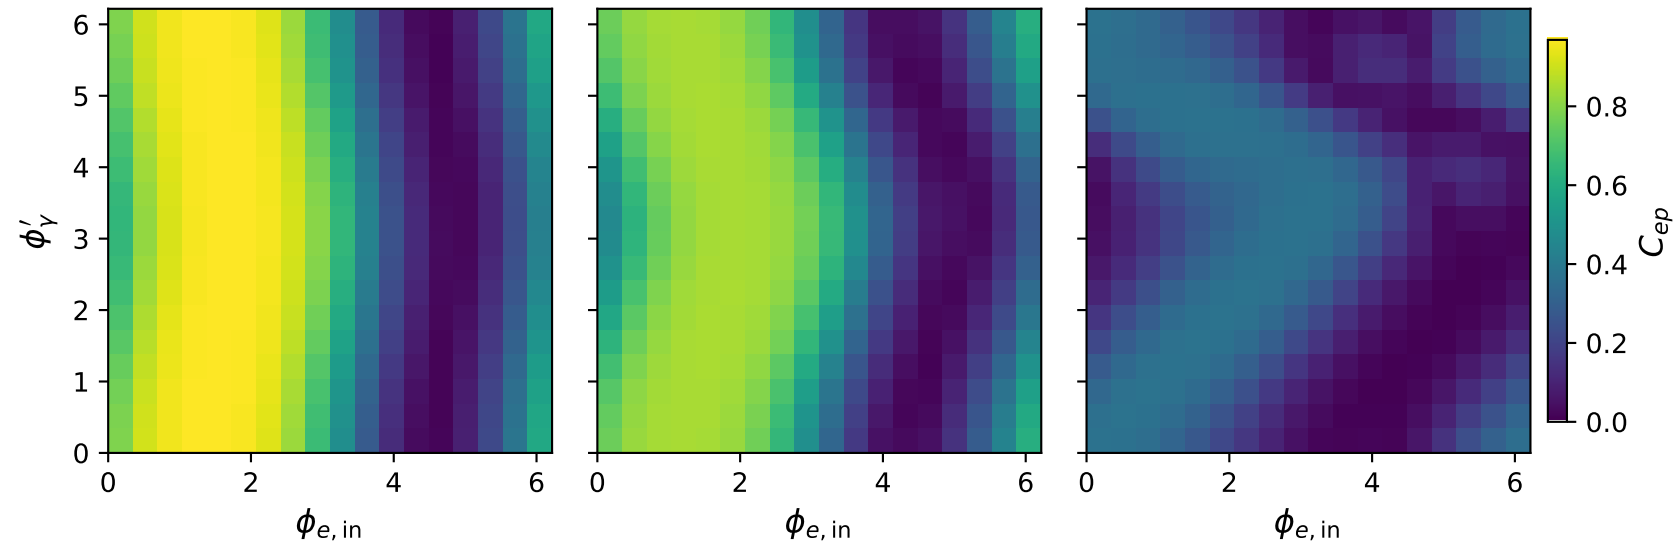


Double transverse: $C_{e\gamma}$ two-angle scans at characteristic kinematics

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 0.5 \text{ GeV}$, $\max C_{e\gamma} = 0.624$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 1 \text{ GeV}$, $\max C_{e\gamma} = 0.706$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 1.8 \text{ GeV}$, $\max C_{e\gamma} = 0.931$

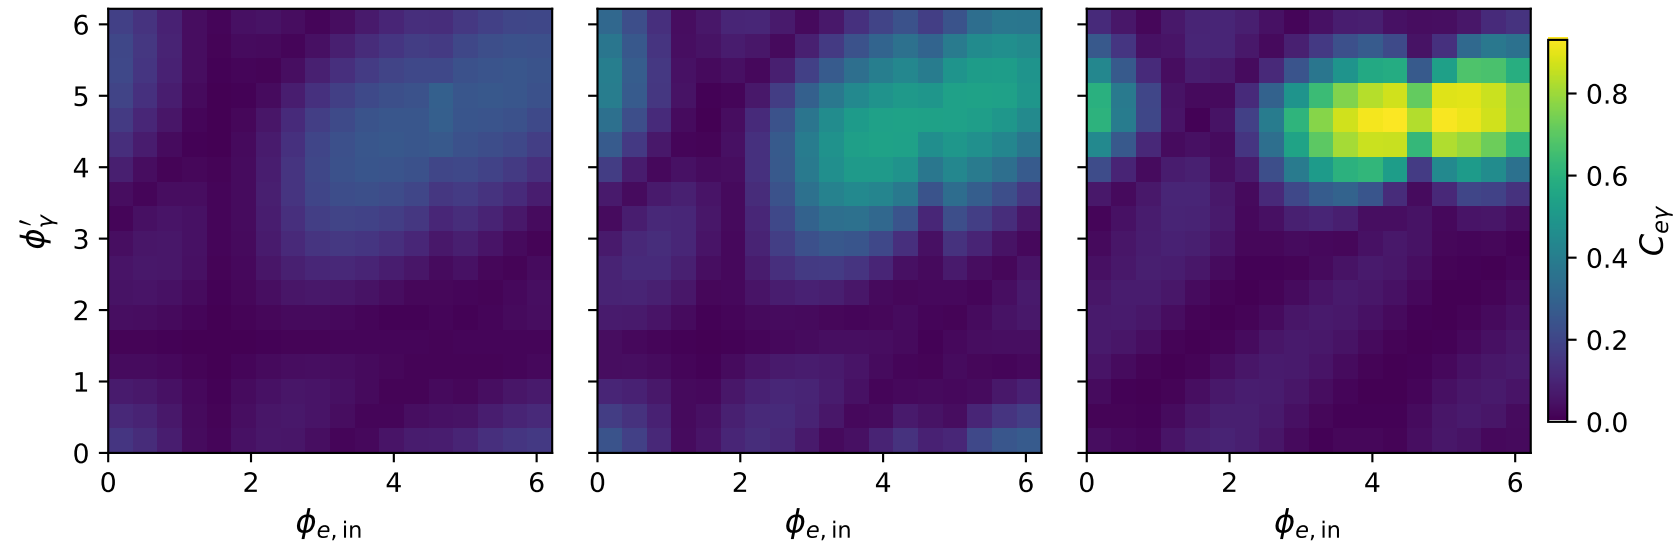


Double transverse: $C_{p\gamma}$ two-angle scans at characteristic kinematics

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 0.5 \text{ GeV}$, $\max C_{p\gamma} = 1.000$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 1 \text{ GeV}$, $\max C_{p\gamma} = 0.999$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 1.8 \text{ GeV}$, $\max C_{p\gamma} = 0.987$

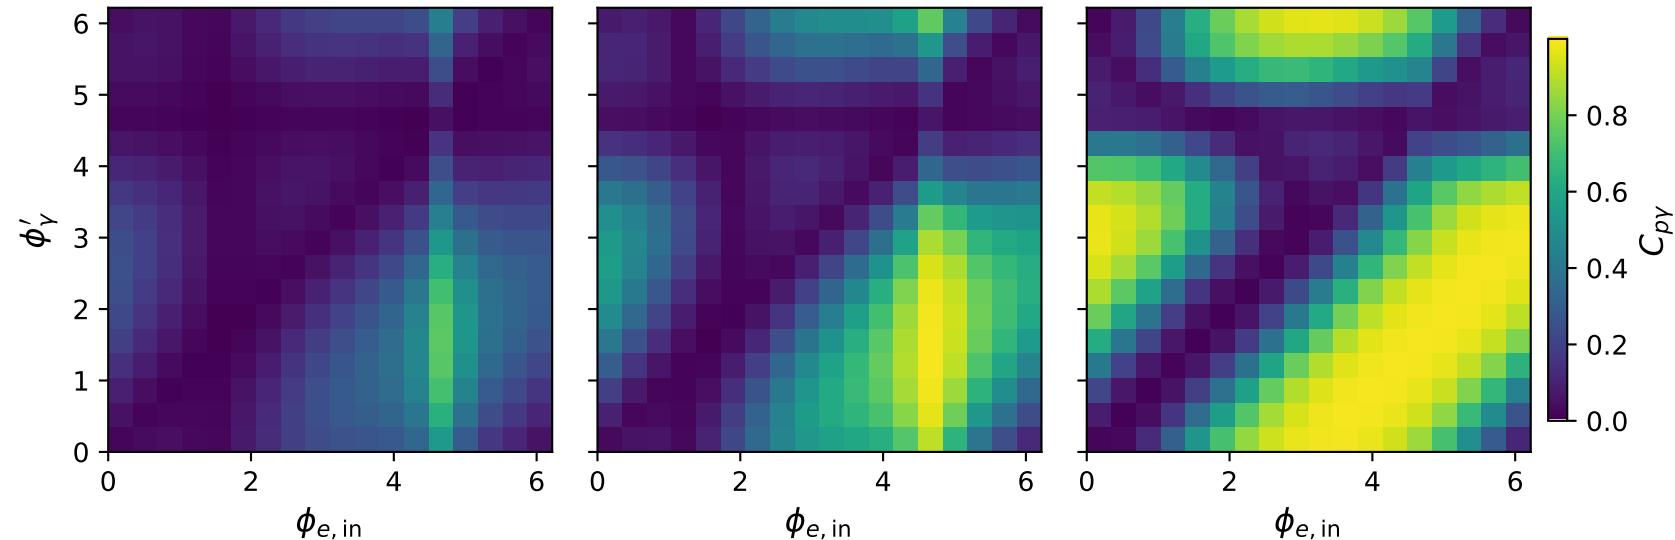


Double transverse: $C_{e|p\gamma}$ two-angle scans at characteristic kinematics

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 0.5 \text{ GeV}$, $\max C_{e|p\gamma} = 1.000$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 1 \text{ GeV}$, $\max C_{e|p\gamma} = 1.000$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 1.8 \text{ GeV}$, $\max C_{e|p\gamma} = 1.000$

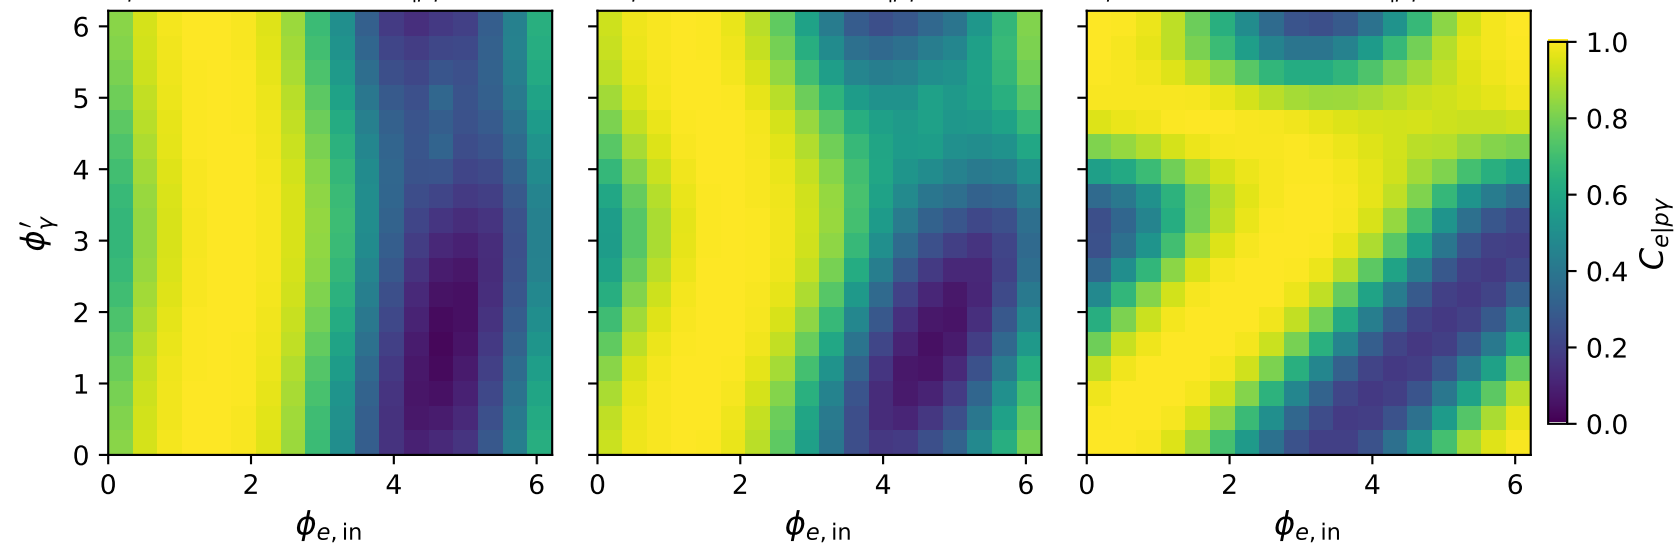


Double transverse: $C_{p|e\gamma}$ two-angle scans at characteristic kinematics

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 0.5 \text{ GeV}$, $\max C_{p|e\gamma} = 1.000$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 1 \text{ GeV}$, $\max C_{p|e\gamma} = 1.000$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 1.8 \text{ GeV}$, $\max C_{p|e\gamma} = 1.000$

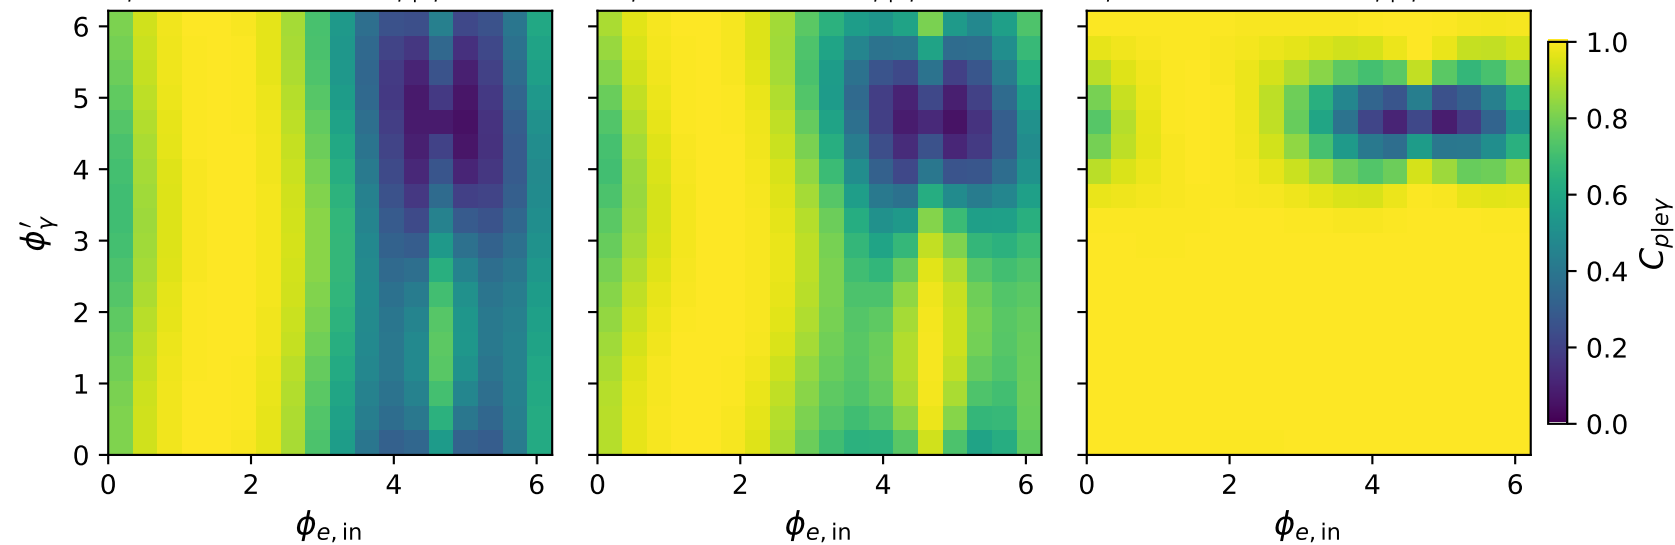


Double transverse: $C_{\gamma|ep}$ two-angle scans at characteristic kinematics

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 0.5 \text{ GeV}$, $\max C_{\gamma|ep} = 1.000$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 1 \text{ GeV}$, $\max C_{\gamma|ep} = 1.000$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 1.8 \text{ GeV}$, $\max C_{\gamma|ep} = 1.000$

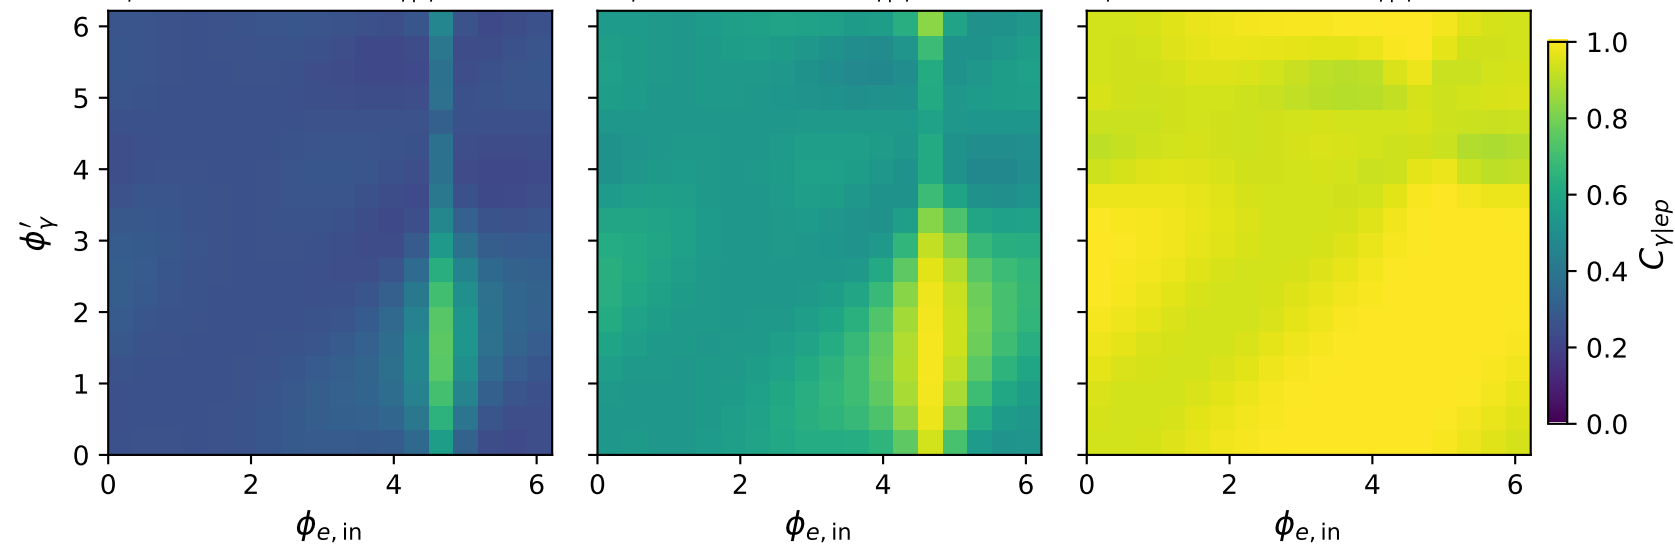


Double transverse: M_e two-angle scans at characteristic kinematics

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_Y = 0.5 \text{ GeV}$, $\max M_e = 0.325$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_Y = 1 \text{ GeV}$, $\max M_e = 0.466$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_Y = 1.8 \text{ GeV}$, $\max M_e = 0.869$

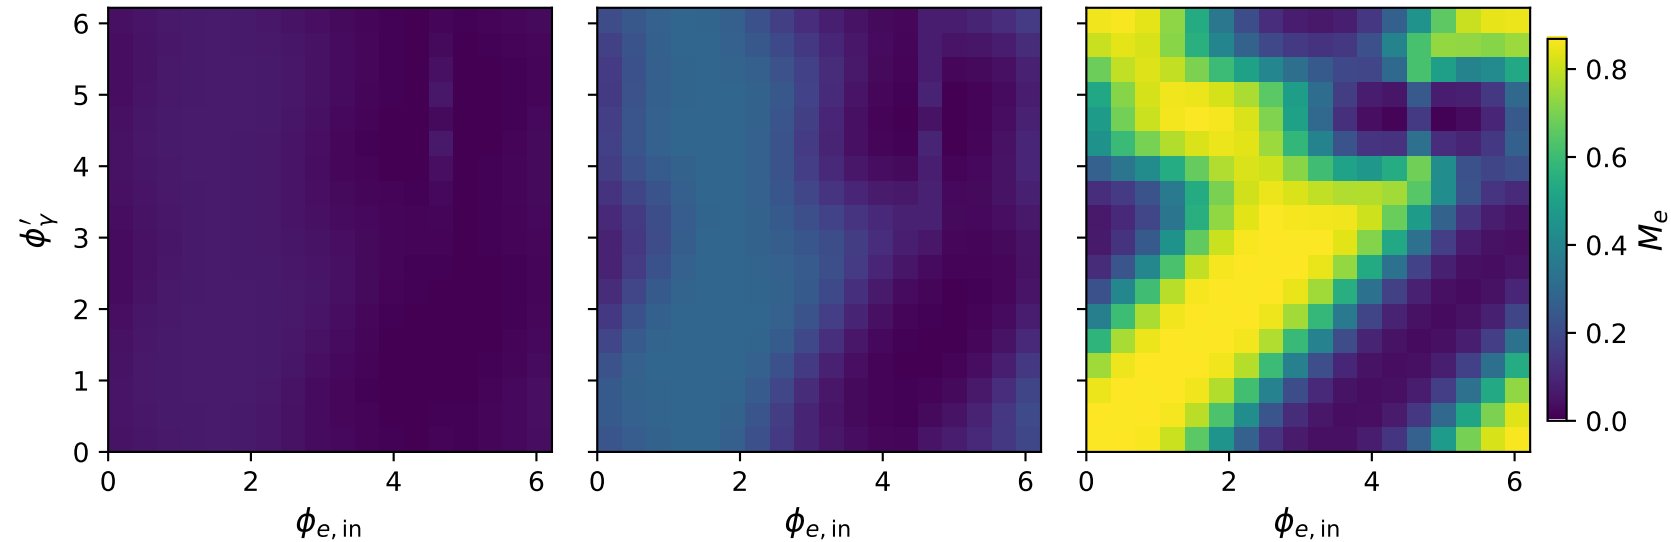


Double transverse: M_p two-angle scans at characteristic kinematics

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_Y = 0.5 \text{ GeV}$, $\max M_p = 0.325$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_Y = 1 \text{ GeV}$, $\max M_p = 0.466$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_Y = 1.8 \text{ GeV}$, $\max M_p = 0.869$

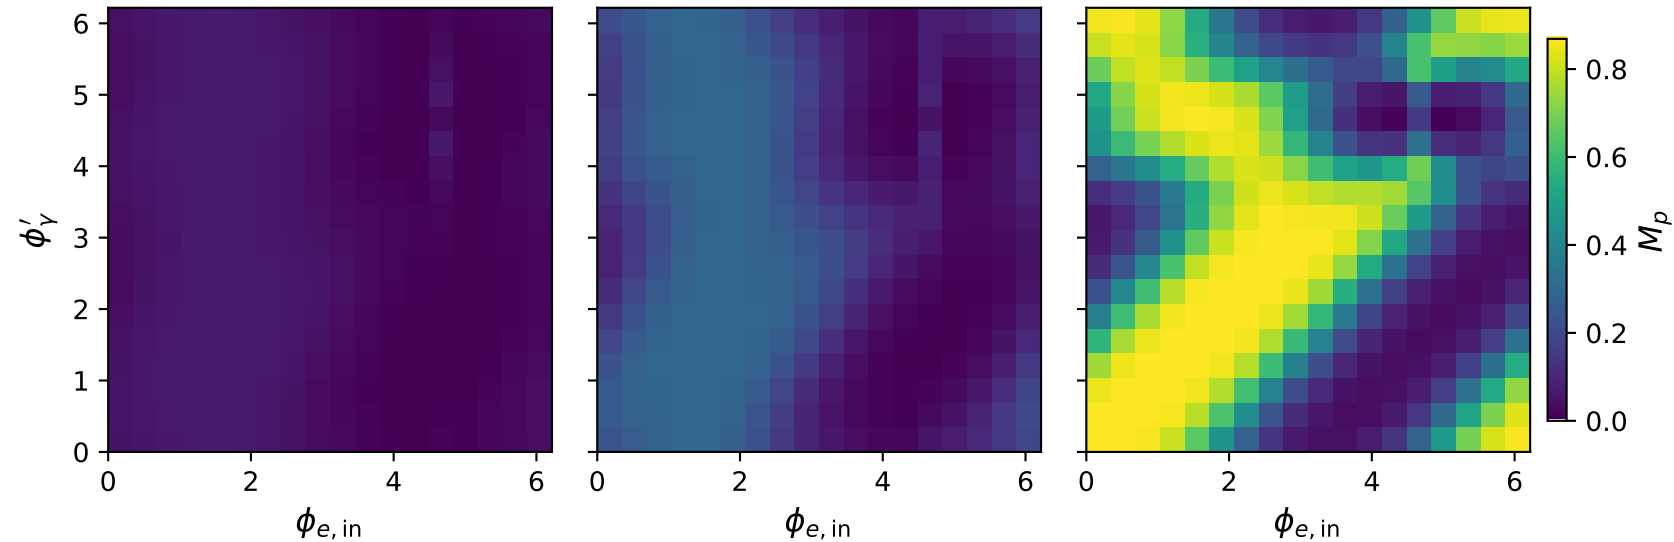


Double transverse: M_Y two-angle scans at characteristic kinematics

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_Y = 0.5 \text{ GeV}$, $\max M_Y = 0.325$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_Y = 1 \text{ GeV}$, $\max M_Y = 0.466$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_Y = 1.8 \text{ GeV}$, $\max M_Y = 0.869$

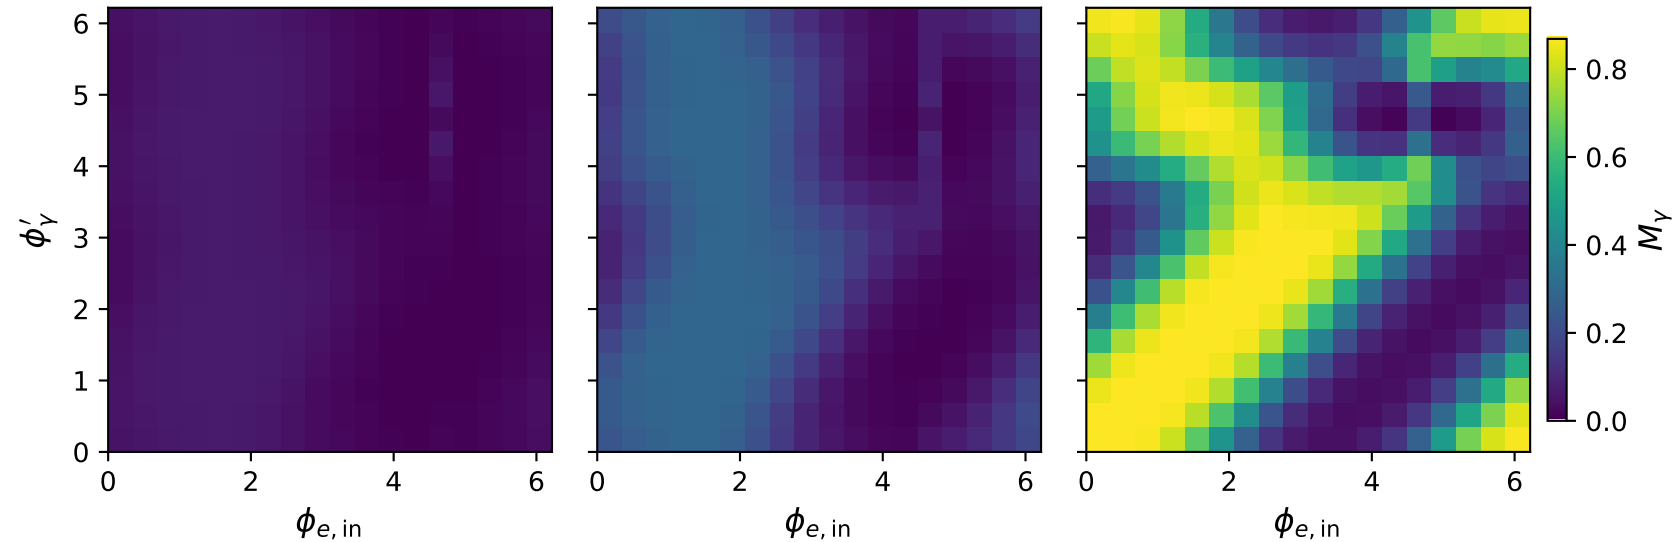

Double transverse: F_3 two-angle scans at characteristic kinematics

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 0.5 \text{ GeV}$, $\max F_3 = 0.627$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 1 \text{ GeV}$, $\max F_3 = 0.730$

$s = 21.5 \text{ GeV}^2$, $\theta_{\text{in}} = 1.57 \text{ rad}$
 $E_\gamma = 1.8 \text{ GeV}$, $\max F_3 = 0.953$

