

适用于隔离式电源的 **SN6505** 低噪声 **1A** 变压器驱动器

1 特性

- 用于变压器的推挽式驱动器
- 宽输入电压范围：2.25V 至 5.5V
- 高输出驱动：5V 电源时为 1A
- 低 R_{ON} ，4.5V 电源时的最大值为 0.25Ω
- 超低 EMI
- 扩频时钟
- 精密内部振荡器选项：160kHz (SN6505A) 和 420kHz (SN6505B)
- 通过外部时钟输入同步多个器件
- 转换率控制
- 1.7A 限流
- 低关断电流：< $1\mu A$
- 热关断
- 宽温度范围：-55°C 至 125°C
- 小型 6 引脚 SOT23 (DBV) 封装
- 具有软启动，可减小浪涌电流

2 应用

- 用于控制器局域网 (CAN)、RS-485、RS-422、RS-232、串行外设接口 (SPI)、I2C、低功耗局域网 (LAN) 的隔离电源
- 低噪声隔离式 USB 电源
- 过程控制
- 电信电源
- 无线电电源
- 分布式电源
- 医疗仪器
- 精密仪器
- 低噪声灯丝电源

3 说明

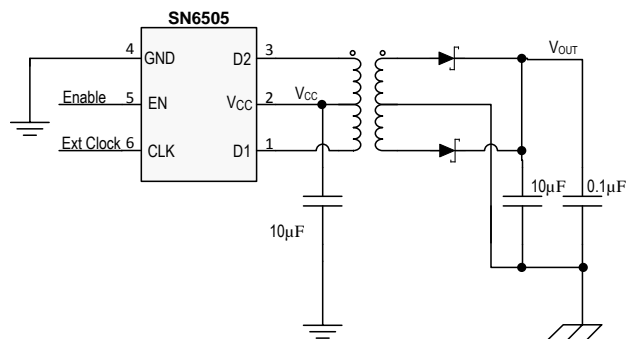
SN6505 是一款低噪声、低 EMI、推挽式变压器驱动器，专为小型隔离式电源而设计。该器件通过 2.25V 至 5V 的直流电源来驱动薄型、中间抽头的变压器。通过输出开关电压的转换速率控制和扩频时钟 (SSC) 可实现超低噪声和 EMI。SN6505 包含一个振荡器，之后是一个栅极驱动器电路，此电路提供补偿输出信号以驱动接地参考 N 通道电源开关。该器件包含两个 1A 电源 MOSFET 开关，确保在重负载条件下正常启动。开关时钟也可由外部提供，这样可确保准确定位开关谐波或者与多个互感器驱动器搭配使用。内部保护功能包括一个 1.7A 的电流限制、欠压锁定、热关断且先断后通型电路。SN6505 具有软启动特性，可防止大负载电容器在上电过程中出现高浪涌电流。SN6505 可采用小型 6 引脚 SOT23/DBV 封装。该器件的运行温度范围为 -55°C 至 125°C。

器件信息⁽¹⁾

| 器件型号 | 封装 | 封装尺寸 (标称值) |
|---------|--------------|-----------------|
| SN6505A | SOT23 (6 引脚) | 2.90mm × 1.60mm |
| SN6505B | | |

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

简化原理图



Copyright © 2016, Texas Instruments Incorporated



目录

| | | | | | |
|----------|--|-----------|-----------|---|-----------|
| 1 | 特性 | 1 | 8.4 | Device Functional Modes..... | 18 |
| 2 | 应用 | 1 | 9 | Application and Implementation | 19 |
| 3 | 说明 | 1 | 9.1 | Application Information..... | 19 |
| 4 | 修订历史记录 | 2 | 9.2 | Typical Application | 20 |
| 5 | Pin Configuration and Functions | 4 | 10 | Power Supply Recommendations | 28 |
| 6 | Specifications | 5 | 11 | Layout | 28 |
| 6.1 | Absolute Maximum Ratings | 5 | 11.1 | Layout Guidelines | 28 |
| 6.2 | ESD Ratings..... | 5 | 11.2 | Layout Example | 28 |
| 6.3 | Recommended Operating Conditions..... | 5 | 12 | 器件和文档支持 | 29 |
| 6.4 | Thermal Information | 5 | 12.1 | 器件支持 | 29 |
| 6.5 | Electrical Characteristics..... | 6 | 12.2 | 文档支持 | 29 |
| 6.6 | Timing Requirements | 7 | 12.3 | 相关链接 | 29 |
| 6.7 | Typical Characteristics, SN6505A | 8 | 12.4 | 接收文档更新通知 | 29 |
| 6.8 | Typical Characteristics, SN6505B | 10 | 12.5 | 社区资源 | 29 |
| 7 | Parameter Measurement Information | 14 | 12.6 | 商标 | 29 |
| 8 | Detailed Description | 16 | 12.7 | 静电放电警告 | 29 |
| 8.1 | Overview | 16 | 12.8 | 术语表 | 29 |
| 8.2 | Functional Block Diagram | 16 | 13 | 机械、封装和可订购信息 | 30 |
| 8.3 | Feature Description..... | 16 | | | |

4 修订历史记录

| Changes from Revision F (September 2016) to Revision G | Page |
|--|-------------|
| • 通篇进行了编辑性更正和修改 | 1 |
| • Added Soft-Start description in Device Functional Modes section | 18 |
| • Changed 3 V to 2.25 V in the description of Drive Capability section | 20 |
| • Changed Schottky diode RB168M-40 to RB168MM-40 in Diode Selection section | 21 |
| • Changed f_{min} to 138 kHz for SN6505A and 363 kHz for SN6505B in V-t Product Calculation section and updated Equation 4 | 22 |
| • Changed load current, V_{DO-max} , V_{O-max} , R_{DS-max} and I_{D-max} values and updated Equation 11 in Turns Ratio Estimate Example | 23 |
| • Changed LDO from 'No' to 'Yes' for transformer ORDER NO. 750313638 and 750313626 in Table 3 | 25 |
| • Updated Figure 48 | 26 |
| • 已更改 静电放电注意事项声明 | 29 |

| Changes from Revision E (August 2016) to Revision F | Page |
|---|-------------|
| • Changed text From: "connected as possible" To: "connected as close as possible" in Power Supply Recommendations | 28 |

| Changes from Revision D (August 2016) to Revision E | Page |
|--|-------------|
| • Changed Table 3 , and added Note 1 | 25 |

| Changes from Revision C (August 2016) to Revision D | Page |
|--|-------------|
| • Typical Characteristics, SN6505A , added Figure 1 and Figure 2 back into the datasheet | 8 |
| • Typical Characteristics, SN6505A , added Figure 9 to Figure 33 back into the datasheet | 8 |
| • Typical Characteristics, SN6505B , added Figure 11 and Figure 12 back into the datasheet | 10 |
| • Typical Characteristics, SN6505B , added Figure 31 and Figure 32 back into the datasheet | 12 |

| | |
|---|--------------------|
| • Changed Table 3 | 25 |
|---|--------------------|

| | |
|--|-------------|
| Changes from Revision B (February 2016) to Revision C | Page |
|--|-------------|

| | |
|--|--------------------|
| • Changed the Typical Characteristics, SN6505A section | 8 |
| • Added the Typical Characteristics, SN6505B section | 10 |
| • Changed Table 3 | 25 |


| | |
|---|-------------|
| Changes from Revision A (October 2015) to Revision B | Page |
|---|-------------|

| | |
|---|-------------------|
| • Changed the Thermal Information table From: 16 Pin DW (SOIC) To: 6 Pin DBV (SOT-23) | 5 |
|---|-------------------|

| | |
|---|-------------|
| Changes from Original (September 2015) to Revision A | Page |
|---|-------------|

| | |
|--------------|-------------------|
| • 量产发布 | 1 |
|--------------|-------------------|

5 Pin Configuration and Functions



Pin Functions

| PIN | | | DESCRIPTION |
|-----------------|-----|------|---|
| NAME | NO. | TYPE | |
| D1 | 1 | O | Open drain output of the first power MOSFETs. Typically connected to the outer terminals of the center tap transformer. Because large currents flow through these pins, their external traces should be kept short. |
| V _{CC} | 2 | P | This is the device supply pin. It should be bypassed with a 4.7 μ F or greater, low ESR capacitor. When V _{CC} \leq 2.25 V, an internal undervoltage lockout circuit trips and turns both outputs off. |
| D2 | 3 | O | Open drain output of the second power MOSFETs. Typically connected to the outer terminals of the center tap transformer. Because large currents flow through these pins, their external traces should be kept short. |
| GND | 4 | P | GND is connected to the source of the power MOSFET switches via an internal sense circuit. Because large currents flow through it, the GND terminals must be connected to a low-inductance quality ground plane. |
| EN | 5 | I | The EN pin turns the device on or off. Grounding or leaving this pin floating disables all internal circuitry. If unused this pin should be tied directly to V _{CC} . |
| CLK | 6 | I | This pin is used to run the device with external clock. Internally it is pulled down to GND. If valid clock is not detected on this pin, the device shifts automatically to internal clock. |

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾. All typical values are at $T_A = 25^\circ\text{C}$, $V_{CC} = 5\text{ V}$.

| | | MIN | MAX | UNIT |
|--------------------------------------|-----------------------------|------|----------------------|------------------|
| Supply voltage ⁽²⁾ | V_{CC} | –0.5 | 6 | V |
| Voltage | EN, CLK | –0.5 | $V_{CC} + 0.5^{(3)}$ | |
| Output switch voltage | D1, D2 | | 16 | V |
| Peak output switch current | $I_{(D1)Pk}$, $I_{(D2)Pk}$ | | 2.4 | A |
| Junction temperature, T_J | | –55 | 150 | $^\circ\text{C}$ |
| Storage temperature range, T_{stg} | | –65 | 150 | $^\circ\text{C}$ |

- (1) Stresses beyond those listed under Absolute Maximum Ratings cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under [Recommended Operating Conditions](#) is not implied. Exposure to absolute-maximum-rated conditions for extended periods affects device reliability.
- (2) All voltage values except differential I/O bus voltages are with respect to the local ground terminal (GND) and are peak voltage values.
- (3) Maximum voltage of 6V.

6.2 ESD Ratings

| | | | VALUE | UNIT |
|-------------|-------------------------|--|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾ | ±6000 | V |
| | | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾ | ±1500 | |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

| | | | MIN | TYP | MAX | UNIT |
|---------------------|--------------------------------------|---|------|-----|------|------------------|
| V_{CC} | Supply voltage | | 2.25 | | 5.5 | V |
| I_{D1} , I_{D2} | Output switch current - Primary side | $2.25\text{ V} < V_{CC} < 2.8\text{ V}$ | | | 0.75 | A |
| | | $2.8\text{ V} < V_{CC} < 5.5\text{ V}$ | | | 1 | |
| T_A | Ambient temperature | | –55 | | 125 | $^\circ\text{C}$ |

6.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | SN6505 | UNIT |
|-------------------------------|--|--------------|--------------------|
| | | DBV (SOT-23) | |
| | | 6 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 137.7 | $^\circ\text{C/W}$ |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 57.7 | $^\circ\text{C/W}$ |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 46.0 | $^\circ\text{C/W}$ |
| ψ_{JT} | Junction-to-top characterization parameter | 13.4 | $^\circ\text{C/W}$ |
| ψ_{JB} | Junction-to-board characterization parameter | 44.9 | $^\circ\text{C/W}$ |
| $R_{\theta JC(bottom)}$ | Junction-to-case(bottom) thermal resistance | N/A | $^\circ\text{C/W}$ |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics application report](#).

6.5 Electrical Characteristics







over full-range of recommended operating conditions, unless otherwise noted. All typical values are at $T_A = 25^\circ\text{C}$, $V_{CC} = 5\text{ V}$.

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------------|---|---|------|------|------|------------------|
| VOLTAGE SUPPLY | | | | | | |
| $I_{(V_{CC})}$ | Supply Current (2.8 V < V_{CC} < 5.5) (SN6505A) | $R_L = 50\ \Omega$ | | 1 | 1.4 | mA |
| | Supply Current (2.8 V < V_{CC} < 5.5) (SN6505B) | $R_L = 50\ \Omega$ | | 1.56 | 2.3 | mA |
| I_{IH} | Leakage Current on EN and CLK pin | EN / CLK = V_{CC} | | 10 | 20 | μA |
| I_{DIS} | V_{CC} current for EN = 0 | | | 0.1 | | μA |
| $I_{LKG(D1)}$ $I_{LKG(D2)}$ | Leakage Current on D1,D2 for EN=0 | Voltage of D1,D2 = V_{CC} | | 0.1 | | μA |
| $V_{CC+ (UVLO)}$ | Positive-going UVLO threshold | | | | 2.25 | V |
| $V_{CC- (UVLO)}$ | Negative-going UVLO threshold | | 1.7 | | | V |
| $V_{HYS (UVLO1)}$ | UVLO threshold hysteresis | | | 0.3 | | V |
| $V_{IN(ON)}$ | EN, CLK pin logic high threshold | | | | 0.7 | V_{CC} |
| $V_{IN(OFF)}$ | EN, CLK pin logic low threshold | | 0.3 | | | V_{CC} |
| $V_{IN(HYS)}$ | EN, CLK pin threshold hysteresis | | | 0.2 | | V_{CC} |
| CLK | | | | | | |
| F_{SW} | D1, D2 average switching Frequency (SN6505A) | $R_L = 50\ \Omega$ to V_{CC} ; Refer to Figure 36 | 138 | 160 | 203 | Khz |
| | D1, D2 average switching Frequency (SN6505B) | $R_L = 50\ \Omega$ to V_{CC} ; Refer to Figure 36 . | 363 | 424 | 517 | kHz |
| $F_{(EXT)}$ | External clock frequency on CLK pin (SN6505A) | | 100 | | 600 | kHz |
| | External clock frequency on CLK pin (SN6505B) | | 100 | | 1600 | kHz |
| OUTPUT STAGE | | | | | | |
| DMM | Average ON time mismatch between D1 and D2 | $R_L = 50\ \Omega$ | | 0% | | |
| $R_{(ON)}$ | Output switch on resistance | $V_{CC} = 4.5\text{ V}$, $ID1, ID2 = 1\text{ A}$ | | 0.16 | 0.25 | Ω |
| | | $V_{CC} = 2.8\text{ V}$, $ID1, ID2 = 1\text{ A}$ | | 0.19 | 0.31 | Ω |
| | | $V_{CC} = 2.25\text{ V}$, $ID1, ID2 = 0.5\text{ A}$ | | 0.21 | 0.45 | Ω |
| $V_{(SLEW)}$ | Voltage slew rates on D1 and D2 for SN6505A | $R_L = 50\ \Omega$ to V_{CC} ; Refer to Figure 36 | | 48 | | V/ μs |
| $I_{(SLEW)}$ | Current slew rates at D1 and D2 for SN6505A | $R_L = 5\ \Omega$ through transformer; Refer to Figure 37 | | 11 | | A/ μs |
| $V_{(SLEWHF)}$ | Voltage slew rates on D1 and D2 for SN6505B | $R_L = 50\ \Omega$ to V_{CC} ; Refer to Figure 36 | | 152 | | V/ μs |
| $I_{(SLEWHF)}$ | Current slew rates at D1 and D2 for SN6505B | $R_L = 5\ \Omega$ through transformer; Refer to Figure 37 | | 41 | | A/ μs |
| I_{LIM} | Current clamp limit (2.8 V < V_{CC} < 5.5V) | | 1.42 | 1.75 | 2.15 | A |
| | Current clamp limit (2.25 V < V_{CC} < 2.8 V) | | 0.65 | | 1.85 | A |
| THERMAL SHUT DOWN | | | | | | |
| T_{SD+} | T_{SD} turn on temperature | | 154 | 168 | 181 | $^\circ\text{C}$ |
| T_{SD-} | T_{SD} turn off temperature | | 135 | 150 | 166 | $^\circ\text{C}$ |
| T_{SD-} | T_{SD} hysteresis | | 13 | 17 | | $^\circ\text{C}$ |

6.6 Timing Requirements

| | | | MIN | NOM | MAX | UNIT |
|---------------------|--|--|-----|------|-----|---------|
| CLK | | | | | | |
| $t_{CLKTIMER}$ | Duration after which device switches to internal clock in case of invalid external clock | | 10 | | 25 | μs |
| OUTPUT STAGE | | | | | | |
| t_{BBM} | Break-before-make time (SN6505A) | Measured as voltage with $R_L = 50 \Omega$ to V_{CC} , Refer to Figure 36 | | 115 | | ns |
| | Break-before-make time (SN6505B) | Measured as voltage with $R_L = 50 \Omega$ to V_{CC} , Refer to Figure 36 | | 90 | | ns |
| SOFT-START | | | | | | |
| t_{SS} | Soft-start time | 10% to 90% transition time on V_{OUT} With transformer $C_{LOAD} = 40 \mu F$ $R_L = 5 \Omega$ | 1 | 4.25 | 8 | ms |
| $t_{SSdelay}$ | Soft-start time delay | From power up to 90% transition time on V_{OUT} With transformer $C_{LOAD} = 40 \mu F$ $R_L = 5 \Omega$ | 3.5 | 8.5 | 18 | ms |

6.7 Typical Characteristics, SN6505A

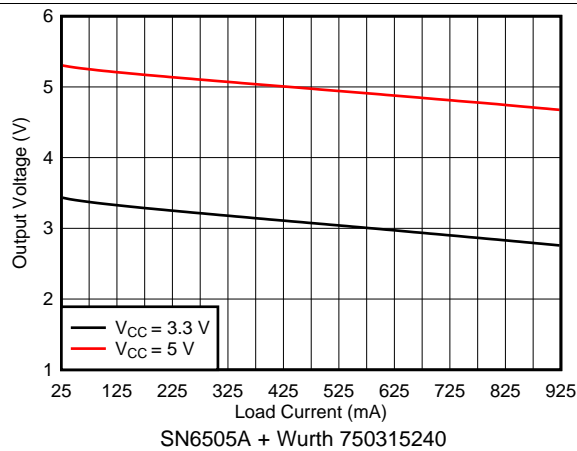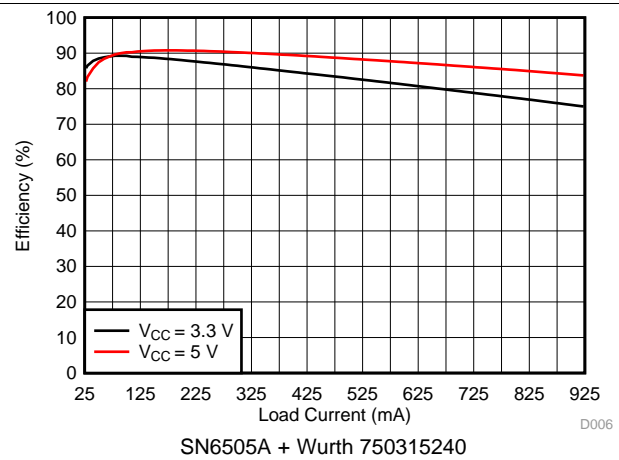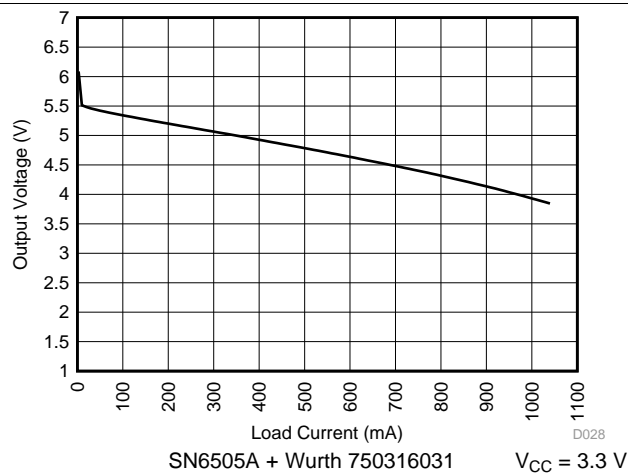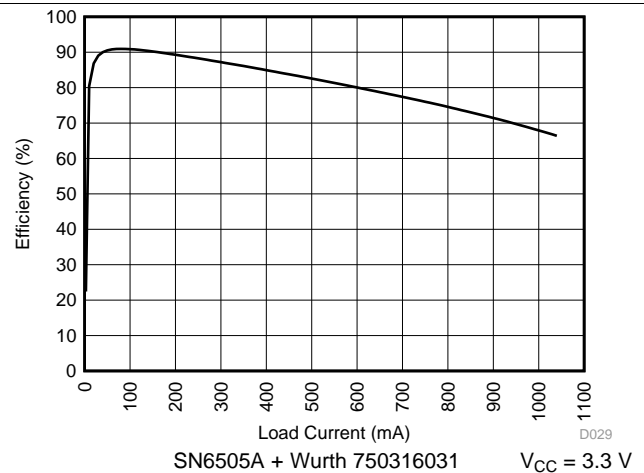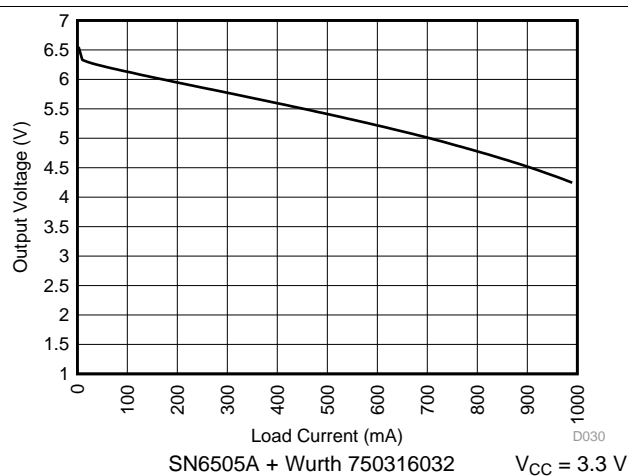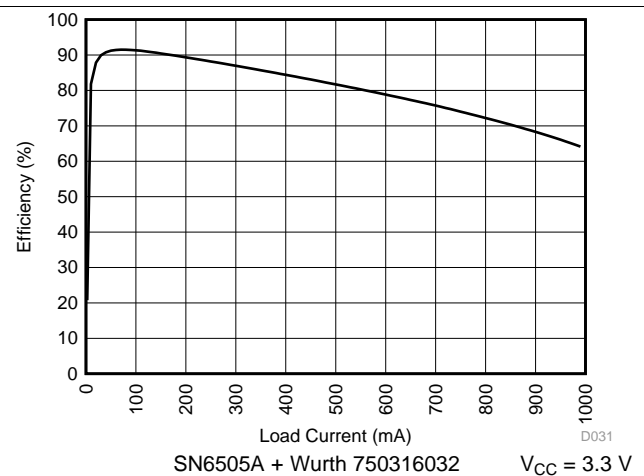
Figure 1. Output Voltage vs Load Current

Figure 2. Efficiency vs Load Current

Figure 3. Output Voltage vs Load Current

Figure 4. Efficiency vs Load Current

Figure 5. Output Voltage vs Load Current

Figure 6. Efficiency vs Load Current

Typical Characteristics, SN6505A (continued)

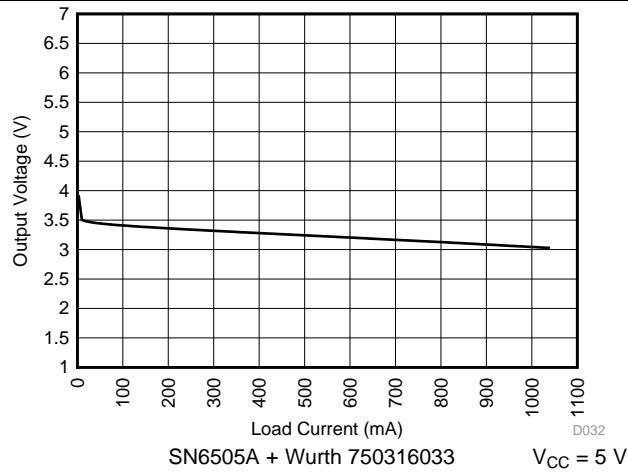


Figure 7. Output Voltage vs Load Current

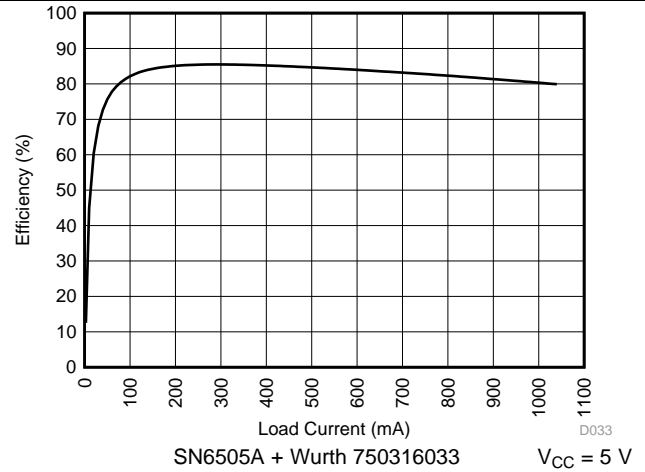


Figure 8. Efficiency vs Load Current

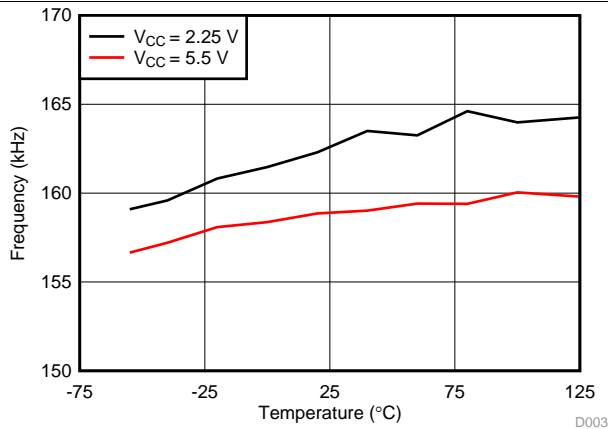


Figure 9. Frequency vs Free-Air Temperature

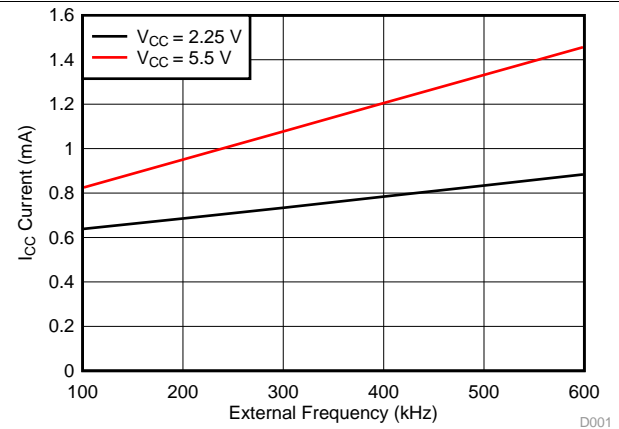


Figure 10. Current vs External Frequency

6.8 Typical Characteristics, SN6505B

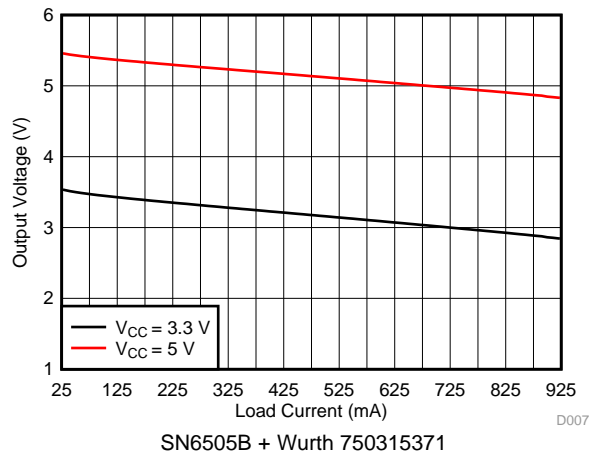


Figure 11. Output Voltage vs Load Current

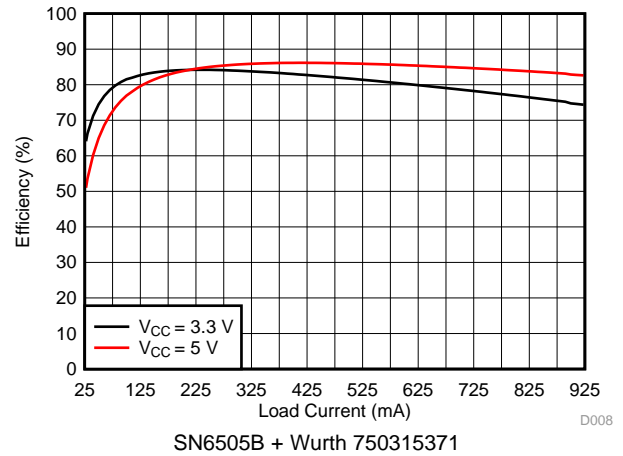


Figure 12. Efficiency vs Load Current

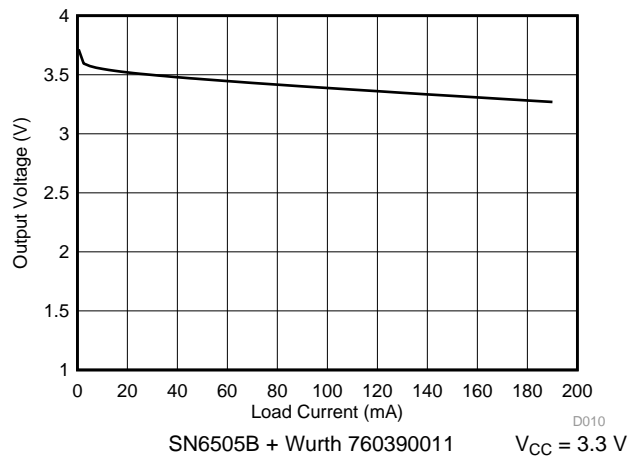


Figure 13. Output Voltage vs Load Current

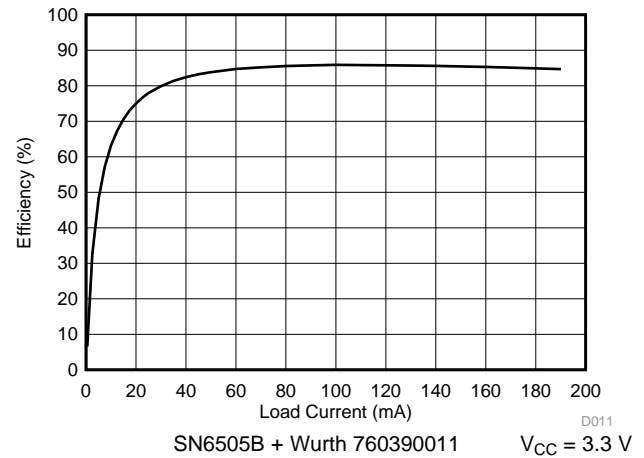


Figure 14. Efficiency vs Load Current

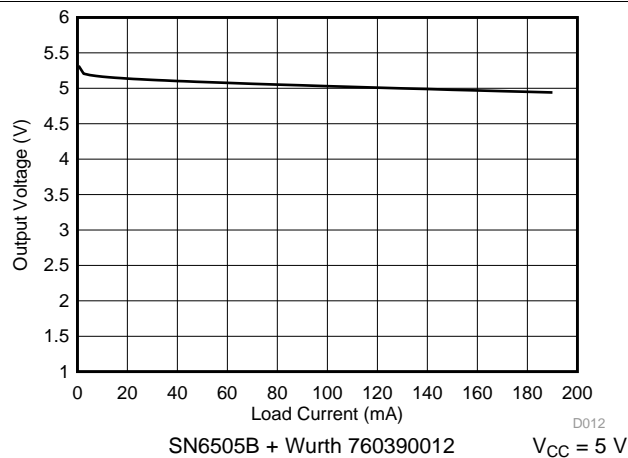


Figure 15. Output Voltage vs Load Current

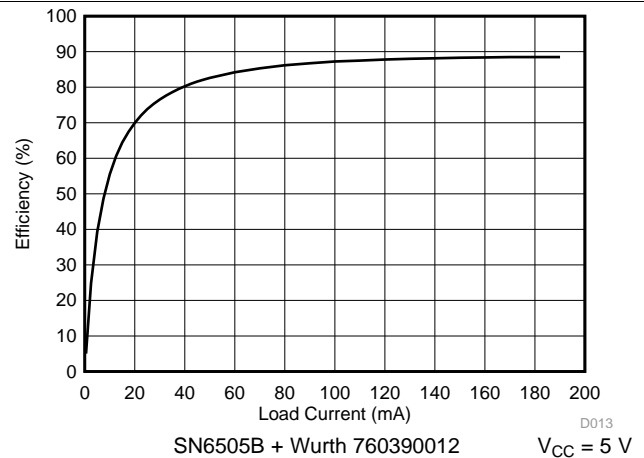


Figure 16. Efficiency vs Load Current

Typical Characteristics, SN6505B (continued)

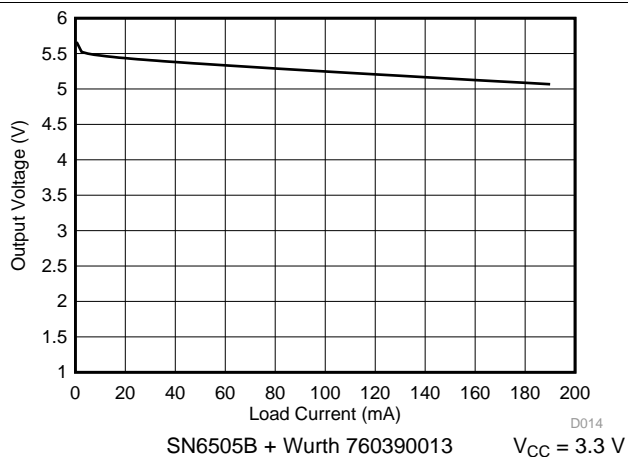


Figure 17. Output Voltage vs Load Current

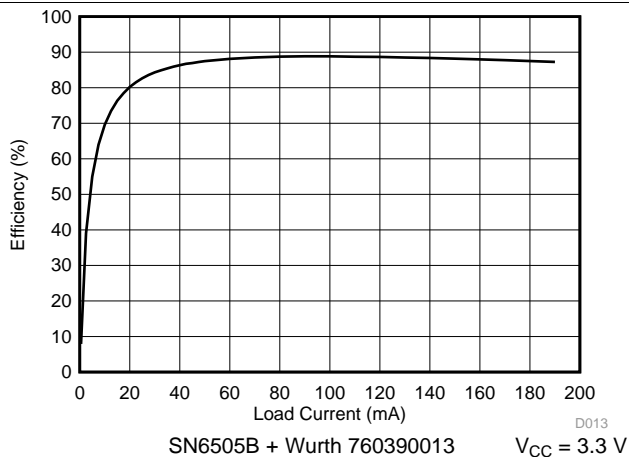


Figure 18. Efficiency vs Load Current

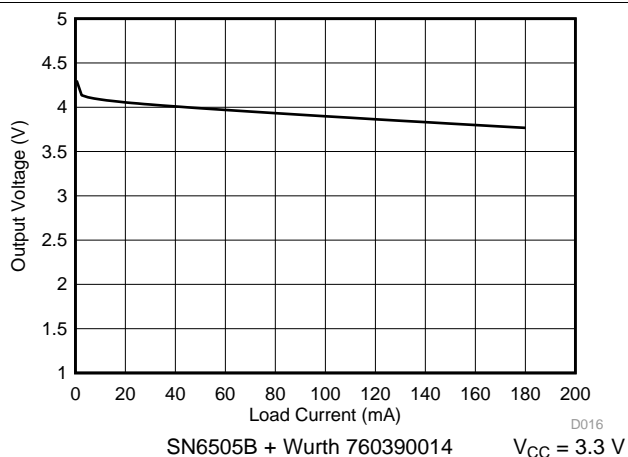


Figure 19. Output Voltage vs Load Current

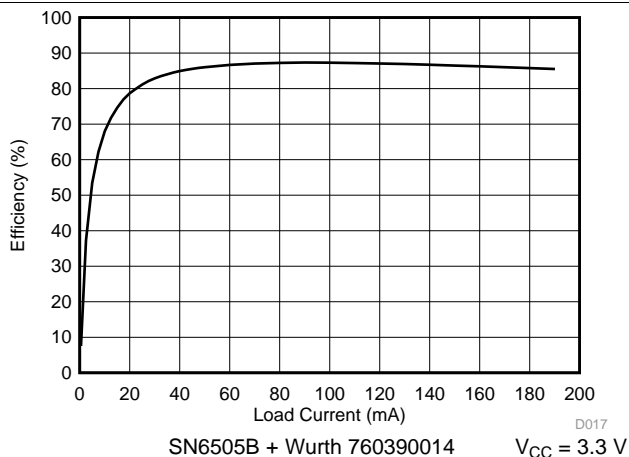


Figure 20. Efficiency vs Load Current

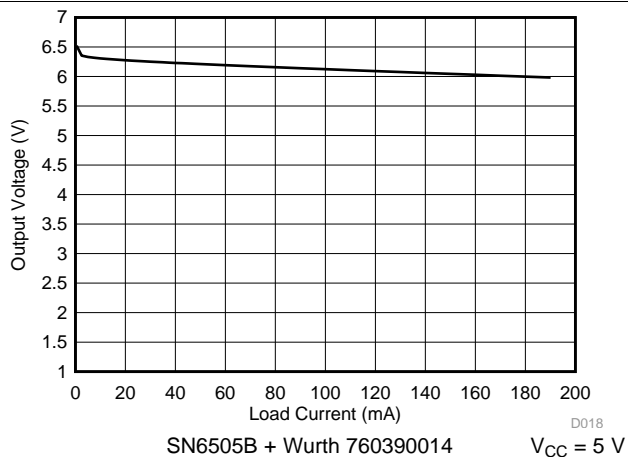


Figure 21. Output Voltage vs Load Current

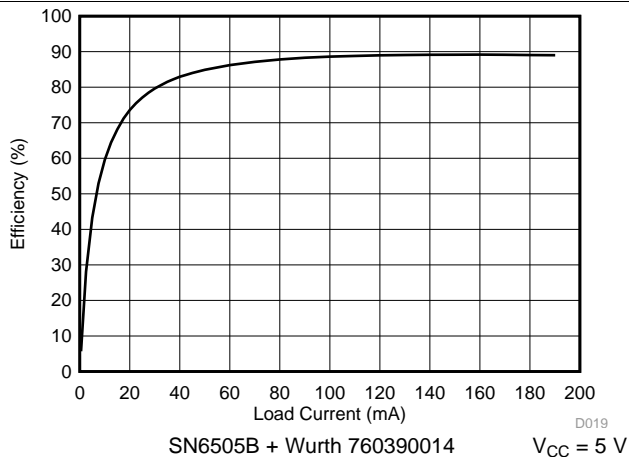
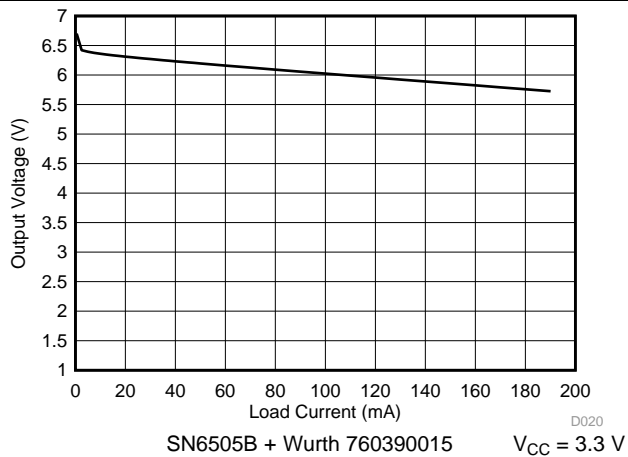
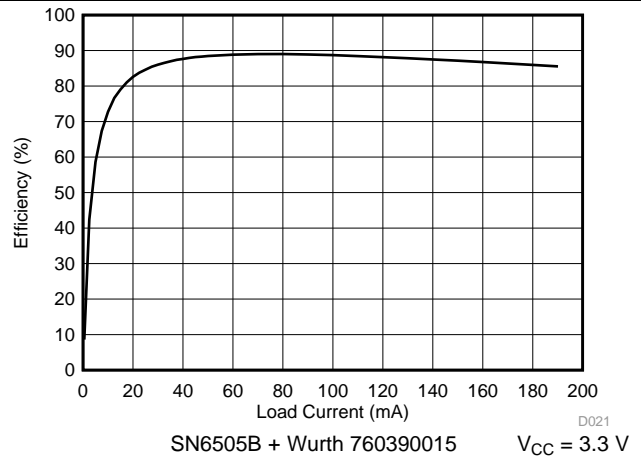
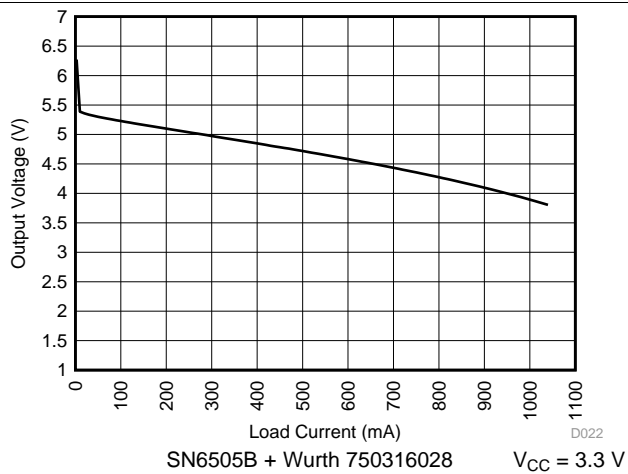
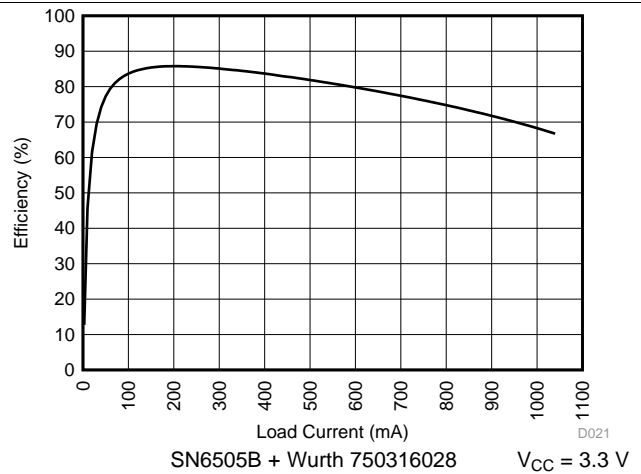
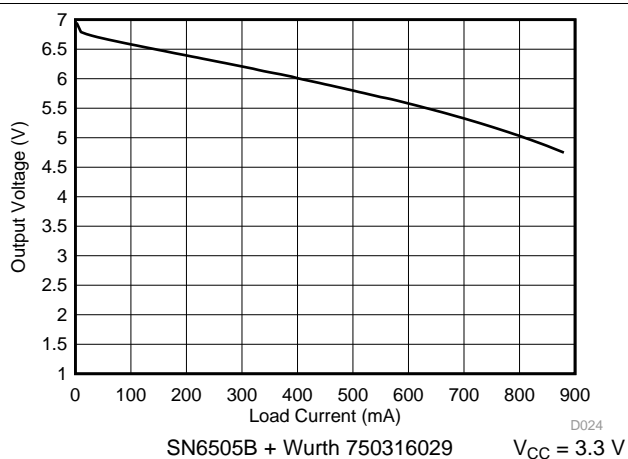
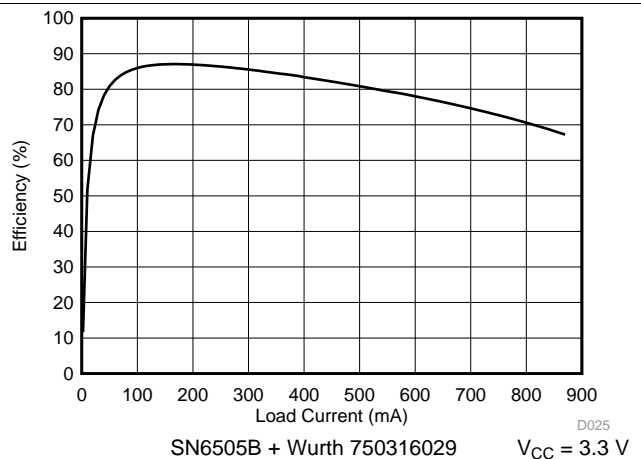


Figure 22. Efficiency vs Load Current

Typical Characteristics, SN6505B (continued)

Figure 23. Output Voltage vs Load Current

Figure 24. Efficiency vs Load Current

Figure 25. Output Voltage vs Load Current

Figure 26. Efficiency vs Load Current

Figure 27. Output Voltage vs Load Current

Figure 28. Efficiency vs Load Current

Typical Characteristics, SN6505B (continued)

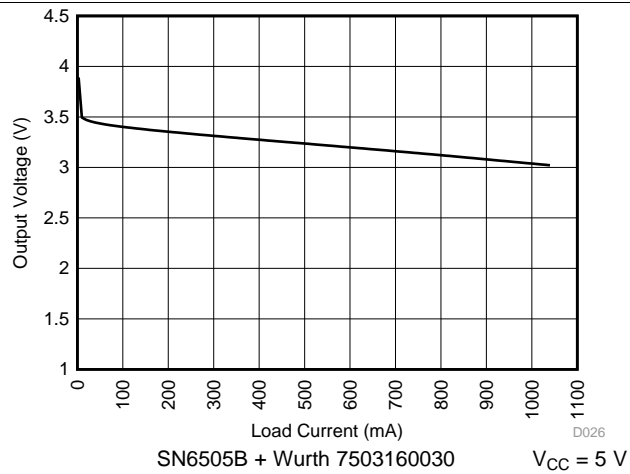


Figure 29. Output Voltage vs Load Current

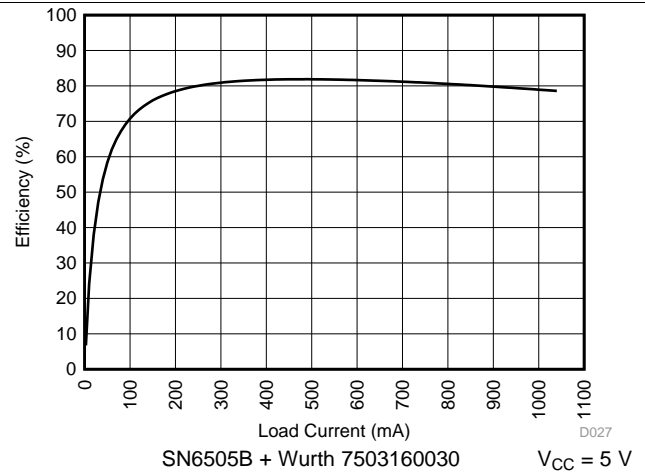


Figure 30. Efficiency vs Load Current

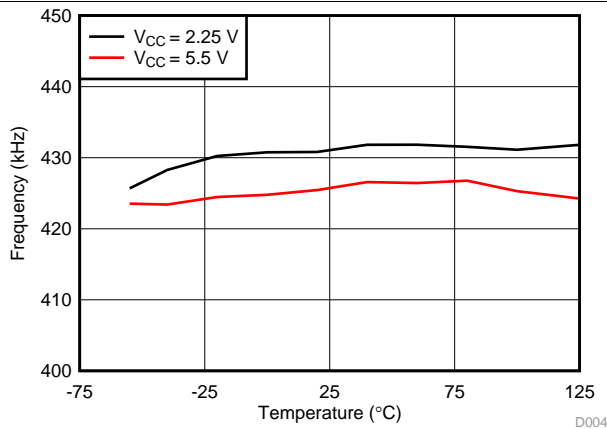


Figure 31. Frequency vs Free-Air Temperature

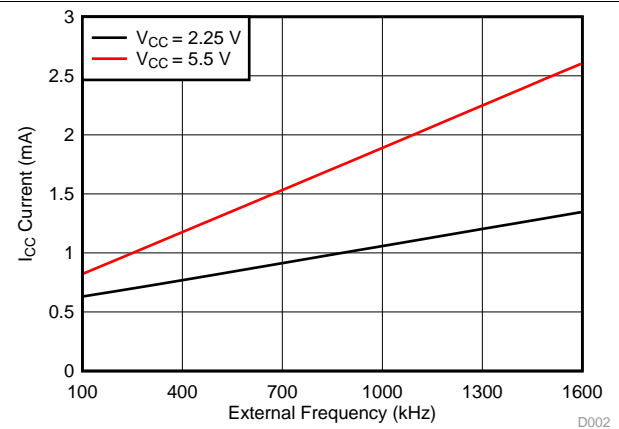


Figure 32. Current vs External Frequency

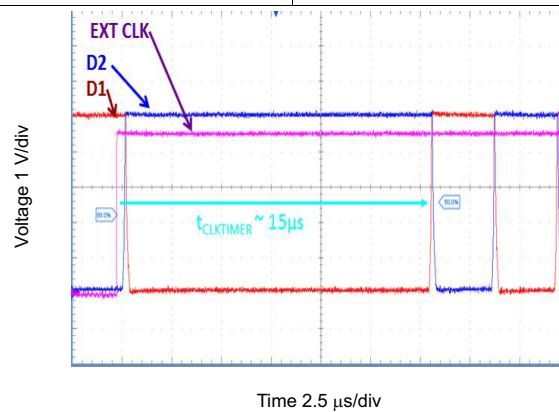


Figure 33. Scope Capture of SN6505 Switching from External to Internal Clock

7 Parameter Measurement Information

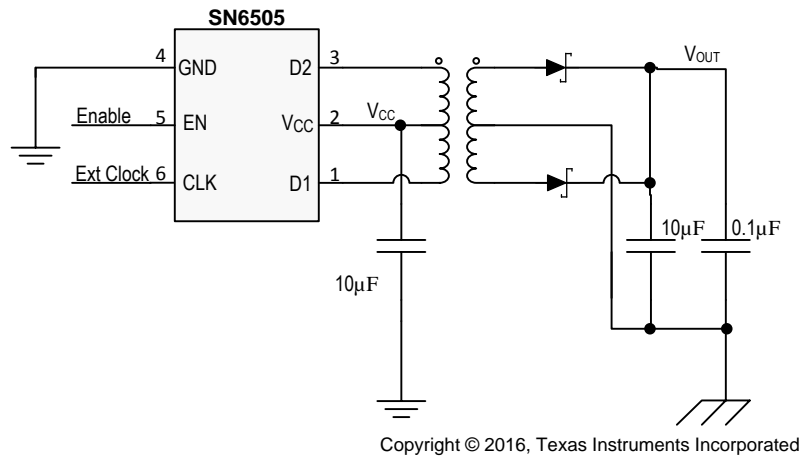


Figure 34. Measurement Circuit for Unregulated Output (TP1)

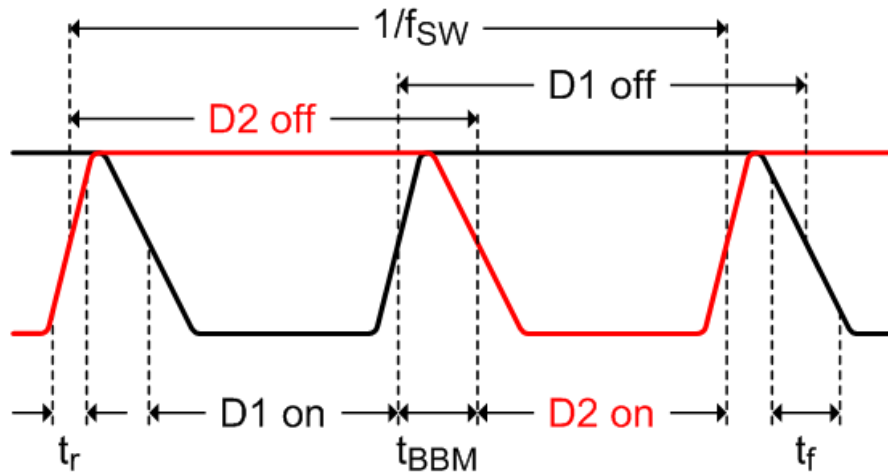


Figure 35. Timing Diagram


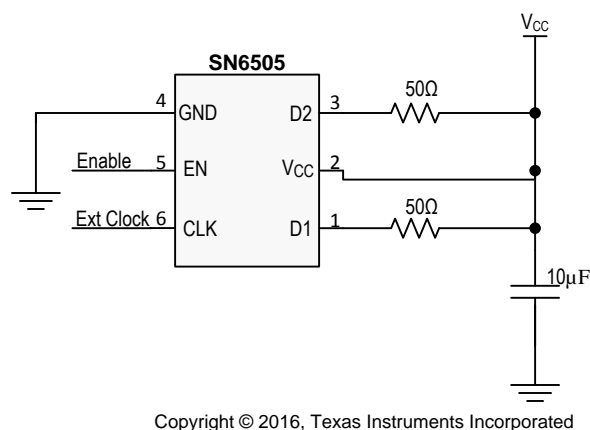


Figure 36. Test Circuit for F_{sw} , $V_{(slew)}$, t_{BBM}

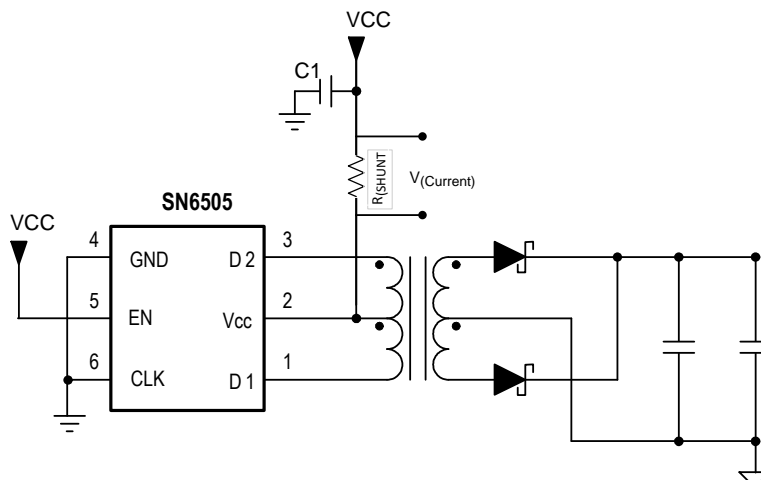Parameter Measurement Information (continued)



Copyright © 2016, Texas Instruments Incorporated

Figure 37. I_{slew} Test Setup

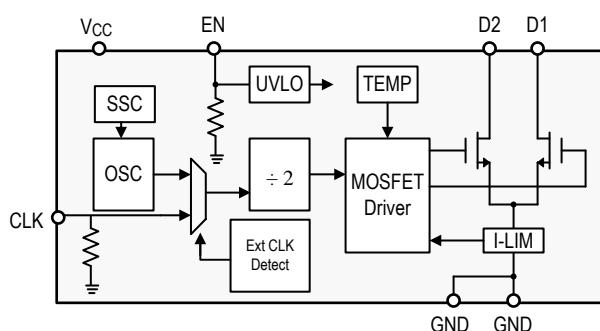
8 Detailed Description

8.1 Overview

The SN6505 is a transformer driver designed for low-cost, small form-factor, isolated DC/DC converters utilizing the push-pull topology. The device includes an oscillator that feeds a gate-drive circuit. The gate-drive, comprising a frequency divider and a break-before-make (BBM) logic, provides two complementary output signals which alternately turn the two output transistors on and off.

The output frequency of the oscillator is divided down by two. A subsequent break-before-make logic inserts a dead-time between the high-pulses of the two signals. Before either one of the gates can assume logic high, the BBM logic ensures a short time period during which both signals are low and both transistors are high-impedance. This short period, is required to avoid shorting out both ends of the primary. The resulting output signals, present the gate-drive signals for the output transistors.

8.2 Functional Block Diagram



Copyright © 2016, Texas Instruments Incorporated

8.3 Feature Description

8.3.1 Push-Pull Converter

Push-pull converters require transformers with center-taps to transfer power from the primary to the secondary (see Figure 38).

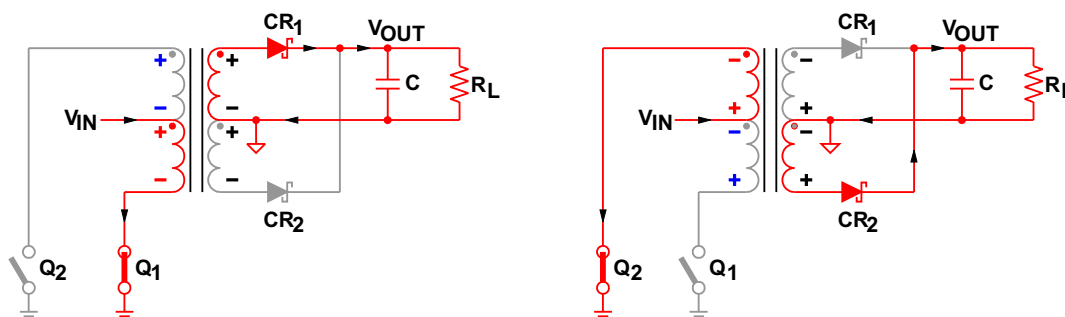


Figure 38. Switching Cycles of a Push-Pull Converter

When Q_1 conducts, V_{IN} drives a current through the lower half of the primary to ground, thus creating a negative voltage potential at the lower primary end with regards to the V_{IN} potential at the center-tap.

At the same time the voltage across the upper half of the primary is such that the upper primary end is positive with regards to the center-tap in order to maintain the previously established current flow through Q_2 , which now has turned high-impedance. The two voltage sources, each of which equaling V_{IN} , appear in series and cause a voltage potential at the open end of the primary of $2 \times V_{IN}$ with regards to ground.

Feature Description (continued)

Per dot convention the same voltage polarities that occur at the primary also occur at the secondary. The positive potential of the upper secondary end therefore forward biases diode CR_1 . The secondary current starting from the upper secondary end flows through CR_1 , charges capacitor C, and returns through the load impedance R_L back to the center-tap.

When Q_2 conducts, Q_1 goes high-impedance and the voltage polarities at the primary and secondary reverse. Now the lower end of the primary presents the open end with a $2 \times V_{IN}$ potential against ground. In this case CR_2 is forward biased while CR_1 is reverse biased and current flows from the lower secondary end through CR_2 , charging the capacitor and returning through the load to the center-tap.

8.3.2 Core Magnetization

Figure 39 shows the ideal magnetizing curve for a push-pull converter with B as the magnetic flux density and H as the magnetic field strength. When Q_1 conducts the magnetic flux is pushed from A to A', and when Q_2 conducts the flux is pulled back from A' to A. The difference in flux and thus in flux density is proportional to the product of the primary voltage, V_P , and the time, t_{ON} , it is applied to the primary: $B \approx V_P \times t_{ON}$.

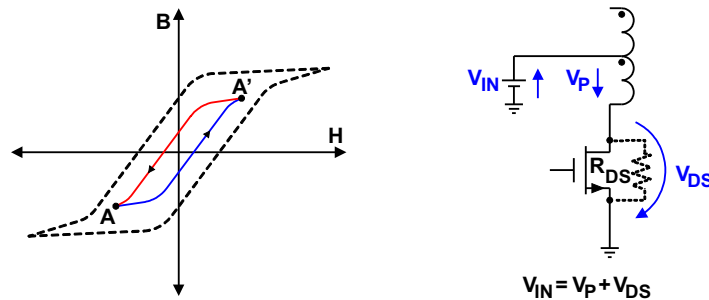


Figure 39. Core Magnetization and Self-Regulation Through Positive Temperature Coefficient of $R_{DS(on)}$

This volt-seconds (V-t) product is important as it determines the core magnetization during each switching cycle. If the V-t products of both phases are not identical, an imbalance in flux density swing results with an offset from the origin of the B-H curve. If balance is not restored, the offset increases with each following cycle and the transformer slowly creeps toward the saturation region.

8.4 Device Functional Modes

The functional modes of the device are divided into start-up, operating, and off-mode.

8.4.1 Start-Up Mode

When the supply voltage at V_{CC} ramps up to 2.25 V, the internal oscillator starts operating. The output stage begins switching but the amplitude of the drain signals at D1 and D2 has not reached its full maximum yet.

8.4.1.1 Soft-Start

SN6505A and SN6505B devices support soft-start feature. Upon power up or when EN pin transitions from Low to High, the gate drive of the output power-MOSFET is gradually increased over a period of time from 0 V to V_{CC} . Soft-start prevents high inrush current from V_{CC} while charging large secondary side decoupling capacitors, and also prevents overshoot in secondary voltage during power-up.

8.4.2 Operating Mode

When the device supply has reached its nominal value $\pm 10\%$ the oscillator is fully operating. However variations over supply voltage and operating temperature can vary the switching frequencies at D1 and D2.

8.4.3 Shutdown-Mode

The device has a dedicated enable pin to put the device in very low power mode to save power when not in use. Enable pin has an internal pull down resistor which keeps device disabled when not driven. When disabled or when V_{CC} is < 1.7 V, both drain outputs, D1 and D2, are tri-stated.

8.4.4 Spread Spectrum Clocking

Radiated emissions is an important concern in high current switching power supplies. SN6505 addresses this by modulating its internal clock in such a way that the emitting energy is spread over multiple frequency bins. This Spread Spectrum clocking feature greatly improves the emissions performance of the entire power supply block and hence relieves the system designer from one major concern in isolated power supply design.

8.4.5 External Clock Mode

The SN6505 has a CLK pin which can be used to synchronize the device with system clock and in turn with other SN6505 devices so that the system can control the exact switching frequency of the device. The Rising edge of the CLK is used to divide a clock by two and used to drive the gates. Figure 41 shows the timing diagram for the same. The device also has external clock fail safe feature which automatically switches the device to the internal clock if a valid input clock is not present for long ($t_{CLKTIMER}$). The in-built emissions reduction scheme of Spread Spectrum clocking is disabled when external clock is present.

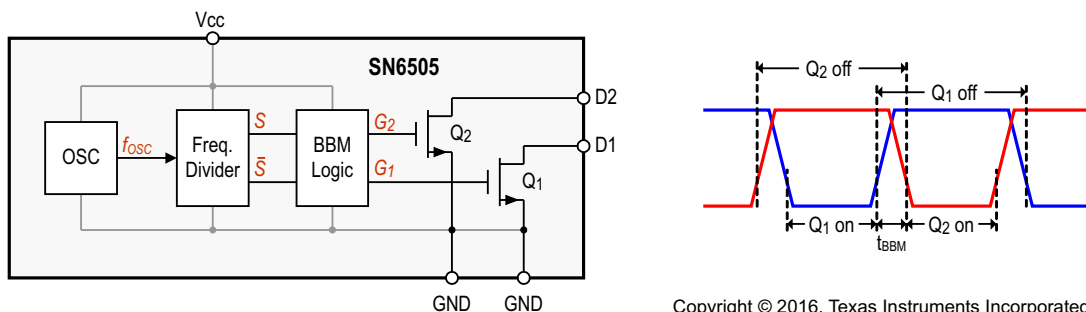
9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

The SN6505 is a transformer driver designed for low-cost, small form-factor, isolated DC/DC converters using the push-pull topology. The device includes an oscillator that feeds a gate-drive circuit. The gate-drive, comprising a frequency divider and a break-before-make (BBM) logic, provides two complementary output signals which alternately turn the two output transistors on and off.



Copyright © 2016, Texas Instruments Incorporated

Figure 40. Block Diagram and Output Timing With Break-Before-Make Action

The output frequency of the oscillator is divided down by an asynchronous divider that provides two complementary output signals, S and \bar{S} , with a 50% duty cycle. A subsequent break-before-make logic inserts a dead-time between the high-pulses of the two signals. The resulting output signals, G₁ and G₂, present the gate-drive signals for the output transistors Q₁ and Q₂. As shown in Figure 41, before either one of the gates can assume logic high, there must be a short time period during which both signals are low and both transistors are high-impedance. This short period, known as break-before-make time, is required to avoid shorting out both ends of the primary.


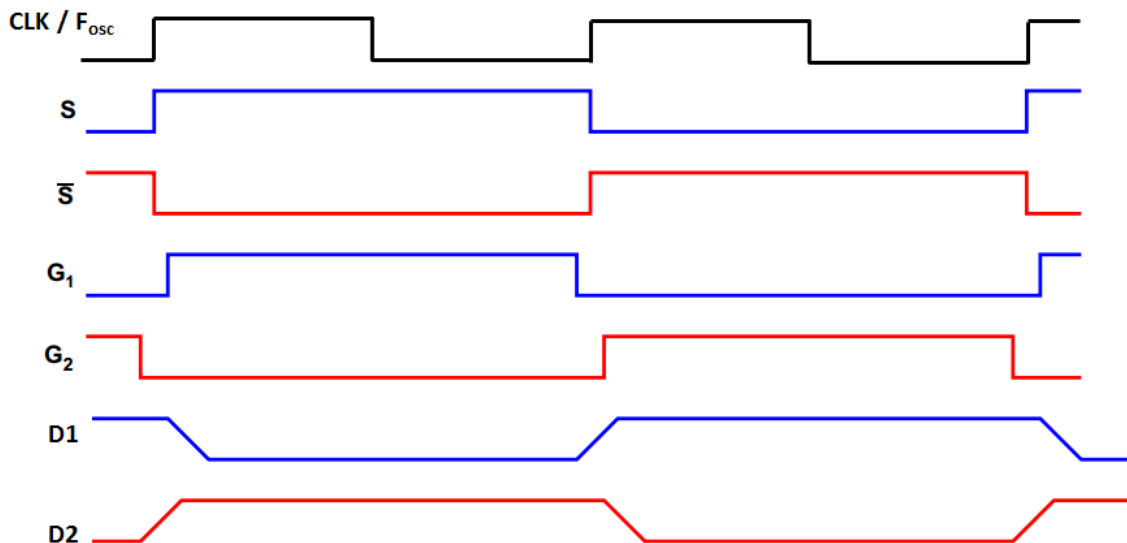


Figure 41. Detailed Output Signal Waveforms

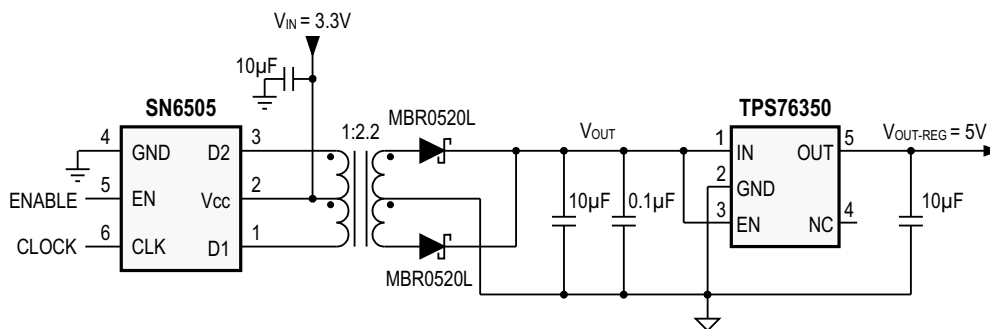9.2 Typical Application



Copyright © 2016, Texas Instruments Incorporated

Figure 42. Typical Application Schematic

9.2.1 Design Requirements

For this design example, use the parameters listed in [Table 1](#) as design parameters.

Table 1. Design Parameters

| DESIGN PARAMETER | EXAMPLE VALUE |
|----------------------|---------------|
| Input voltage range | 3.3 V ± 3% |
| Output voltage | 5 V |
| Maximum load current | 100 mA |

9.2.2 Detailed Design Procedure

The following recommendations on components selection focus on the design of an efficient push-pull converter with high current drive capability. Contrary to popular belief, the output voltage of the unregulated converter output drops significantly over a wide range in load current. The characteristic curve in [Figure 1](#) and [Figure 11](#) for example, shows that the difference between V_{OUT} at minimum load and V_{OUT} at maximum load exceeds a transceiver's supply range. Therefore, in order to provide a stable, load independent supply while maintaining maximum possible efficiency the implementation of a low dropout regulator (LDO) is strongly advised.

The final converter circuit is shown in [Figure 47](#). The measured V_{OUT} and efficiency characteristics for the regulated and unregulated outputs are shown in [Figure 2](#) and [Figure 12](#).

9.2.2.1 Drive Capability

The transformer driver is designed for low-power push-pull converters with input and output voltages in the range of 2.25 V to 5.5 V. While converter designs with higher output voltages are possible, care must be taken that higher turns ratios don't lead to primary currents that exceed the specified current limits of the device.

9.2.2.2 LDO Selection

The minimum requirements for a suitable low dropout regulator are:

- Its current drive capability should slightly exceed the specified load current of the application to prevent the LDO from dropping out of regulation. Therefore, for a load current of 600 mA, choose a 600 mA to 750 mA LDO. While regulators with higher drive capabilities are acceptable, they also usually possess higher dropout voltages that will reduce overall converter efficiency.
- The internal dropout voltage, V_{DO} , at the specified load current should be as low as possible to maintain efficiency. For a low-cost 750 mA LDO, a V_{DO} of 600 mV at 750 mA is common. Be aware; however, that this lower value is usually specified at room temperature and can increase by a factor of 2 over temperature, which in turn will raise the required minimum input voltage.
- The required minimum input voltage preventing the regulator from dropping out of line regulation is given with:

$$V_{I-min} = V_{DO-max} + V_{O-max} \quad (1)$$

This means in order to determine V_I for worst-case condition, the user must take the maximum values for V_{DO} and V_O specified in the LDO data sheet for rated output current (that is, 600 mA) and add them together. Also specify that the output voltage of the push-pull rectifier at the specified load current is equal or higher than V_{I-min} . If it is not, the LDO will lose line-regulation and any variations at the input passes straight through to the output. Hence, below V_{I-min} the output voltage follows the input and the regulator behaves like a simple conductor.

- The maximum regulator input voltage must be higher than the rectifier output under no-load. Under this condition there is no secondary current reflected back to the primary, thus making the voltage drop across R_{DS-on} negligible and allowing the entire converter input voltage to drop across the primary. At this point, the secondary reaches its maximum voltage of

$$V_{S-max} = V_{IN-max} \times n \quad (2)$$

with V_{IN-max} as the maximum converter input voltage and n as the transformer turns ratio. Thus to prevent the LDO from damage the maximum regulator input voltage must be higher than V_{S-max} . Table 2 lists the maximum secondary voltages for various turns ratios commonly applied in push-pull converters.

Table 2. Required Maximum LDO Input Voltages for Various Push-Pull Configurations

| PUSH-PULL CONVERTER | | | | LDO |
|-------------------------------|------------------|------------|-----------------|-----------------|
| CONFIGURATION | V_{IN-max} [V] | URNS-RATIO | V_{S-max} [V] | V_{I-max} [V] |
| 3.3 V_{IN} to 3.3 V_{OUT} | 3.6 | 1.5 ± 3% | 5.6 | 6 to 10 |
| 3.3 V_{IN} to 5 V_{OUT} | 3.6 | 2.2 ± 3% | 8.2 | 10 |
| 5 V_{IN} to 5 V_{OUT} | 5.5 | 1.5 ± 3% | 8.5 | 10 |

9.2.2.3 Diode Selection

A rectifier diode should always possess low-forward voltage to provide as much voltage to the converter output as possible. When used in high-frequency switching applications, such as the SN6505 however, the diode must also possess a short recovery time. Schottky diodes meet both requirements and are therefore strongly recommended in push-pull converter designs. A good choice for low-volt applications and ambient temperatures of up to 85°C is the low-cost Schottky rectifier MBR0520L with a typical forward voltage of 275 mV at 100-mA forward current. For higher output voltages such as ±10 V and above use the MBR0530 which provides a higher DC blocking voltage of 30 V.

Lab measurements have shown that at temperatures higher than 100°C the leakage currents of the above Schottky diodes increase significantly. This can cause thermal runaway leading to the collapse of the rectifier output voltage. Therefore, for ambient temperatures higher than 85°C use low-leakage Schottky diodes, such as RB168MM-40.

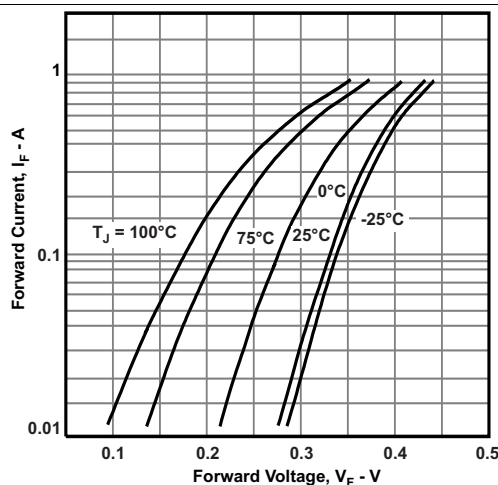


Figure 43. Diode Forward Characteristics for MBR0520L

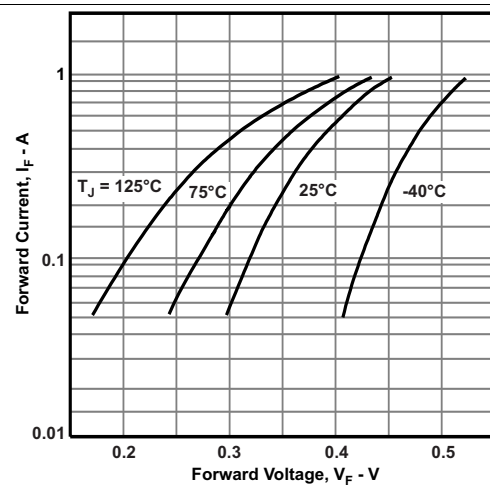


Figure 44. Diode Forward Characteristics MBR0530

9.2.2.4 Capacitor Selection

The capacitors in the converter circuit in [Figure 47](#) are multi-layer ceramic chip (MLCC) capacitors.

As with all high speed CMOS ICs, the device requires a bypass capacitor in the range of 10 nF to 100 nF.

The input bulk capacitor at the center-tap of the primary supports large currents into the primary during the fast switching transients. For minimum ripple make this capacitor 1 μ F to 10 μ F. In a 2-layer PCB design with a dedicated ground plane, place this capacitor close to the primary center-tap to minimize trace inductance. In a 4-layer board design with low-inductance reference planes for ground and V_{IN} , the capacitor can be placed at the supply entrance of the board. To ensure low-inductance paths use two vias in parallel for each connection to a reference plane or to the primary center-tap.

The bulk capacitor at the rectifier output smooths the output voltage. Make this capacitor 1 μ F to 10 μ F.

The small capacitor at the regulator input is not necessarily required. However, good analog design practice suggests, using a small value of 47 nF to 100 nF improves the regulator's transient response and noise rejection.

The LDO output capacitor buffers the regulated output for the subsequent isolator and transceiver circuitry. The choice of output capacitor depends on the LDO stability requirements specified in the data sheet. However, in most cases, a low-ESR ceramic capacitor in the range of 4.7 μ F to 10 μ F will satisfy these requirements.

9.2.2.5 Transformer Selection

9.2.2.5.1 V-t Product Calculation

To prevent a transformer from saturation its V-t product must be greater than the maximum V-t product applied by the device. The maximum voltage delivered by the device is the nominal converter input plus 10%. The maximum time this voltage is applied to the primary is half the period of the lowest frequency at the specified input voltage. Therefore, the transformer's minimum V-t product is determined through:

$$V_{t_{min}} \geq V_{IN-max} \times \frac{T_{max}}{2} = \frac{V_{IN-max}}{2 \times f_{min}} \quad (3)$$

Taking an example of f_{min} as 138 kHz for [SN6505A](#) and 363 kHz for [SN6505B](#) with a 5 V supply, [Equation 3](#) yields the minimum V-t products of:

$$V_{t_{min}} \geq \frac{5.5 V}{2 \times 138 \text{ kHz}} = 20 V\mu s \quad \text{for SN6505A, and}$$

$$V_{t_{min}} \geq \frac{5.5 V}{2 \times 363 \text{ kHz}} = 7.6 V\mu s \quad \text{for SN6505B applications.} \quad (4)$$

Common V-t values for low-power center-tapped transformers range from 22 $V\mu s$ to 150 $V\mu s$ with typical footprints of 10 mm x 12 mm. However, transformers specifically designed for PCMCIA applications provide as little as 11 $V\mu s$ and come with a significantly reduced footprint of 6 mm x 6 mm only.

While Vt-wise all of these transformers can be driven by the device, other important factors such as isolation voltage, transformer wattage, and turns ratio must be considered before making the final decision.

9.2.2.5.2 Turns Ratio Estimate

Assume the rectifier diodes and linear regulator has been selected. Also, it has been determined that the transformer chosen must have a V-t product of at least 11 $V\mu s$. However, before searching the manufacturer web sites for a suitable transformer, the user still needs to know its minimum turns ratio that allows the push-pull converter to operate flawlessly over the specified current and temperature range. This minimum transformation ratio is expressed through the ratio of minimum secondary to minimum primary voltage multiplied by a correction factor that takes the transformer's typical efficiency of 97% into account:

$$V_{P-min} = V_{IN-min} - V_{DS-max} \quad (5)$$

V_{S-min} must be large enough to allow for a maximum voltage drop, V_{F-max} , across the rectifier diode and still provide sufficient input voltage for the regulator to remain in regulation. From the [LDO Selection](#) section, this minimum input voltage is known and by adding V_{F-max} gives the minimum secondary voltage with:

$$V_{S-min} = V_{F-max} + V_{DO-max} + V_{O-max} \quad (6)$$

9.2.2.5.3 Recommended Transformers

Depending on the application, use the minimum configuration in [Figure 46](#) or standard configuration in [Figure 47](#).

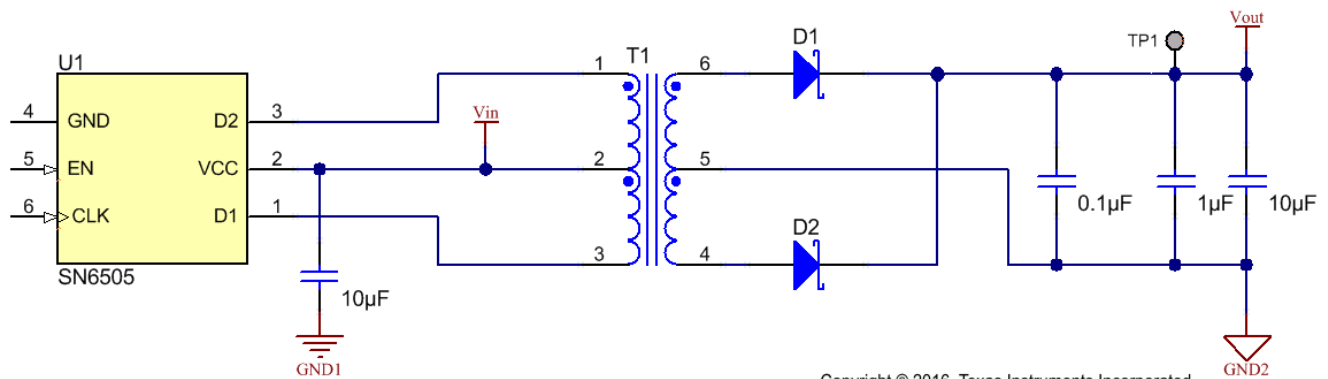


Figure 46. Unregulated Output for Low-Current Loads With Wide Supply Range

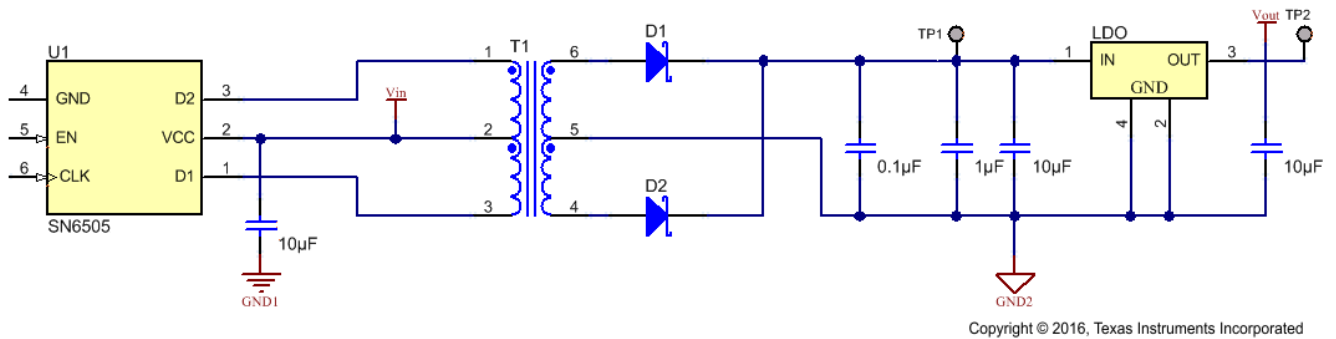


Figure 47. Regulated Output for Stable Supplies and High Current Loads

The Wurth Electronics Midcom isolation transformers in [Table 3](#) are optimized designs for the device, providing high efficiency and small form factor at low-cost.

The 1:1.1 and 1:1.7 turns-ratios are designed for logic applications with wide supply rails and low load currents. These applications operate without LDO, thus achieving further cost-reduction.

Table 3. Recommended Isolation Transformers Optimized for the Device

| Turns Ratio | V × T (Vμs) | Isolation (V _{RMS}) | Dimensions (mm) | Application | LDO ⁽¹⁾ | Order No. | Manufacturer |
|-------------|--|--|---------------------|---|--|-----------|-------------------------------|
| 1:1.1 ±2% | 7 | 2500 | 6.73 x 10.05 x 4.19 | 3.3 V → 3.3 V, 100mA, SN6505B Refer to Figure 13 and Figure 14 | No | 760390011 | Würth Electronics / Midcom |
| 1:1.1 ±2% | 11 | | | 5 V → 5 V, 100mA, SN6505B Refer to Figure 15 and Figure 16 | | 760390012 | |
| 1:1.7 ±2% | | | | 3.3 V → 5 V, 100mA, SN6505B Refer to Figure 17 and Figure 18 | | 760390013 | |
| 1:1.3 ±2% | | | | 3.3 V → 3.3 V, 100mA, SN6505B Refer to Figure 19 and Figure 20 | Yes | 760390014 | |
| 1:1.3 ±2% | | | | 5 V → 5 V, 100mA, SN6505B Refer to Figure 21 and Figure 22 | | 760390014 | |
| 1:2.1 ±2% | | | | 3.3 V → 5 V, 100mA, SN6505B Refer to Figure 23 and Figure 24 | | 760390015 | |
| 1:23:1 ±2% | | | | 5 V → 3.3 V, 100mA, SN6505B | | 750313710 | |
| 1:1.7 ±2% | | | 8.3 x 12.6 x 4.1 | 3.3 V → 3.3 V, 1A, SN6505B Refer to Figure 25 and Figure 26 | | 750316028 | |
| 1:2.1 ±2% | 3.3 V → 5 V, 1A, SN6505B Refer to Figure 27 and Figure 28 | | | No | 750316029 | | |
| 1:3:1 ±2% | 5 V → 3.3 V, 1A, SN6505B Refer to Figure 29 and Figure 30 | | | | 750316030 | | |
| 1:1.1 ±2% | 8.6 | | | | 3.3 V → 3.3 V, 1A , SN6505B 5 V → 5 V, 1A , SN6505B Refer to Figure 11 and Figure 12 | 750315371 | |
| 1:1.1 ±2% | 11 | | 5000 | 9.14 x 12.7 x 7.37 | 3.3 V → 3.3 V, 100mA, SN6505B | Yes | |
| 1:1.1 ±2% | | 5 V → 5 V, 100mA, SN6505B | | | 750313734 | | |
| 1:1.7 ±2% | | 3.3 V → 5 V, 100mA, SN6505B | | | 750313769 | | |
| 1:1.3 ±2% | | 3.3 V → 3.3 V, 100mA, SN6505B 5 V → 5 V, 100mA, SN6505B | | | Yes | 750313638 | |
| 1:2.1 ±2% | | 3.3 V → 5 V, 100mA, SN6505B | | | | 750313626 | |
| 1:3:1 ±2% | | 5 V → 3.3 V, 100mA , SN6505B | | | No | 750313638 | |
| 1:1.75 ±2% | | 41 | | 12.32 x 15.41 x 11.05 | 3.3 V → 3.3 V, 1A, SN6505A Refer to Figure 3 and Figure 4 | Yes | |
| 1:2 ±2% | 3.3 V → 5 V, 1A, SN6505A Refer to Figure 5 and Figure 6 | | | | No | 750316032 | |
| 1:3:1 ±2% | 5.0 V → 3.3 V, 1A, SN6505A Refer to Figure 7 and Figure 8 | | | | | 750316033 | |
| 1:1.1 ±2% | 23 | 14.88 x 12.32 x 11.05 | | 3.3 V → 3.3 V, 1A, SN6505A 5 V → 5 V, 1A , SN6505A Refer to Figure 1 and Figure 2 | | 750315240 | |

(1) For configurations with LDO, a higher voltage than the required output voltage is generated, to allow for LDO drop-out. Figures show the voltage and efficiency at the LDO input.

9.2.3 Application Curves

See the [Typical Characteristics, SN6505A](#) and [Typical Characteristics, SN6505B](#) for application curves with transformers optimized for the device, providing high efficiency and small form factor at low-cost.

9.2.4 System Examples

9.2.4.1 Higher Output Voltage Designs

The device can drive push-pull converters that provide high output voltages of up to 30 V, or bipolar outputs of up to ± 15 V. Using commercially available center-tapped transformers, with their rather low turns ratios of 0.8 to 5, requires different rectifier topologies to achieve high output voltages. Figure 48 to Figure 50 show some of these topologies together with their respective open-circuit output voltages.

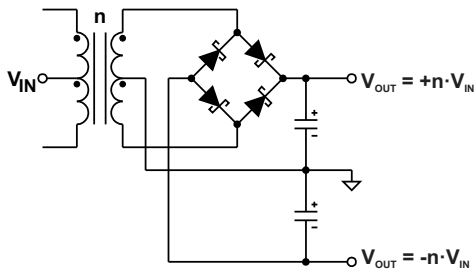


Figure 48. Bridge Rectifier With Center-Tapped Secondary Enables Bipolar Outputs

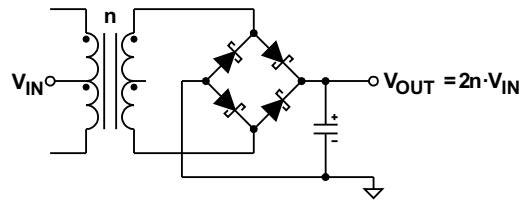


Figure 49. Bridge Rectifier Without Center-Tapped Secondary Performs Voltage Doubling

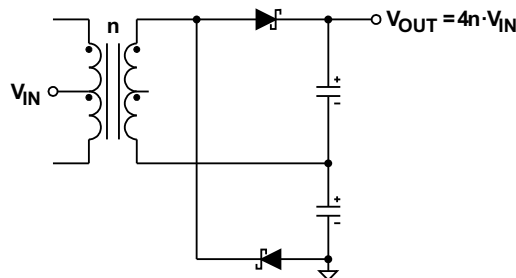


Figure 50. Half-Wave Rectifier Without Centered Ground and Center-Tapped Secondary Performs Voltage Doubling Twice, Hence Quadrupling V_{IN}

9.2.4.2 Application Circuits

The following application circuits are shown for a 3.3 V input supply commonly taken from the local, regulated microcontroller supply. For 5 V input voltages requiring different turn ratios refer to the transformer manufacturers and their web sites listed in Table 4.

Table 4. Transformer Manufacturers

| MANUFACTURER | MORE INFORMATION |
|------------------------------|---|
| Coilcraft Inc. | http://www.coilcraft.com |
| Halo-Electronics Inc. | http://www.haloelectronics.com |
| Murata Power Solutions | http://www.murata-ps.com |
| Würth Electronics Midcom Inc | http://www.midcom-inc.com |



10 Power Supply Recommendations

The device is designed to operate from an input voltage supply range between 2.5 V and 5 V nominal. This input supply must be regulated within $\pm 10\%$. If the input supply is located more than a few inches from the device, a 0.1 μF by-pass capacitor should be connected as close as possible to the device V_{CC} pin and a 10 μF capacitor should be connected close to the transformer center-tap pin.

11 Layout

11.1 Layout Guidelines

- The V_{IN} pin must be buffered to ground with a low-ESR ceramic bypass-capacitor. The recommended capacitor value can range from 1 μF to 10 μF . The capacitor must have a voltage rating of 10 V minimum and a X5R or X7R dielectric.
- The optimum placement is closest to the V_{IN} and GND pins at the board entrance to minimize the loop area formed by the bypass-capacitor connection, the V_{IN} terminal, and the GND pin. See [Figure 52](#) for a PCB layout example.
- The connections between the device D1 and D2 pins and the transformer primary endings, and the connection of the device V_{CC} pin and the transformer center-tap must be as close as possible for minimum trace inductance.
- The connection of the device V_{CC} pin and the transformer center-tap must be buffered to ground with a low-ESR ceramic bypass-capacitor. The recommended capacitor value can range from 1 μF to 10 μF . The capacitor must have a voltage rating of 16 V minimum and a X5R or X7R dielectric.
- The device GND pins must be tied to the PCB ground plane using two vias for minimum inductance.
- The ground connections of the capacitors and the ground plane should use two vias for minimum inductance.
- The rectifier diodes should be Schottky diodes with low forward voltage in the 10 mA to 100 mA current range to maximize efficiency.
- The V_{OUT} pin must be buffered to ISO-Ground with a low-ESR ceramic bypass-capacitor. The recommended capacitor value can range from 1 μF to 10 μF . The capacitor must have a voltage rating of 16 V minimum and a X5R or X7R dielectric.

11.2 Layout Example

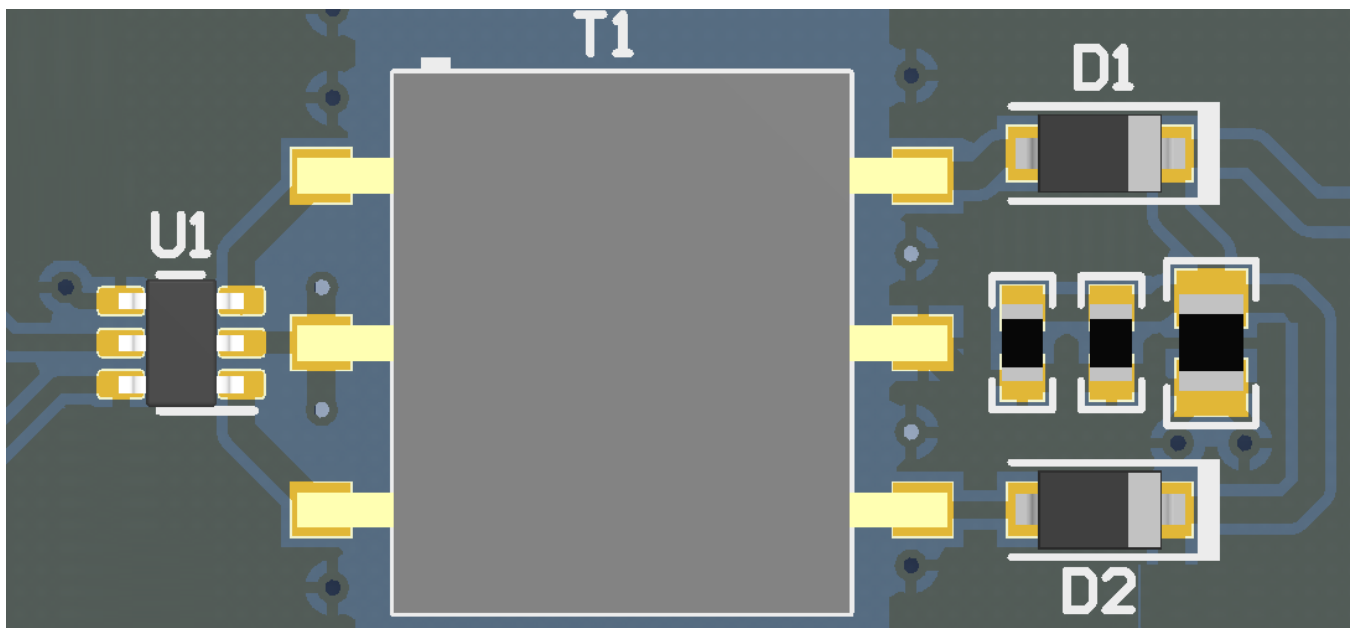


Figure 52. Layout Example of a 2-Layer Board

12 器件和文档支持

12.1 器件支持

12.1.1 第三方产品免责声明

TI 发布的与第三方产品或服务有关的信息，不能构成与此类产品或服务或保修的适用性有关的认可，不能构成此类产品或服务单独或与任何 TI 产品或服务一起的表示或认可。

12.2 文档支持

12.2.1 相关文档

请参阅如下相关文档：

- 德州仪器 (TI)，[《数字隔离器设计指南》](#)
- 德州仪器 (TI)，[《隔离相关术语》](#)
- 德州仪器 (TI)，[如何在隔离式 CAN 系统中隔离信号和电源 TI 技术手册](#)
- 德州仪器 (TI)，[《适用于三相逆变器的小型增强型隔离式 IGBT 栅极驱动参考设计》TI 设计](#)

12.3 相关链接

下表列出了快速访问链接。类别包括技术文档、支持和社区资源、工具和软件，以及立即订购快速访问。

表 5. 相关链接

| 器件 | 产品文件夹 | 立即订购 | 技术文档 | 工具与软件 | 支持和社区 |
|---------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| SN6505A | 请单击此处 | 请单击此处 | 请单击此处 | 请单击此处 | 请单击此处 |
| SN6505B | 请单击此处 | 请单击此处 | 请单击此处 | 请单击此处 | 请单击此处 |

12.4 接收文档更新通知

要接收文档更新通知，请导航至 [TI.com.cn](#) 上的器件产品文件夹。单击右上角的通知我进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

12.5 社区资源

下列链接提供到 TI 社区资源的连接。链接的内容由各个分销商“按照原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [《使用条款》](#)。

TI E2E™ 在线社区 TI 的工程师对工程师 (E2E) 社区。此社区的创建目的在于促进工程师之间的协作。在 [e2e.ti.com](#) 中，您可以咨询问题、分享知识、拓展思路并与同行工程师一道帮助解决问题。

设计支持 TI 参考设计支持 可帮助您快速查找有帮助的 E2E 论坛、设计支持工具以及技术支持的联系信息。

12.6 商标

E2E is a trademark of Texas Instruments.

12.7 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

12.8 术语表

SLYZ022 — TI 术语表。

这份术语表列出并解释术语、缩写和定义。

13 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知，且不会对此文档进行修订。如需获取此数据表的浏览器版本，请查阅左侧的导航栏。

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2019 德州仪器半导体技术（上海）有限公司

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| SN6505ADBVR | ACTIVE | SOT-23 | DBV | 6 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -55 to 125 | 650A | Samples |
| SN6505ADBV | ACTIVE | SOT-23 | DBV | 6 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -55 to 125 | 650A | Samples |
| SN6505BDBVR | ACTIVE | SOT-23 | DBV | 6 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -55 to 125 | 650B | Samples |
| SN6505BDBV | ACTIVE | SOT-23 | DBV | 6 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-1-260C-UNLIM | -55 to 125 | 650B | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN6505ADBVR | SOT-23 | DBV | 6 | 3000 | 178.0 | 9.0 | 3.23 | 3.17 | 1.37 | 4.0 | 8.0 | Q3 |
| SN6505ADBVT | SOT-23 | DBV | 6 | 250 | 178.0 | 9.0 | 3.23 | 3.17 | 1.37 | 4.0 | 8.0 | Q3 |
| SN6505BDBVR | SOT-23 | DBV | 6 | 3000 | 178.0 | 9.0 | 3.23 | 3.17 | 1.37 | 4.0 | 8.0 | Q3 |
| SN6505BDBVT | SOT-23 | DBV | 6 | 250 | 178.0 | 9.0 | 3.23 | 3.17 | 1.37 | 4.0 | 8.0 | Q3 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN6505ADBVR | SOT-23 | DBV | 6 | 3000 | 180.0 | 180.0 | 18.0 |
| SN6505ADBVT | SOT-23 | DBV | 6 | 250 | 180.0 | 180.0 | 18.0 |
| SN6505BDBVR | SOT-23 | DBV | 6 | 3000 | 180.0 | 180.0 | 18.0 |
| SN6505BDBVT | SOT-23 | DBV | 6 | 250 | 180.0 | 180.0 | 18.0 |


DBV0006A



PACKAGE OUTLINE

SOT-23 - 1.45 mm max height

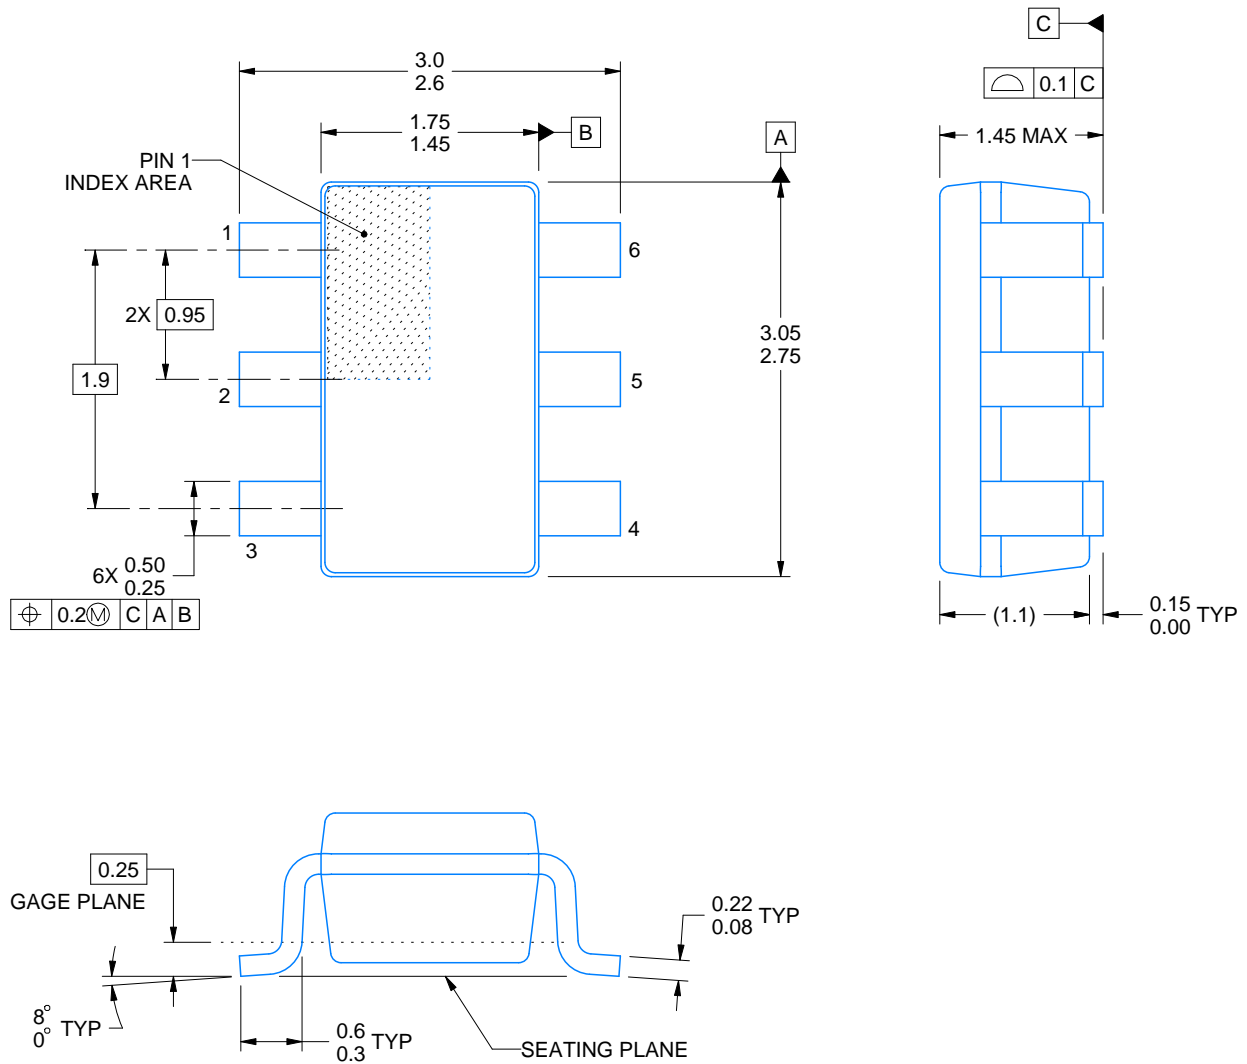SMALL OUTLINE TRANSISTOR



4214840/B 03/2018

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
4. Leads 1,2,3 may be wider than leads 4,5,6 for package orientation.
5. Reference JEDEC MO-178.

EXAMPLE BOARD LAYOUT


DBV0006A

SOT-23 - 1.45 mm max height

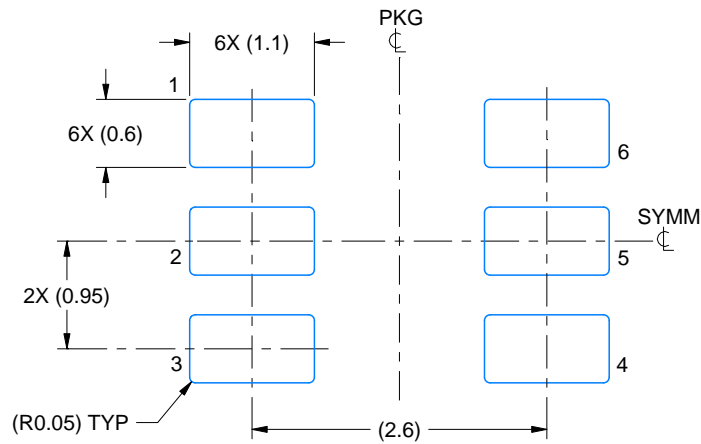SMALL OUTLINE TRANSISTOR



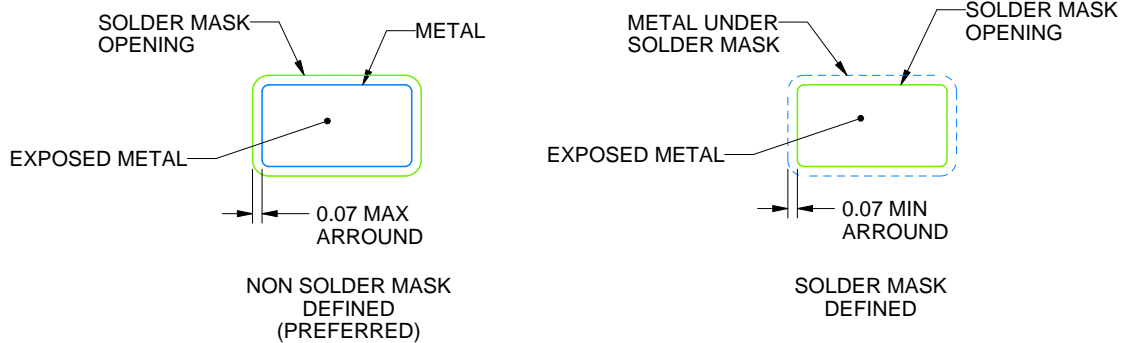LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X



SOLDER MASK DETAILS

4214840/B 03/2018

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DBV0006A

SOT-23 - 1.45 mm max height

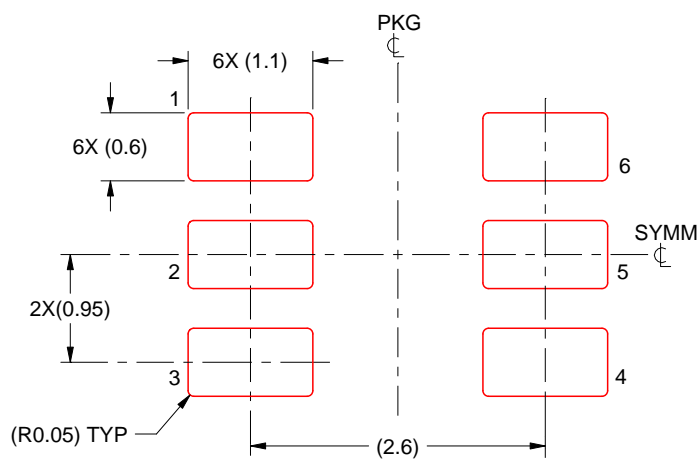SMALL OUTLINE TRANSISTOR



SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214840/B 03/2018

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2019 德州仪器半导体技术（上海）有限公司