

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

## NOTES:

## 1.Specifications

1-1.INSERT FORCE:35N MAX.

1-2.WITHDRAW FORCE:10N MIN.INITIAL

8-20N AFTER

1-3.Current rating:1.0A

1-4.Voltage Rating:30V

1-5.Life Test:10000 CYCLES MIN.


1-6.:Dielectric withstanding:voltage100V AC MIN.


1-7.Contact resistance:30mΩ

MAX.INITIAL;40mΩ MAX AFTER

1-8.Insulation resistance:100MΩ MIN

1-9.Temperature range:-30°TO +80°

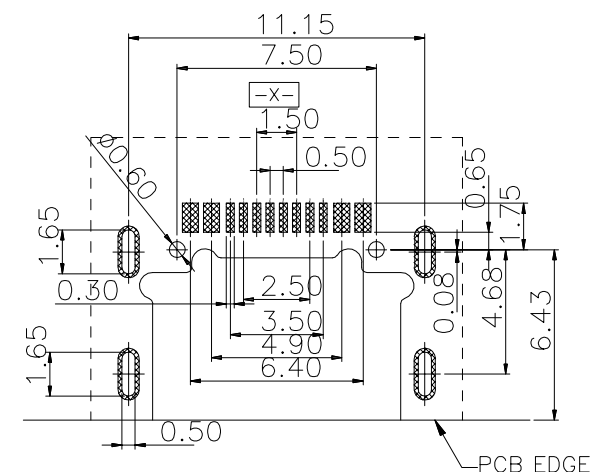

APPROVALS			DATE		<div>HRO韓豪®</div> ELECTRONICS CO.,LTD		
DRAWN	D.J.LV		2017/12/26				
CHECKED					TITLE:	TYPE C16pin沉板1.1MM	
APPROVALS					PART NO.	TYPE-C-31-M-14	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.20					
	5~10	±0.15					
	~ 5	±0.10					
		±2'	DRAWING NO.		SHEET 1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			