








# ROHS





NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLE8

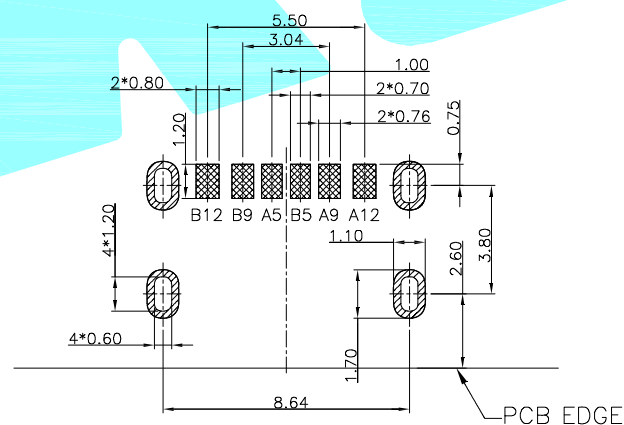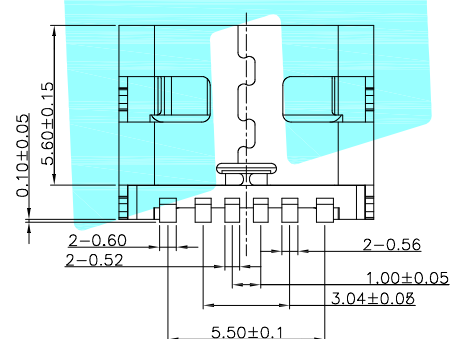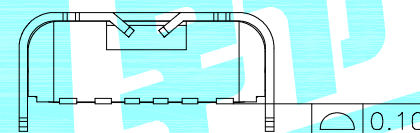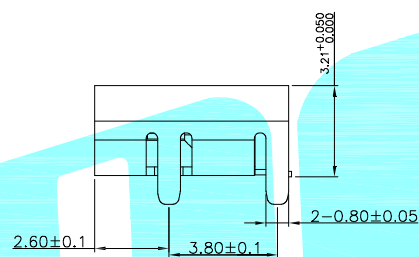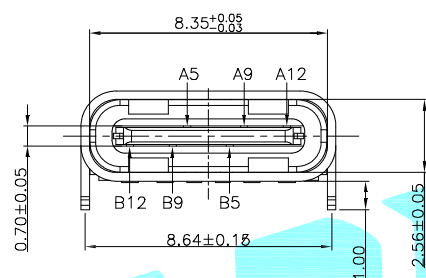

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

③	Shell	——	1	STAINLESS STEEL	Ni Plated	——
②	Contact	——	6	COPPER ALLOY	Au Plated	——
①	Housing	——	1	LCP	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	 ELECTRONICS CO.,LTD		
DRAWN	JKUN.LU	2015.5.13				
CHECKED				TITLE:	DETECTOR SWITCHS	
APPROVALS				PART NO.	TYPE-C-31-M-17	
TOLERANCES ARE	30~以上	±0.30	ANGLE  ±2'	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.20		DRAWING NO.	——	SHEET 1 OF
	5~10	±0.15				
	~ 5	±0.10				