


SX904 SmartNIC

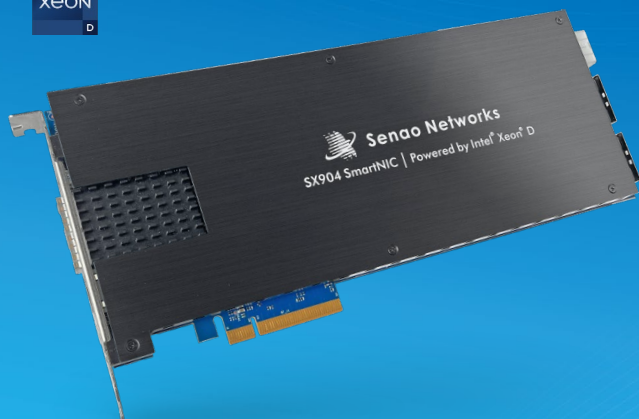

SX904 is based on Intel® Xeon D® processor to offload x86 applications with zero changes. SX904 enables these applications without additional infrastructure footprint.

- SD-WAN/SD-LAN
- Next-Gen Firewall (NGFW)
- Unified Threat Management (UTM)
- Zero-Trust Network Access (ZTNA)

SX904 supports the latest Intel® Platform Firmware Resilience (Intel® PFR), BMC and TPM2.0.

Key Features

- Intel® Xeon® D-1700 Series processor
- Intel® Ethernet Controller E810 for 50GbE PCIe connection to Host CPU
- Dual 25G SFP28
- Dual DDR4 memory channels
- TPM2.0 support for Secure Boot
- OpenBMC, Intel® Platform Firmware Resilience (Intel® PFR)
- Single Slot Passive Cooling
- MCIO Connectors for function expansion

I/O Configuration

- 2 x SFP28
- 1 x UART (mini-USB)
- 1 x USB3.0 Type-A
- 1 x RJ45 1GbE

Key Components

- Intel® Xeon® D-1700 Series
- Intel® Ethernet Controller E810
- Aspeed AST2600/ AST1060

Physical

- Form Factor: FH3/4L+ (266mm)
- Dimensions: W266xH98.4xD20.4mm
- Weight: < 2.3kg

Power

Power delivered through an 8-pin PCIe AUX Power connector (+12VDC) or through PCIe Edge Connector

Environmental

- Operating Temperature: 0°C to 50°C
- Storage Temperature: -40°C to 70°C
- Operating Humidity: up to 85% non-condensing

Model	CPU Cores	TDP	Networking	Host Interface	Memory Support	Storage Capacity	BMC FPR
Xeon® D-1713NT	4C	75W	2x10GbE SFP+	PCIe Gen4 x8	Up to 32GB, Dual-channel DDR4-2933 ECC	Up to 128GB eMMC	AST1060 (Intel® PFR)
Xeon® D-1733NT	8C	83W	2x10GbE SFP+				AST2600 (OpenBMC/BIOS)
Xeon® D-1747NTE	10C	110W	2x25GbE SFP28				



I/O Interfaces

