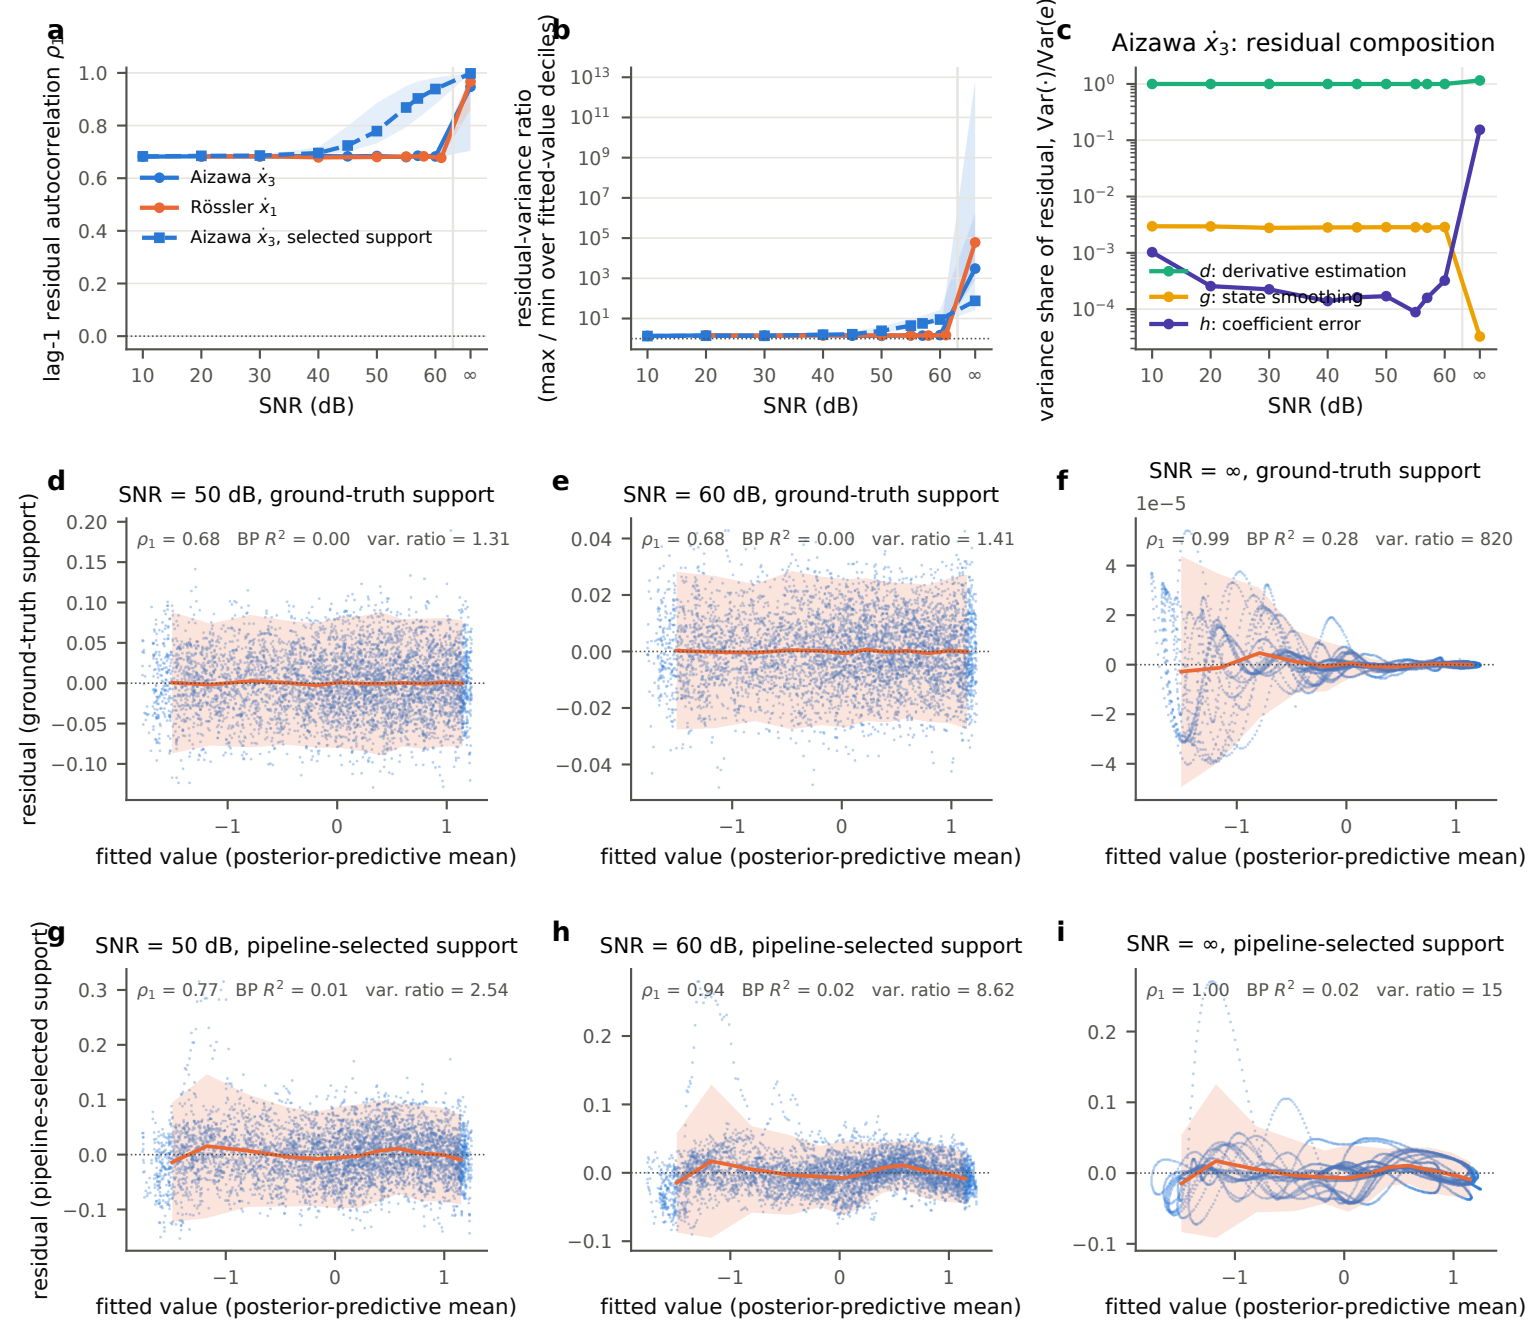

a
lag-1 residual autocorrelation ρ_1
Aizawa $\dot{x}_3$
Rössler $\dot{x}_1$
Aizawa $\dot{x}_3$, selected support
SNR (dB)
b
residual-variance ratio
(max / min over fitted-value deciles)
SNR (dB)
c
Aizawa $\dot{x}_3$: residual composition
variance share of residual, Var(·)/Var(e)
d: derivative estimation
g: state smoothing
h: coefficient error
SNR (dB)
d
SNR = 50 dB, ground-truth support
ρ_1 = 0.68 BP R^2 = 0.00 var. ratio = 1.31
residual (ground-truth support)
fitted value (posterior-predictive mean)
e
SNR = 60 dB, ground-truth support
ρ_1 = 0.68 BP R^2 = 0.00 var. ratio = 1.41
fitted value (posterior-predictive mean)
f
SNR = ∞, ground-truth support
1e−5
ρ_1 = 0.99 BP R^2 = 0.28 var. ratio = 820
fitted value (posterior-predictive mean)
g
SNR = 50 dB, pipeline-selected support
ρ_1 = 0.77 BP R^2 = 0.01 var. ratio = 2.54
residual (pipeline-selected support)
fitted value (posterior-predictive mean)
h
SNR = 60 dB, pipeline-selected support
ρ_1 = 0.94 BP R^2 = 0.02 var. ratio = 8.62
fitted value (posterior-predictive mean)
i
SNR = ∞, pipeline-selected support
ρ_1 = 1.00 BP R^2 = 0.02 var. ratio = 15
fitted value (posterior-predictive mean)