

Hik Device Gateway

Hik Device Gateway is a gateway product that supports third-party platforms in managing Hikvision access control and encoding devices via HTTP and RTSP.

Key Features

Device Management

- Support adding encoding ISUP-enabled devices.
- Support adding access control devices via ISUP5.0 and ISAPI.

General

- Support configuring device time, and rebooting and upgrading devices on Hik Device Gateway.
- Support configuring event server addresses or enabling Alarm Subscription to send events from devices to third-party platforms directly.

**This first way should be supported by the device, and it is recommended that events are sent directly.*

- Support transmitting ISAPI protocols to devices.

**This function should be supported by the device.*

- Support integrating the live view and playback by plugin and WebSDK.

Features for Encoding Devices

- Support performing live view, playback, and two-way audio over RTSP on third-party platforms.
- Support downloading videos, controlling PTZ, capturing pictures, and adding face pictures to the face picture library over HTTP on third-party platforms.
- Support performing live view, playback, and two-way audio on Web without plug-in via streaming SDK.

Features for Access Control Devices

- Support managing permissions including adding, deleting, editing, and searching for persons, faces, cards, and fingerprints. Support configuring permission schedules for persons.
- Support searching for access control events stored on devices on Hik Device Gateway.
- Support configuring door parameters and controlling doors remotely on Hik Device Gateway.
- Support integrating the function of sending live view streams over RTSP


Specifications

Model		Hik Device Gateway					
Devices		Support up to 10,000 devices.					
Access Control Devices	Event Distribution	For ISAPI devices, support up to 100 events without pictures per second. For ISUP devices, support up to 1000 events without pictures per second and 20 events with pictures per second (up to 200 KB). <i>Note: For higher performance, the event transmission is recommended. This method is not restricted by the performance of Hik Device Gateway and instead is dependent on the third-party platform.</i>					
	Stream Distribution	Support up to 500 simultaneous video stream live views, each with a bitrate of 1Mbps.					
Encoding Device	Stream Forwarding	Support up to 500 simultaneous video streams and 100 simultaneous video playback, each with a bitrate of 1 Mbps.					
	Event Distribution	Support up to 100 events without pictures per second and 20 events with pictures (up to 200 KB) per second. <i>Note: For higher performance, the event transmission is recommended. This method is not restricted by the performance of Hik Device Gateway but by that of the third-party platform.</i>					
	Video Downloading	Support downloading up to 100 videos at a time.					
	Two-way Audio	Support up to 100 channels for two-way audio at a time. <i>* For mobile DVR V5.2.1 and mobile NVR V5.2.1, only audio encoding format G.722.1 is supported for the two-way audio.</i>					
	Alarm/Event Type	Support directly distributing the following alarms/events: motion detection alarm, video loss alarm, alarm input alarm, video tempering alarm, video standard mismatched alarm, overspeed alarm, temperature too high alarm, acceleration exception alarm, collision detection alarm, rollover detection alarm, abnormal driving behavior alarm, GPS information uploading event, HDD full, HDD error, device online/offline alarm, people counting alarm, smart events, PIR alarm, traffic flow over-limit alarm, driver assistance alarm, camera low-battery alarm, and passenger flow data upload. <i>Note: Hik Device Gateway transmits other types of alarms/events reported by ISUP-enabled devices in the following ways:</i> <table><tr><td>Format</td><td>Transmit Content</td></tr><tr><td>JSON</td><td>Original Text</td></tr><tr><td>XML</td><td>Text in a Specified Format</td></tr></table>	Format	Transmit Content	JSON	Original Text	XML
Format	Transmit Content						
JSON	Original Text						
XML	Text in a Specified Format						
Integration via ISAPI Protocol		Support up to 200 devices					

System Requirements

Features	Requirements
Minimum Hardware Requirements	
CPU	Intel(R) Core(TM) i3-2100 CPU @ 3.10GHz, 1 core
RAM	4 GB
HDD Capacity	10 GB
Network Card	Million Bits NIC
Recommended Hardware Requirements	
CPU	Intel(R) Core(TM) i5-7500 @ 3.0 GHz, 4 core and more
RAM	8 GB or more
HDD Capacity	50 GB or more
Network Card	Gigabit NIC
Software Requirements	
Operating System	Microsoft^(R) Windows 10 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit), Windows Server 2019 (64-bit) <i>* For Windows Server 2012 R2 (64-bit), the patch KB2999226 is required to be installed.</i> CentOS 7 (64-bit) Ubuntu 20.04 (64-bit) Red Hat Enterprise Linux9 (64-bit)
Web Browser	Internet Explorer 9/10/11, Chrome 31.0 and later versions, Firefox 30 and later versions, Edge

Typical Application

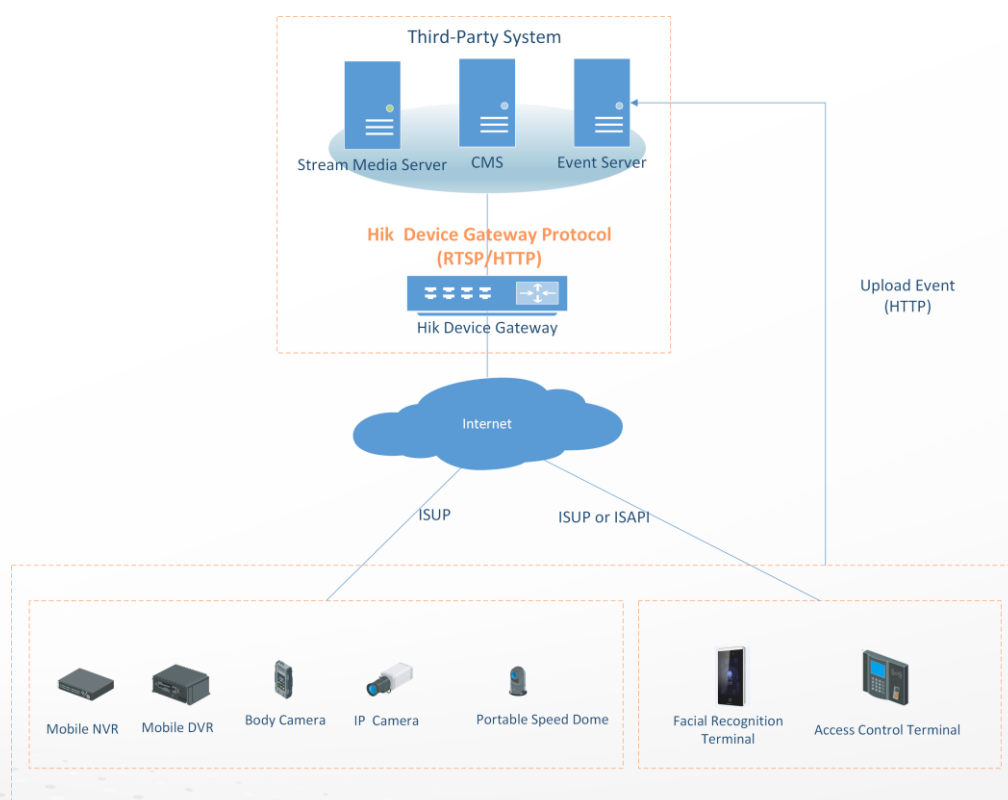

Supported Products and Versions

Product Series	Model	Version
Body Camera	DS-MH2211	V1.2.0
	DS-MCW405	V2.0.1_build 201218
	DS-MH2311	V2.0.1_build 201218
Mobile DVR	DS-MP7508/GW(1T)	V5.1.2
	DS-MP7508/GW	V5.1.3.179582 build191224
	DS-MP5604	V5.3.0.0 build210511
NVR	DS-7608NI-I2	V4.40.015 build 200616
Mobile NVR	DS-MP7608HN	V5.3.0.191832 build201109
Camera	DS-2CD2125FWD-IS	V5.6.5 build 200316
	DS-2XS6D22E-LGL	V5.5.120 build 210511
Portable Speed Dome	DS-MH6171I	V5.2.5
Dome Camera	DS-2DF7225IX-AEL	V5.5.40 build 210513
4G Solar Camera	DS-2XS6A25G0-I/CH20S40	V5.5.111 build 210513
ISUP5.0 Facial Recognition Terminal	DS-K1T642MFW	V3.2.0 build 210203
	DS-K1T671TMFW	V3.2.0 build 210107
	DS-K5604A-ZV	V3.2.0 build 210203
	DS-K5671-3XF/ZU	V3.2.2 build 210323
ISUP5.0 Access Control Terminal	DS-K1T8003EF	V1.2.3 build 191120
	DS-K1A8503EF-B	
	DS-K1T804EF	

See Far, Go Further



www.hikvision.com
support@hikvision.com

