

Darknet-19: reusable tile configurations


16 chiplets | 1 core per chiplet | every installed channel = 8 B/cycle

T0: corner


T1: edge

T2: interior


Original: 8 channels — total 6,144 B/cycle



256 B/cycle per tile | 4 instances

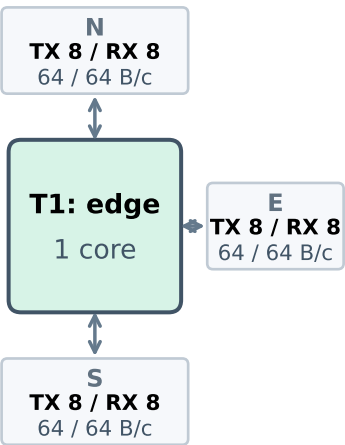


384 B/cycle per tile | 8 instances

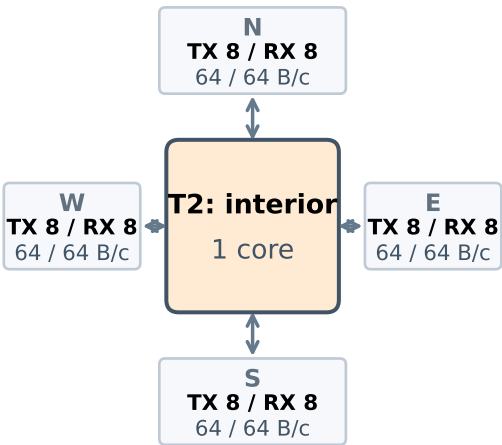


512 B/cycle per tile | 4 instances


Retuned B2: 7 channels — total 5,376 B/cycle



224 B/cycle per tile | 4 instances

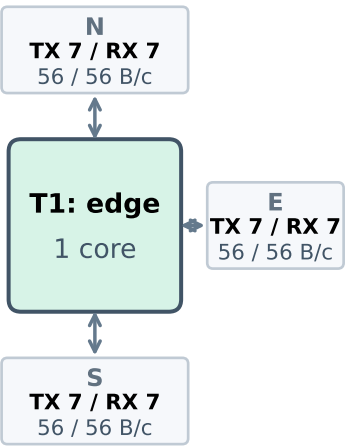


336 B/cycle per tile | 8 instances

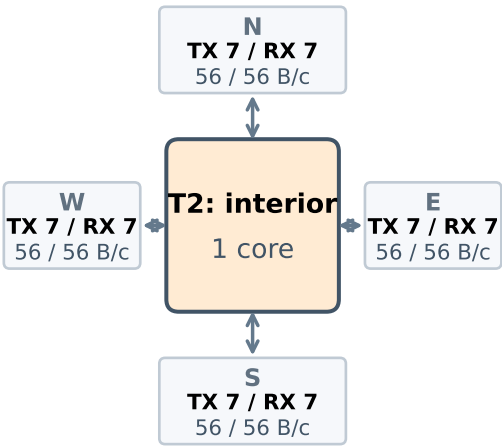


448 B/cycle per tile | 4 instances


Variable: 4 / 5 / 7 channels — total 4,224 B/cycle



176 B/cycle per tile | 4 instances

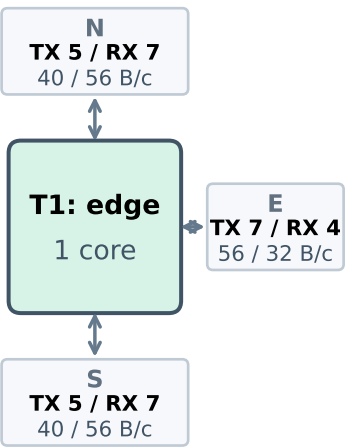

280 B/cycle per tile | 8 instances

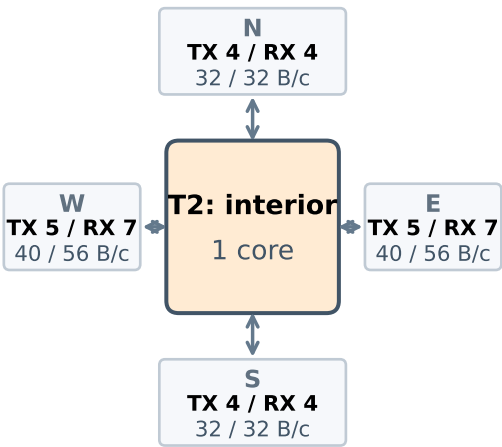

320 B/cycle per tile | 4 instances

TX = outgoing channels, RX = incoming channels. Port capacity labels are TX / RX.

Canonical templates before rotation/reflection; all instances of the same tile type share this configuration.