





Shou Sugi Ban

北京漫和





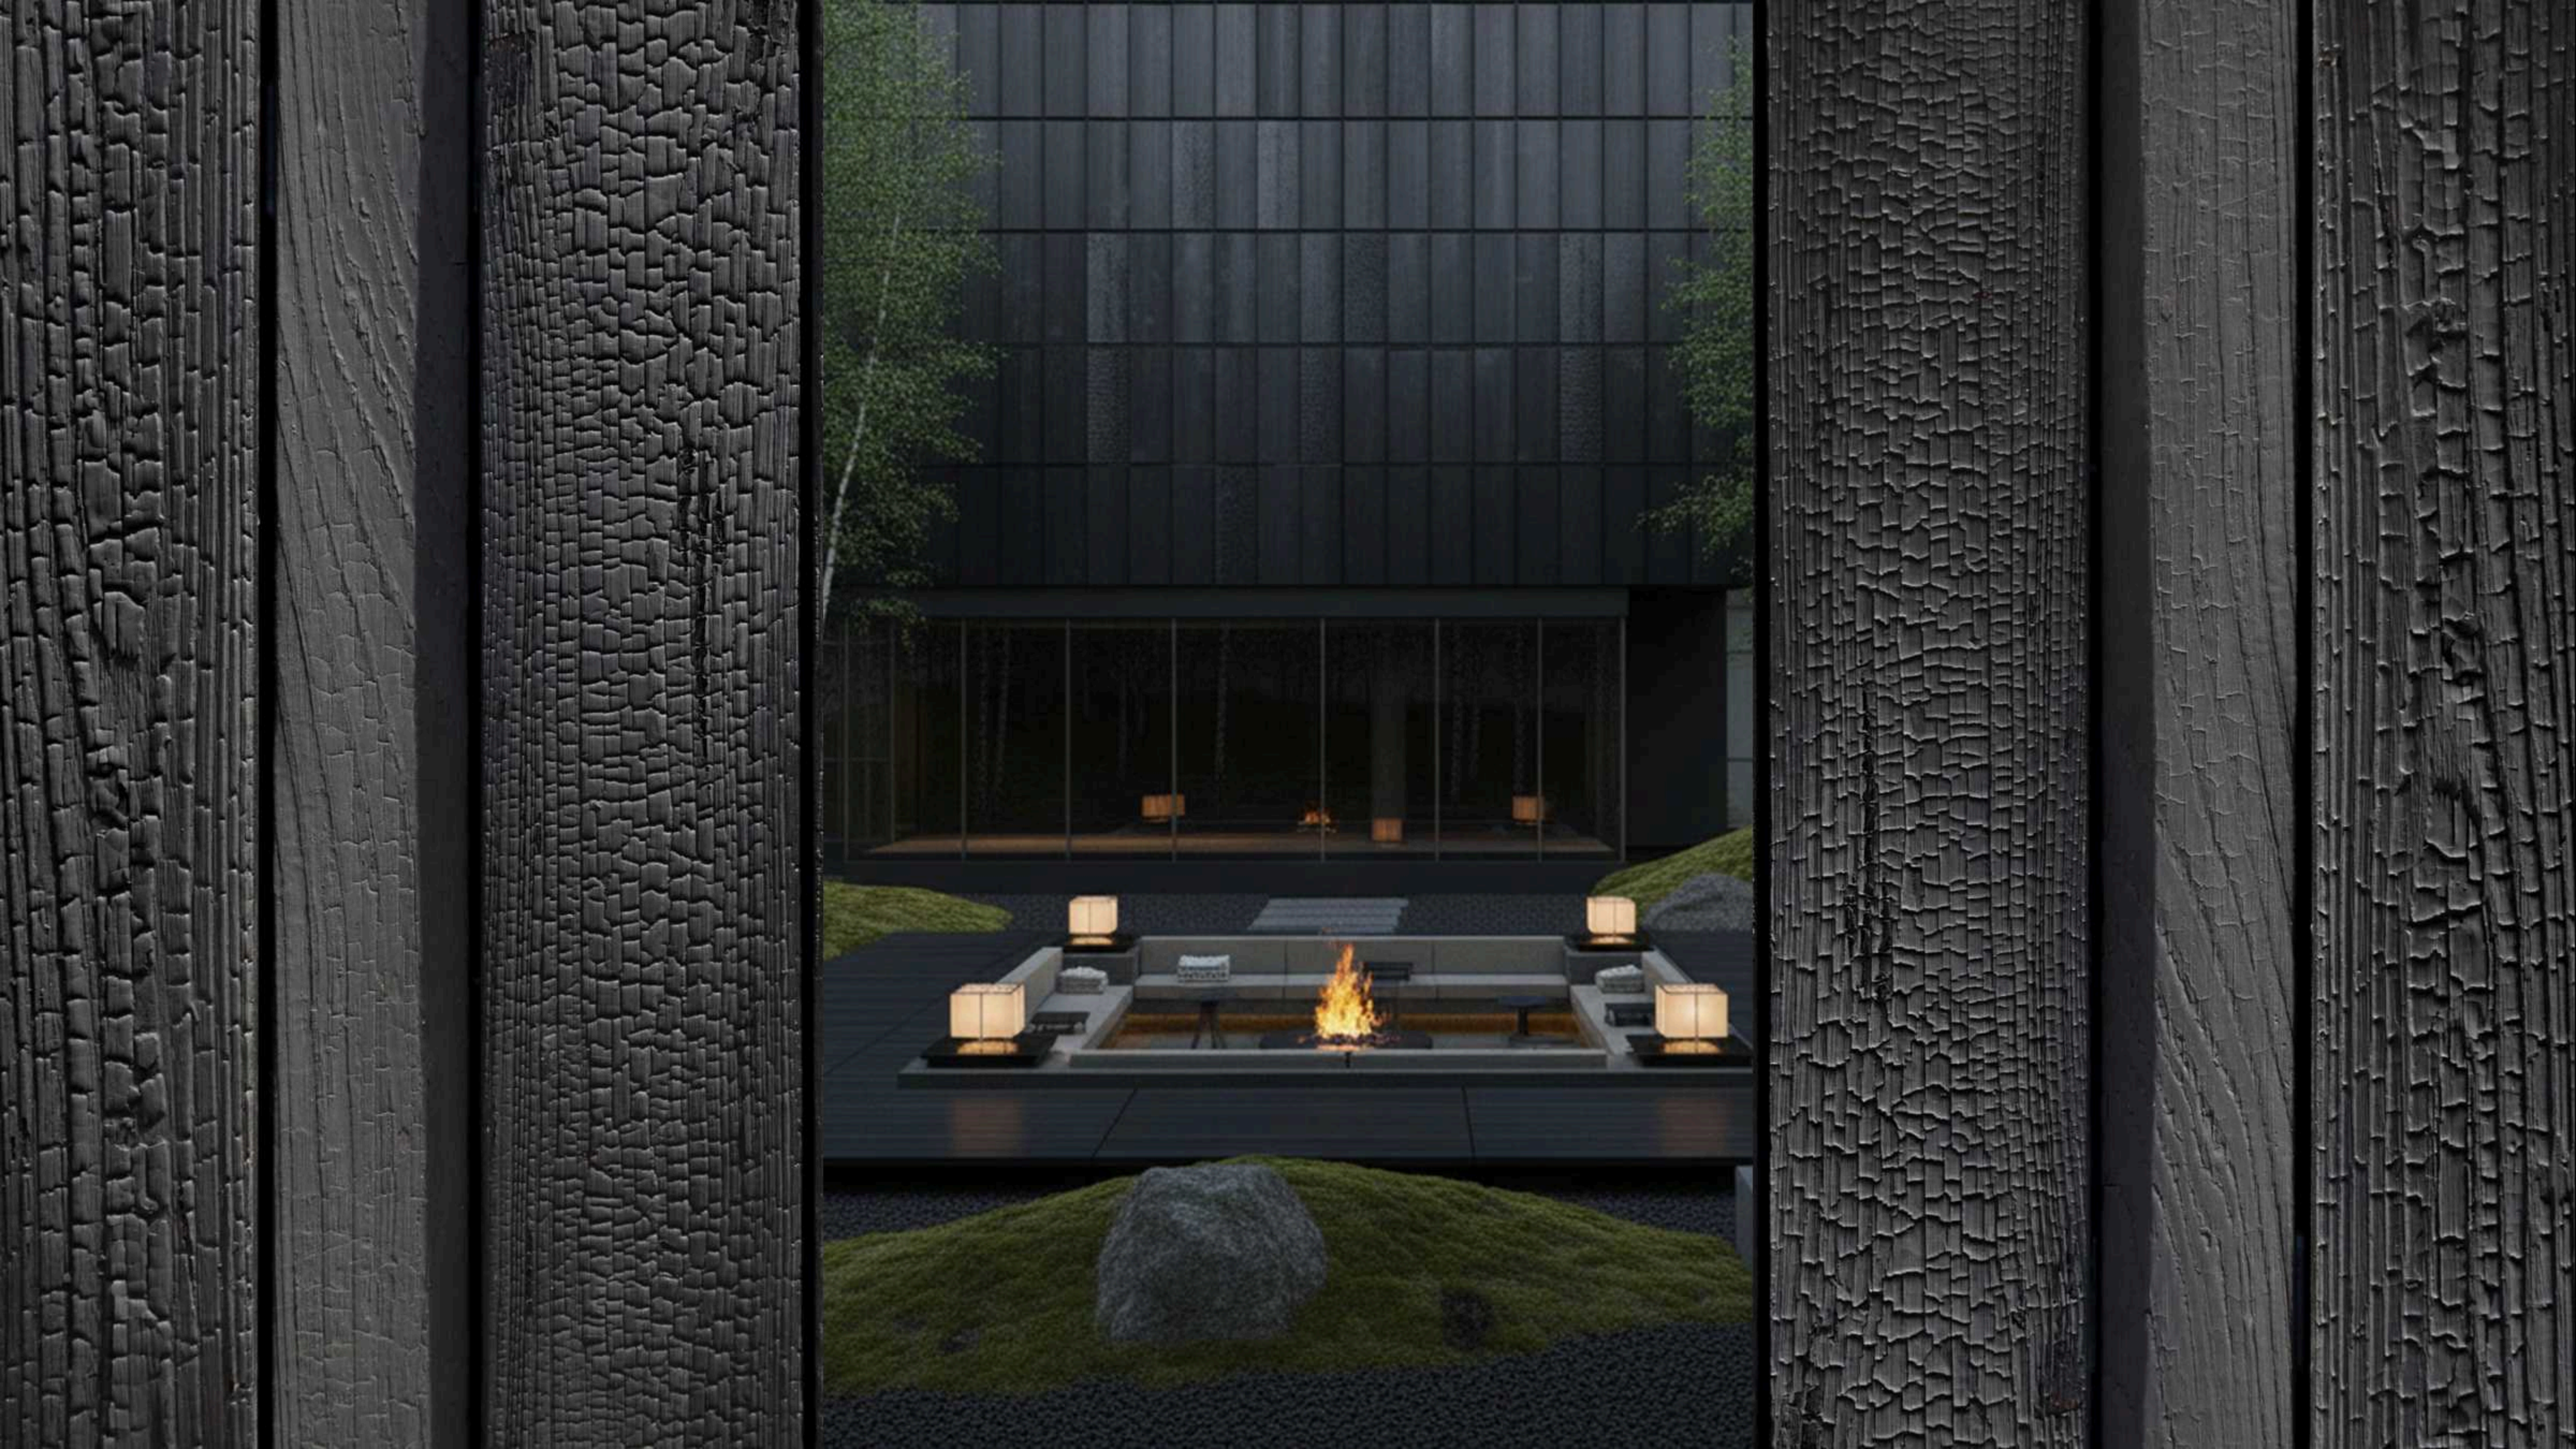

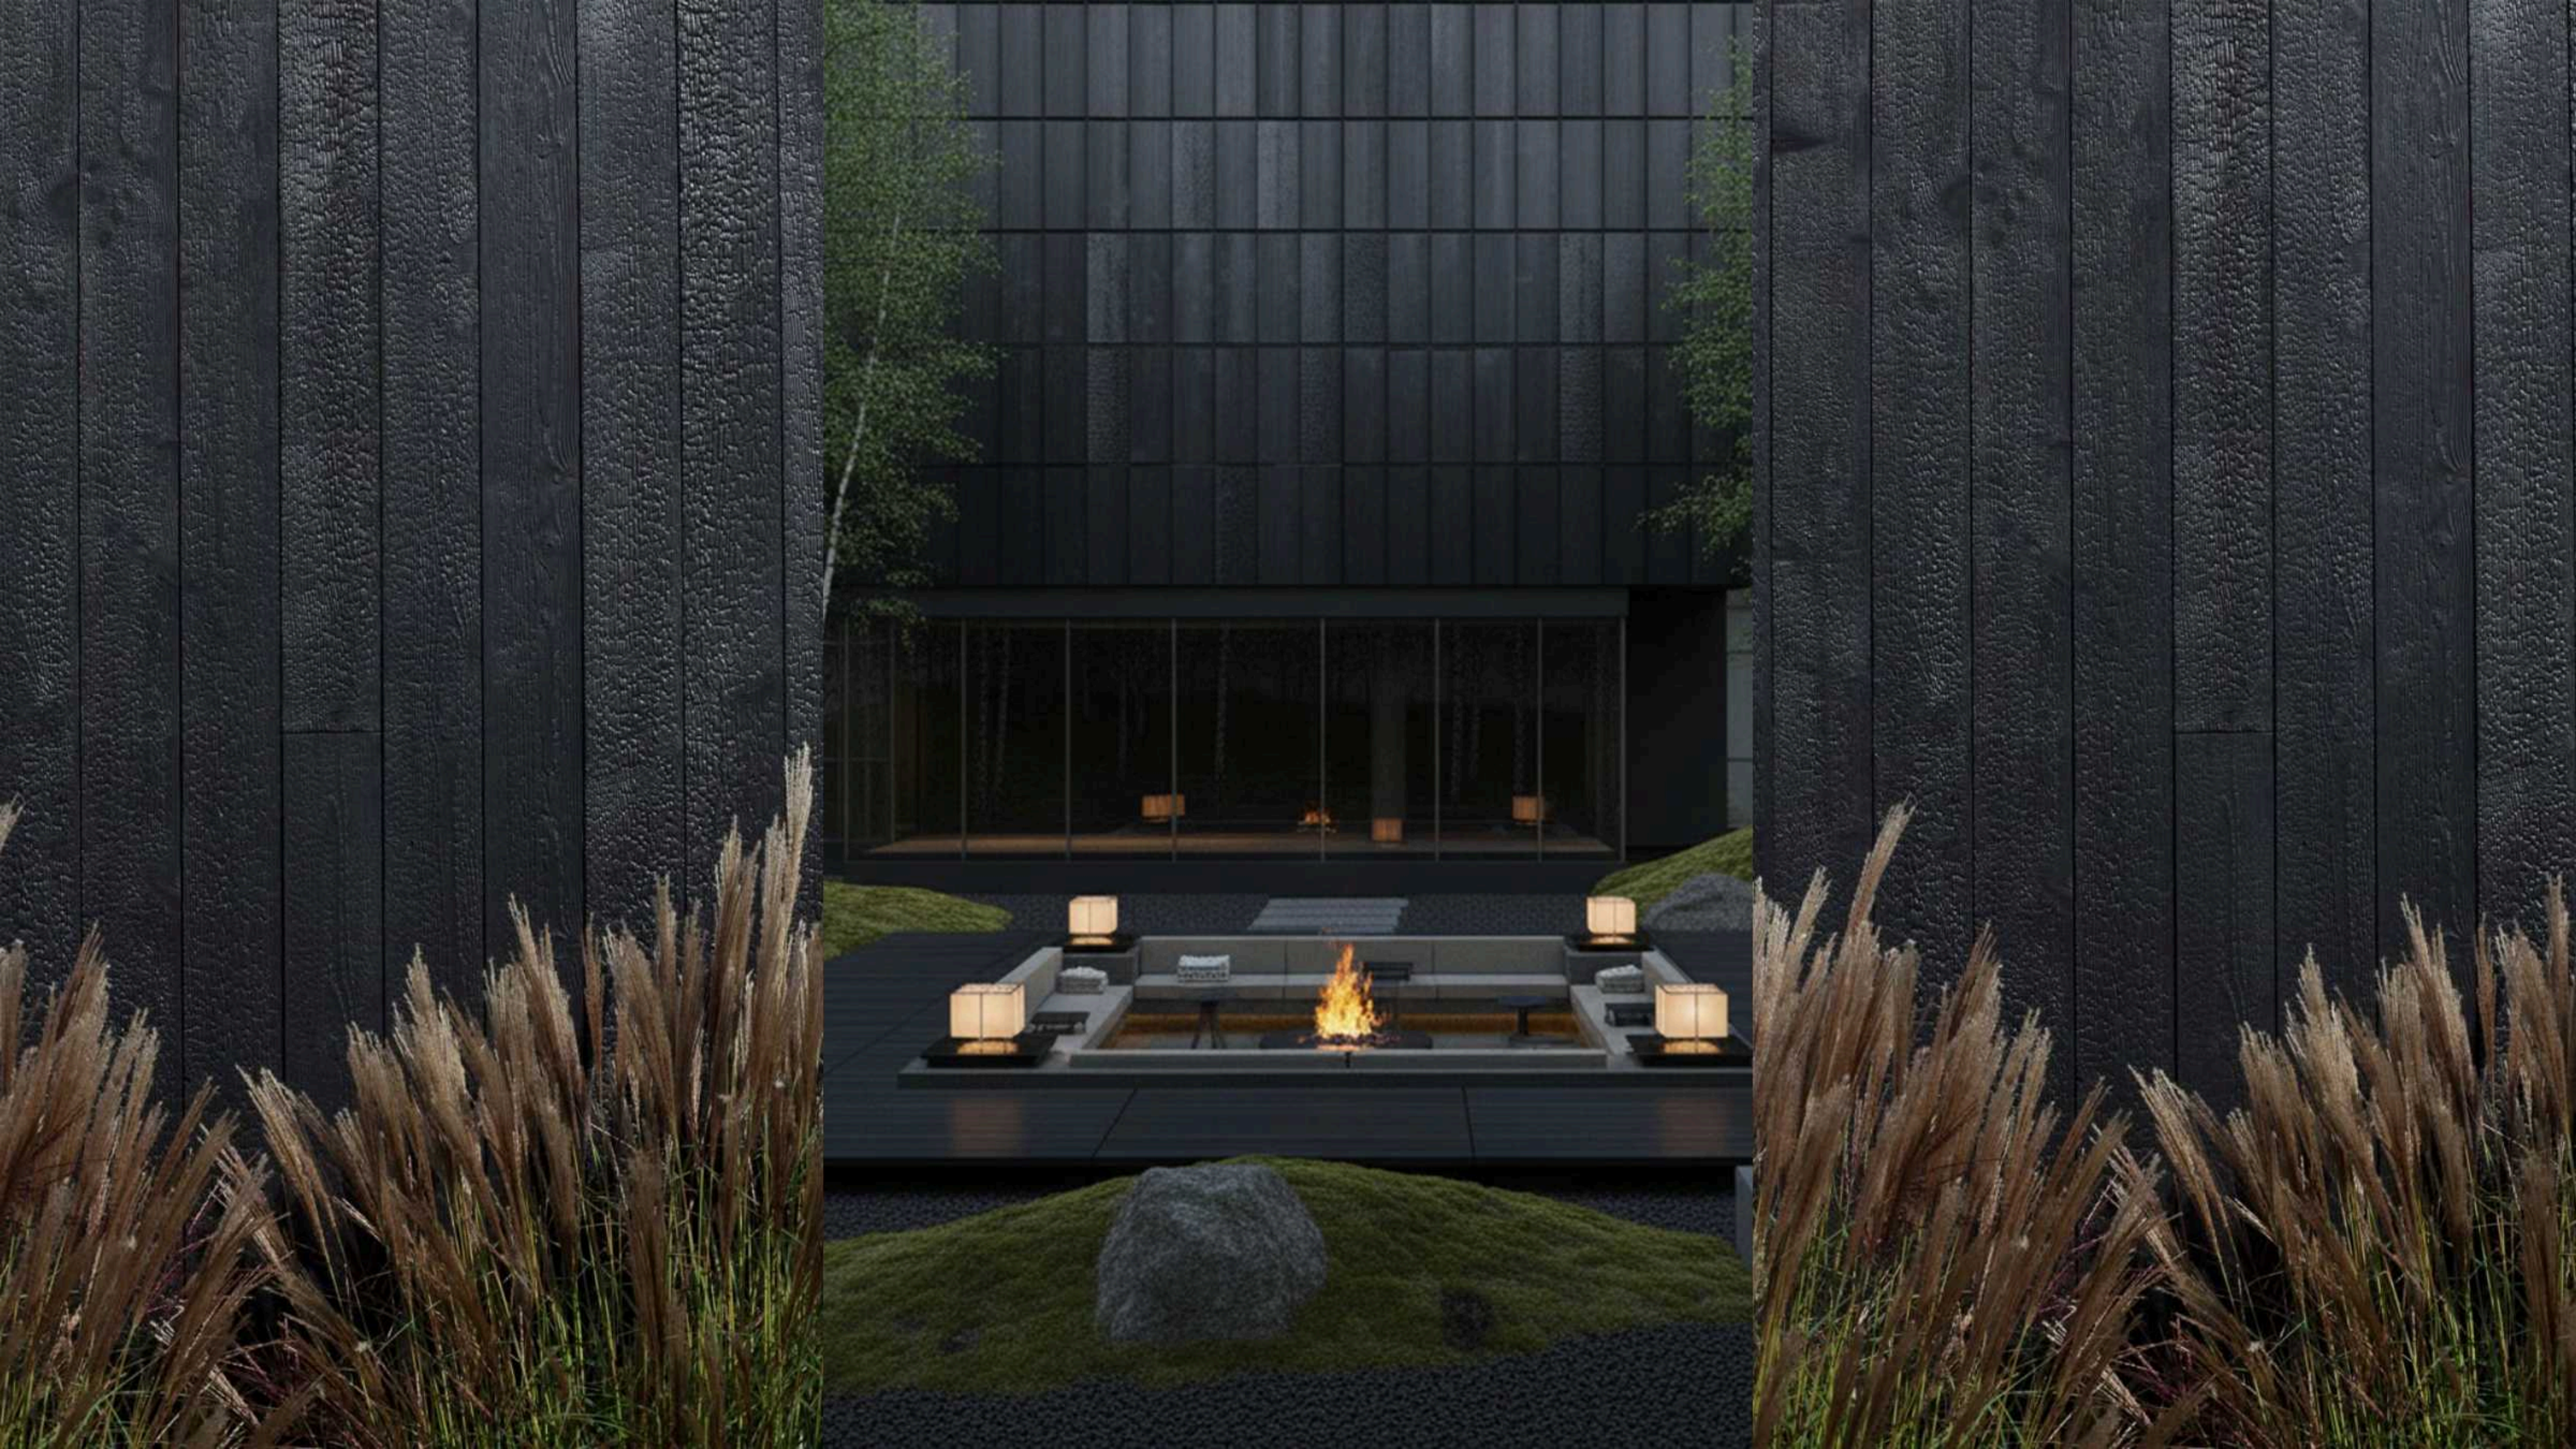



产品性能

- 10年质保，性价比高
- 防火性好，达B1级阻燃
- 湿热环境、盐碱地、海边等恶劣环境均可使用
- 防腐性能好、抗变形、防白蚁
- 纯实木，高档质感
- 可提前将颜色注入木材细胞，防褪色性好
- 维护简单方便



质保10年

防腐、防白蚁、耐变形

低分子树脂注入

高耐久户外改性木材

OPTIONS 1

第一优先选项



工艺：树脂注入
多层·杨木 1



工艺：树脂注入
多层·杨木 2



工艺：树脂注入

多层·新西兰无节松



乙酰化

Accoya®固雅木的生产工艺从内到外彻底改变了木材的化学构成，具有杰出的耐久性和不同凡响的尺寸稳定性。Accoya®固雅木可以被用于任何场合，从木门到木窗，从户外地板到外墙板和壁板，甚至那些曾被认为只有非可持续发展的材料才可使用的场合，因此，Accoya®固雅木迅速成为了各类户外应用的首选材料。

稳定性次于树脂注入，但代价大，不建议采用



工艺：乙酰注入

木种：新西兰无节松 1



工艺：乙酰注入

木种：新西兰无节松 2



IKIGAI: ACCOYA SHOU SUGI BAN

Accoya




MATSU: ACCOYA SHOU SUGI BAN

Accoya



NIGIRI: ACCOYA SHOU SUGI BAN

Accoya

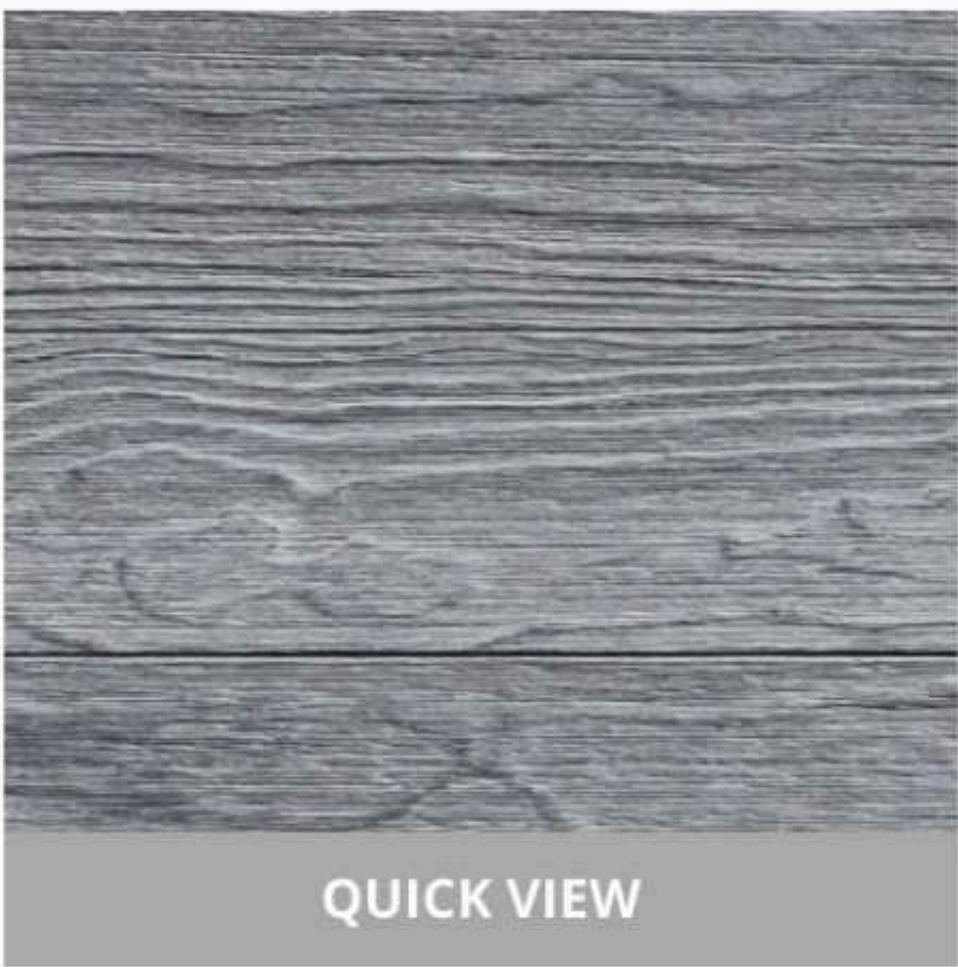

SAMITTO: ACCOYA SHOU SUGI BAN

Accoya



KALĀ: ACCOYA SHOU SUGI BAN

Accoya



UNAGI 2.0: ACCOYA SHOU SUGI BAN

Accoya

ACCOYA

Accoya® wood is the result of decades of research and development that has brought together a long-established, extensively proven wood modification technique and leading-edge patented technology – acetylation to create a high performance wood, ideal for outdoor use and challenging applications. By significantly enhancing the durability and dimensional stability of fast-growing and abundantly available certified wood species, **Accoya®** wood provides compelling environmental advantages over slow-growing hardwoods (which are often unsustainably sourced), woods treated with toxic preservative chemicals, and non-renewable carbon-intensive materials such as plastics, steel and concrete. All our CHARRED shou sugi ban Accoya® products are FSC certified and come with a 50-year warranty on the wood when used above ground; 25-year warranty when used at/below ground level.




THERMORY

热改性 · 碳化 · 橡木 / 非洲柚木 / 桉木

OPTIONS 2

其次选项

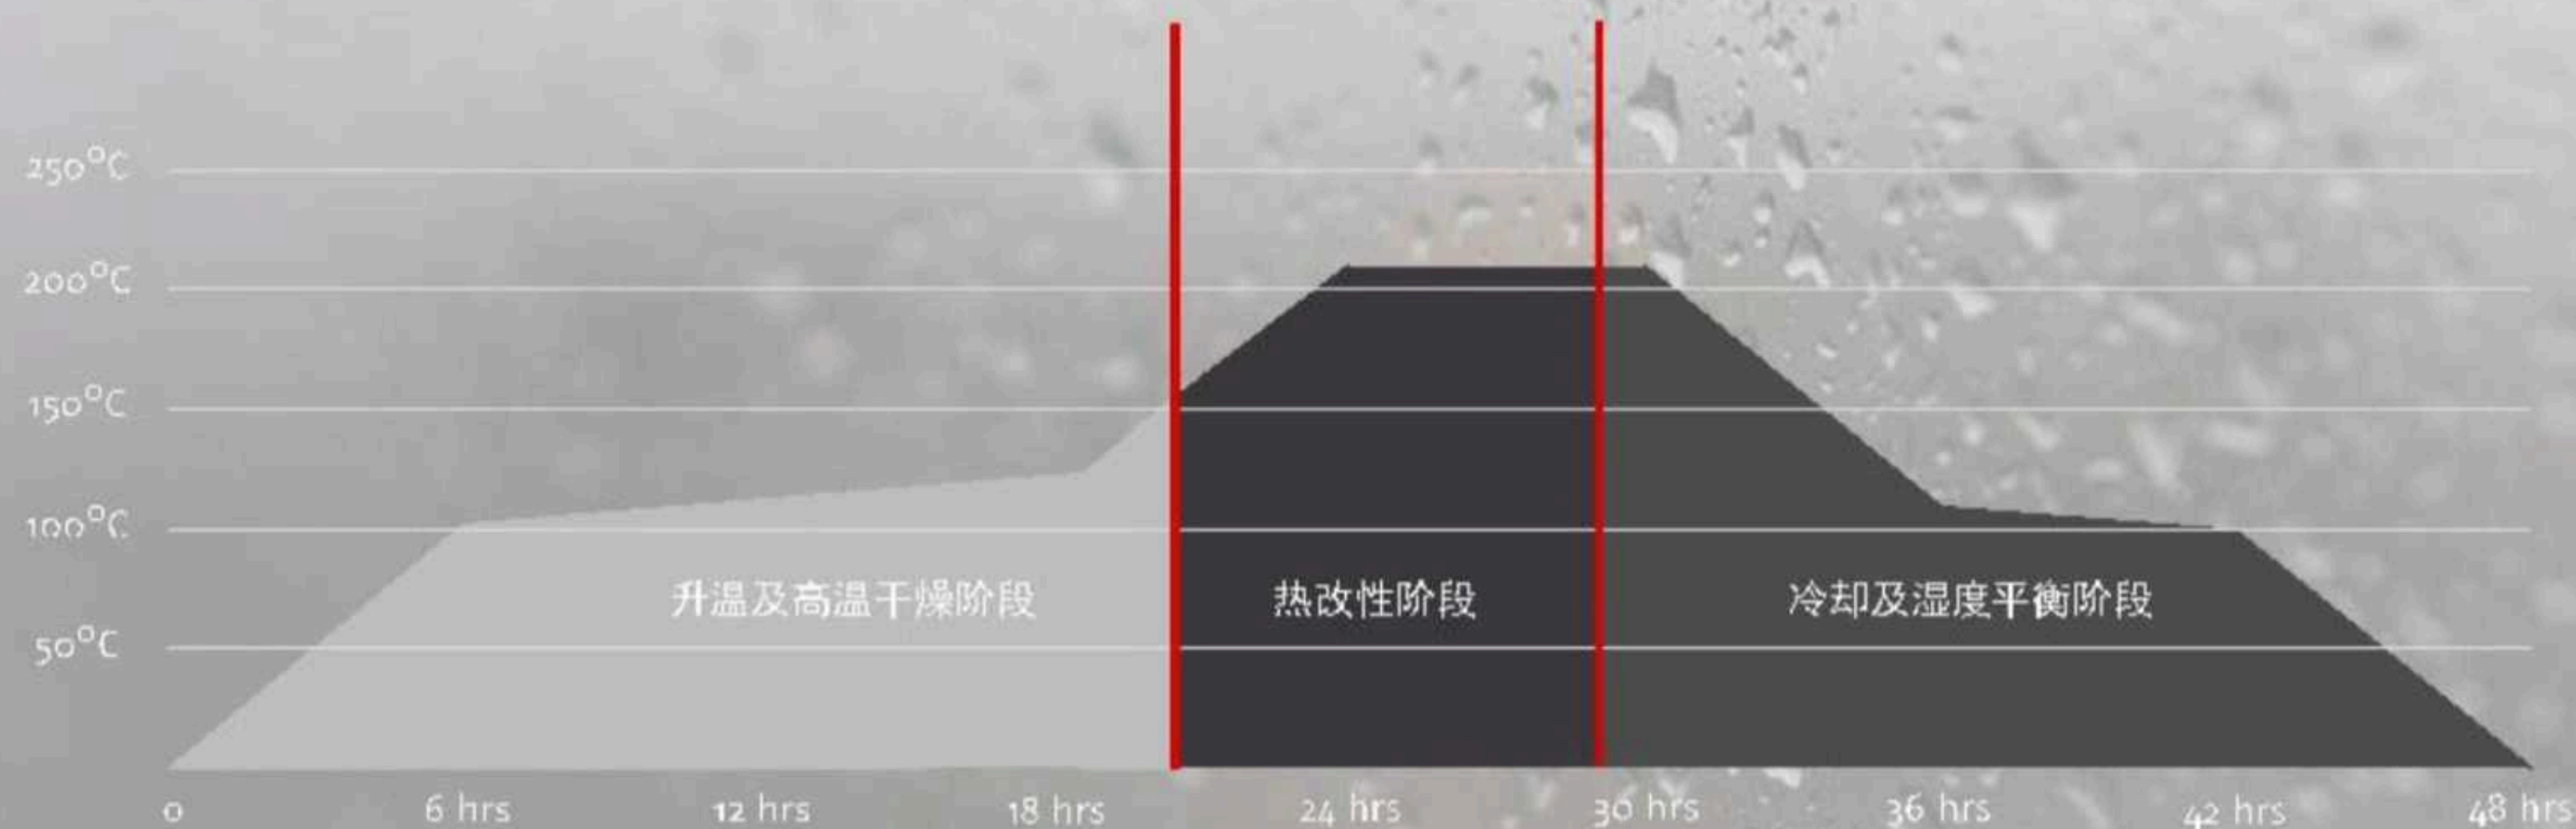

1. 升温及干燥阶段

快速升温至100°C，随后稳定升温至130°C，依靠此过程中的热量和蒸汽来干燥木材，在此阶段，木材含水率逐渐降到接近于零。



2. 热改性阶段

木材被加热到190-215°C后，并保持峰值温度约2-3小时，此时蒸汽可以起到保护作用，防止木材然后，同时控制木材中的化学变化。



3. 冷却及湿度平衡阶段

运用水喷雾系统使木材在受控条件下冷却，当温度降至80-90°C时，适当加湿木材，使其达到适当的湿度水平，以供最终使用。



工艺：碳化

木种：橡木 1



工艺：碳化

木种：橡木 2



工艺：碳化

木种：非洲柚木 1



工艺：碳化

木种：非洲柚木 2

碳化桧木



工艺：碳化

木种：桧木 无节



工艺：碳化
木种：桉木 有节




THERMORY

热改性 · 碳化 · 赤松/云杉

OPTIONS 3

第三选项

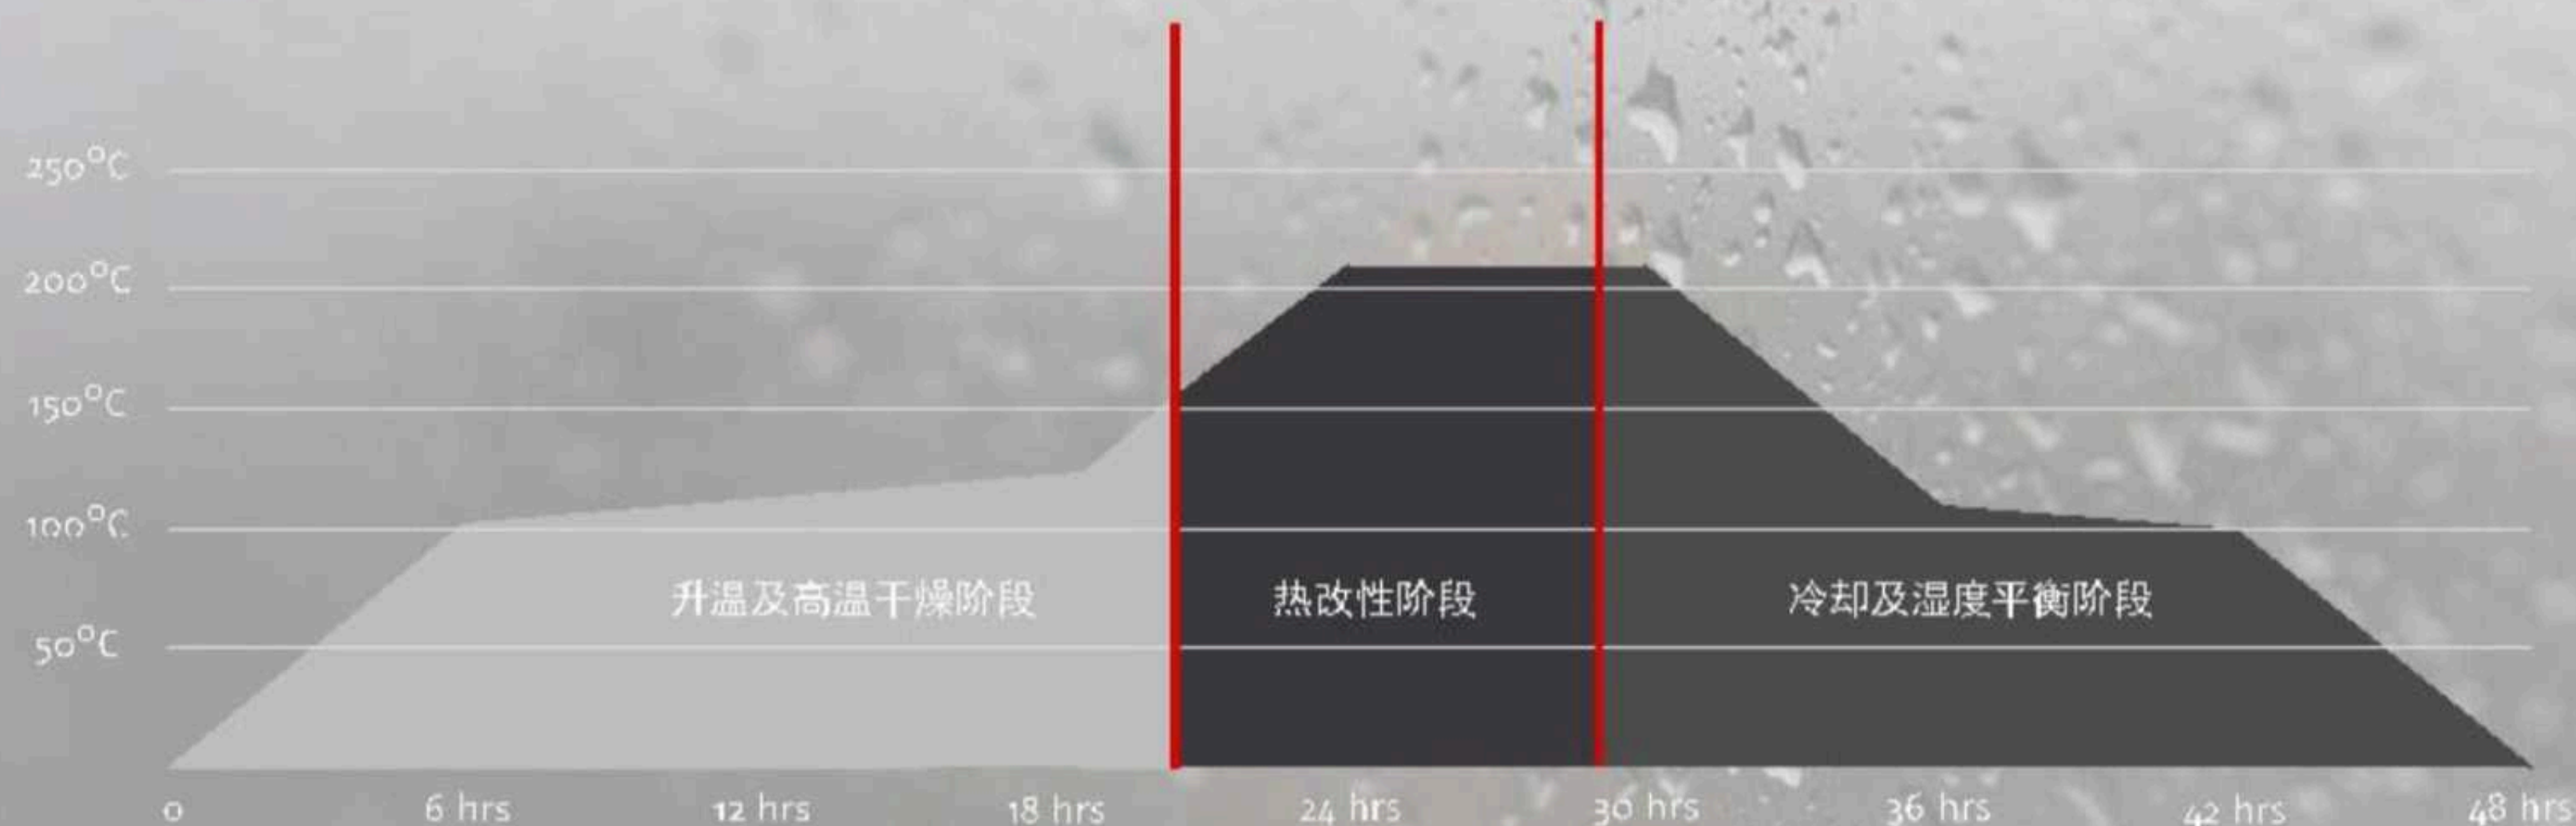

1. 升温及干燥阶段

快速升温至100°C，随后稳定升温至130°C，依靠此过程中的热量和蒸汽来干燥木材，在此阶段，木材含水率逐渐降到接近于零。



2. 热改性阶段

木材被加热到190-215°C后，并保持峰值温度约2-3小时，此时蒸汽可以起到保护作用，防止木材然后，同时控制木材中的化学变化。



3. 冷却及湿度平衡阶段

运用水喷雾系统使木材在受控条件下冷却，当温度降至80-90°C时，适当加湿木材，使其达到适当的湿度水平，以供最终使用。



工艺：碳化
木种：赤松



工艺：碳化

木种：赤松

加工：深拉丝



工艺：碳化

木种：赤松

加工：拉槽



工艺：碳化

木种：云杉

加工：浅拉丝

碳化云杉-浅拉丝

无改性·直接烧

未处理松木-火烧



工艺：无

木种：松木 1



工艺：无

木种：松木 2

其他·类似效果



工艺：压纹

产地：进口



THERMORY

工艺：压纹

产地：国产

压纹-国产



工艺：堆漆 · 裂漆

[更多资讯](#)



Marugame

🏷️ **Type of wood:** Accoya®, FSC®

📌 **Origin of wood:** New Zealand

🏠 **Application:** Interior & facade



Yoroï

🏷️ **Material :** Bamboo, FSC®

📌 **Origin of wood :** China

🏠 **Application:** Interior & facade - fire class B



Shodoshima

🏷️ **Type of wood :** Douglas, FSC®

📌 **Origin of wood :** The Netherlands

🏠 **Application:** Interior & facade



Naoshima

🏷️ **Type of wood :** Douglas, FSC®

📌 **Origin of wood :** The Netherlands

🏠 **Application:** Facade



Sakaide

🏷️ **Type of wood:** Douglas, FSC®

📌 **Origin of wood :** The Netherlands

🏠 **Application:** Interior & facade



Nakatado

🏷️ **Type of wood :** Thermal Radiata Pine, FSC®

📌 **Origin of wood :** New Zealand

🏠 **Application:** Interior & facade



Omiyama

 **Type of wood :** Fraké wood

 **Origin of wood :** Cameroon

 **Application:** Interior & facade



Kyushu

 **Type of wood :** Thermal Radiata Pine, FSC®

 **Origin of wood:** New Zealand

 **Application:** Interior & facade




Takamatsu

 **Type of wood :** Douglas, FSC®

 **Origin of wood:** The Netherlands

 **Application:** Interior & facade

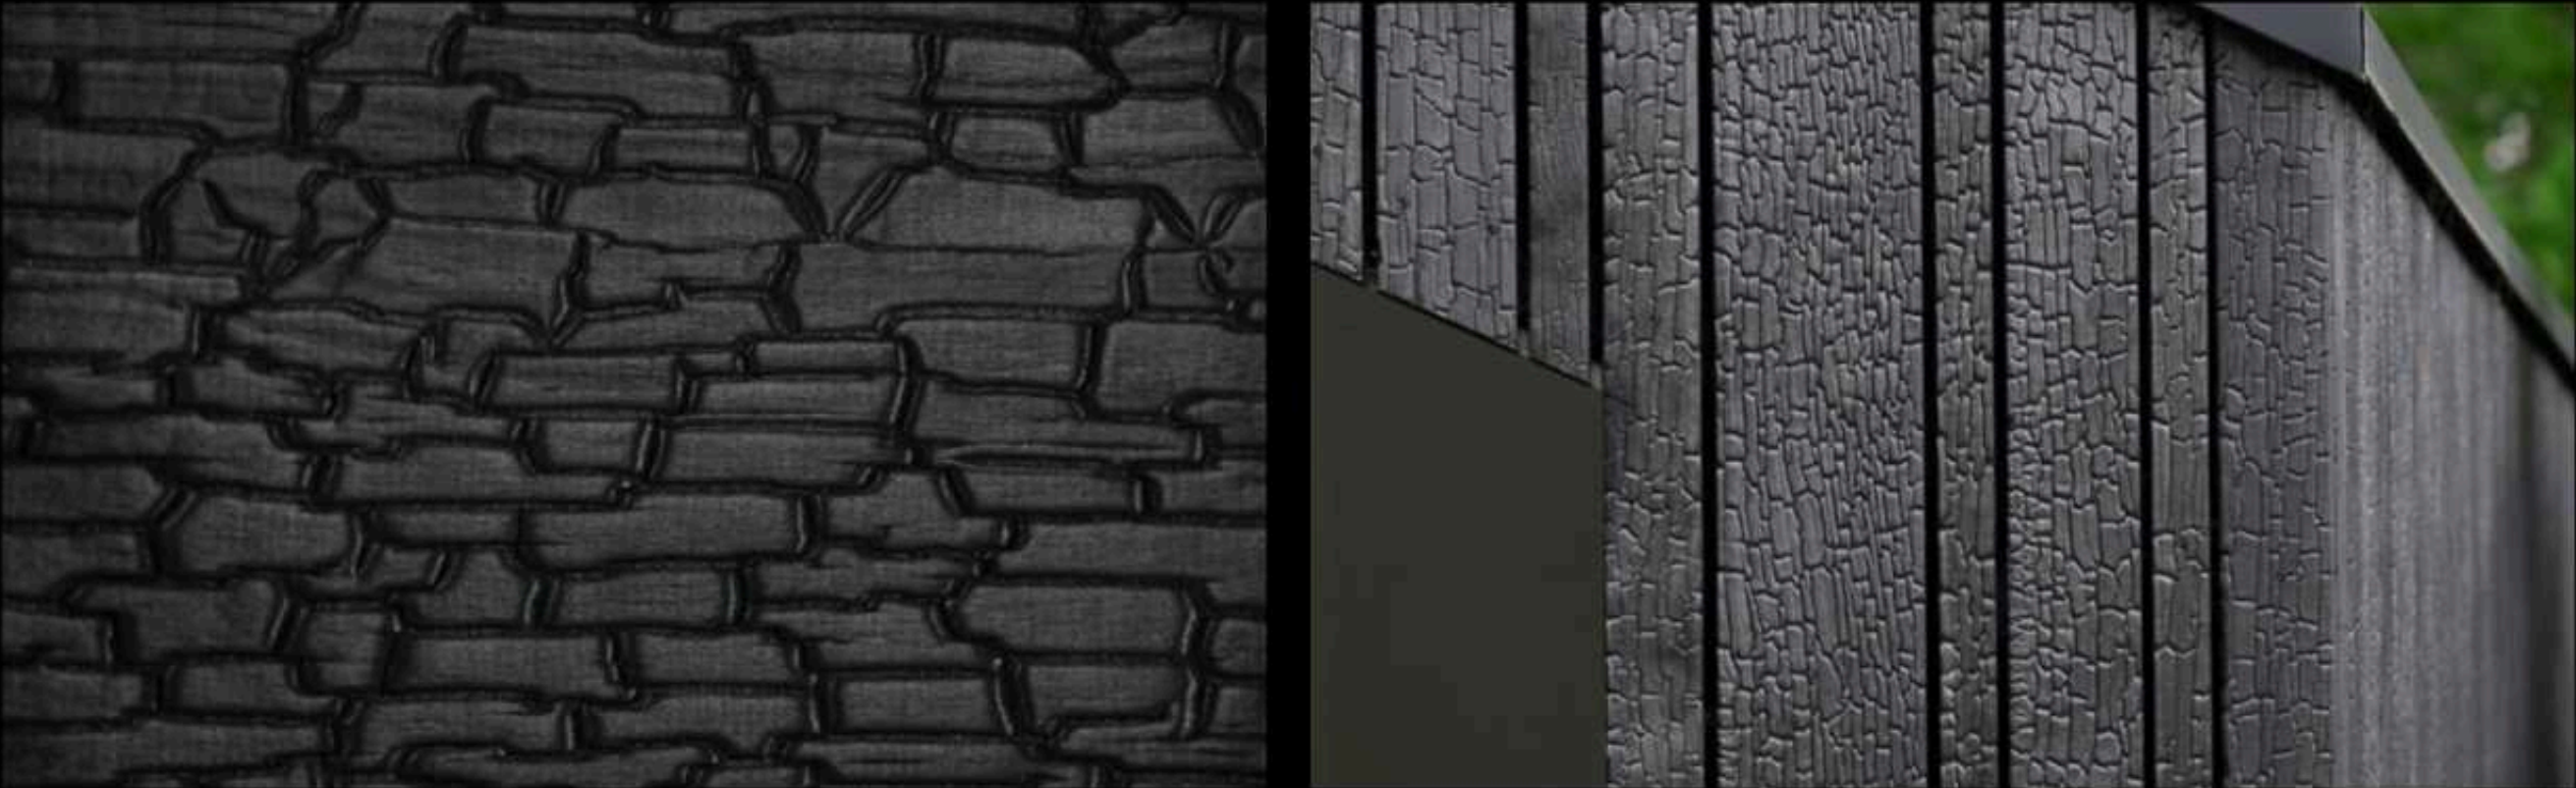

Marugame

Characteristic, versatile and a silvery charred layer

This beautiful, charred wood has a characteristic and equally divided pattern. The silvery glow of the charred layer has a different look depending on the angle of the sunlight. The hard charred layer makes Marugame ideal as a sustainable cladding for roofs and facades. Marugame is also very suitable as an attractive eye- catcher in a special interior.

Wood type

The wood used for Marugame is Accoya® of the Pinus Radiata tree, a fast-growing pine species. The wood is modified through a non-toxic acetylation process. Accoya® is labelled with durability class 1 and other quality certifications (i.a. KOMO, RAL, BBA, WDMA), and a cradle-to- cradle gold certification. The wood has a lifespan of at least 50 years above ground, and 25 years when in contact with soil and fresh water.

Marugame is a natural product. This means that individual planks may differ from one another.

Technical specifications

 Type of wood:	Accoya®, FSC®
 Origin of wood:	New Zealand
 Application:	Interior & facade
 Treatment:	Marugame fixated: Bito White
 Fire class:	D (European standard – EN13501)
 Maintenance:	None
 Length:	2400 mm, 3000 mm, 3600 mm, 4200 mm and 4800 mm
 Thickness:	13 mm and 22 mm
 Width:	100 mm, 150 mm and 200 mm
 Mounting method:	Stainless steel screws with a black head

Show less ^



Yoroï

Deeply charred bamboo, natural appearance, refined markings and fire class B

Product description

Yoroï’s hard carbon layer and refined markings take on a silvery glow in the sun. The deeply charred bamboo has a natural appearance and was developed specifically for situations where fire class B is required, e.g. public buildings, high-rise buildings and escape routes. This makes Yoroï ideally suited as a sustainable façade cladding. Yoroï also stands out indoors.

Material

Yoroï is made from FSC® thermally modified bamboo from China. The boards are made by compressing bamboo fibres. The bamboo boards are then individually charred by hand in our furnace. Yoroï gets an extra natural fire retardant through the charring. Therefore, no fire retardants are added that could leach out. The fire resistance of Yoroï is guaranteed throughout its entire lifespan. The fire resistance is derived from the density of the material and does not diminish during its service life.

Fire class B & LCA

Fire class B reports are available for Yoroï and you can request the Life Cycle Analyses (LCA). Yoroï is a natural product. This means that individual planks may differ from one another.

Technical specifications

🔪 Material :	Bamboo, FSC®
📍 Origin of wood :	China
🏠 Application:	Interior & facade - fire class B
⚠ Treatment:	Yoroï fixated: Bito White
🔥 Fire class:	B-s1, d0 (European standard EN 13823)
📄 Certificate:	LCA ISO 14040/44
★ Maintenance:	None
⚖ Length:	1850 mm
⚖ Thickness:	18 mm
✂ Width :	155 mm
🔩 Mounting method :	Black stainless screws or Grad assembly system

Show less ^



Shodoshima

Lively flame pattern, robust, versatile, contemporary

Product description

For Shodoshima, the wood is sawn parallel to the growth rings (plain sawn). This creates a beautiful flame drawing. After burning in the oven, the wood is brushed and treated. The robust and lively grain structure is clearly visible and shines beautifully in the sun.

Wood type

Shodoshima is made from the Douglas fir, which comes from FSC® certified forests from the Netherlands. Thanks to the durability class 3, Shodoshima is very suitable as beautiful, durable facade cladding. The knots in the wood give an extra irregular effect. During the charring process, knots up to 2 cm in size can fall out.

Shodoshima is a natural product. This means that individual planks may differ from one another.

Technical specifications

🔪	Type of wood :	Douglas, FSC®
📍	Origin of wood :	The Netherlands
🏠	Application:	Interior & facade
⚠️	Treatment:	Bito Black (Teknos)
🔥	Fire class :	D – B after impregnation (European standard - EN13501)
★	Maintenance:	3-5 years
📏	Length:	Up to 5000 mm
📏	Thickness :	23 - 30 mm
📏	Width :	60 mm to 250 mm
🔩	Mounting method:	Stainless steel screws with a black head

Show less ^



Naoshima

Characteristic, irregular pattern and a beautiful patina

Product description

Naoshima has a natural and irregular pattern that shines beautifully in the sun. The brittle charred layer weathers and ages, giving it more character over the years. This fits within the Japanese philosophy of Wabi Sabi, a philosophy that embraces the calming beauty of the transient and the imperfect.

Wood type

Naoshima is made from the Douglas fir. A type of wood originating from FSC® certified forests in the Netherlands. The presence of knots in the wood makes it more characteristic and are visible in the charred layer. During the charring process, knots up to 2 cm in size can fall out. This gives it an extra irregular effect. Naoshima is labelled with a durability class 3 certification and can be used as a sustainable choice for cladding.

Naoshima is a natural product. This means that individual planks may differ from one another.

Technical specifications

 Type of wood :	Douglas, FSC®
 Origin of wood :	The Netherlands
 Application:	Facade
 Treatment:	Naoshima strong: eco protective laye
 Fire class :	D (European standard – EN13501)
 Maintenance:	None
 Length:	Up to 5000 mm
 Thickness:	23 mm – 30 mm
 Width :	60 mm - 250 mm
 Mounting method :	Stainless steel screws with a black head

Show less ^



Sakaide

Beautiful flame pattern, solid sawn and a warm appearance

Product description

Sakaide has a beautiful, contrasting flame pattern, giving the wood a rustic, warm appearance. The planks are sawn flat (with the annual rings), and then charred one by one in our oven. The planks are then carefully brushed and treated.

Wood type


Sakaide is made from the Douglas fir. A type of wood originating from FSC® certified forests in the Netherlands. The knots give the wood an extra uneven effect. During the charring process, knots up to 2 cm in size can fall out. It has durability class 3, which makes it ideal for sustainable cladding.

Sakaide is a natural product. This means that individual planks may differ from one another.

Technical specifications

 Type of wood:	Douglas, FSC®
 Origin of wood :	The Netherlands
 Application:	Interior & facade
 Treatment:	Bito Clear or Bito Orange
 Fire class:	D (European standard – EN13501)
 Maintenance:	3 - 5 years
 Length :	Up to 5000 mm
 Thickness :	23 mm - 30 mm
 Width:	60 mm - 250 mm
 Mounting method :	Stainless steel screws with a black head

Show less ^

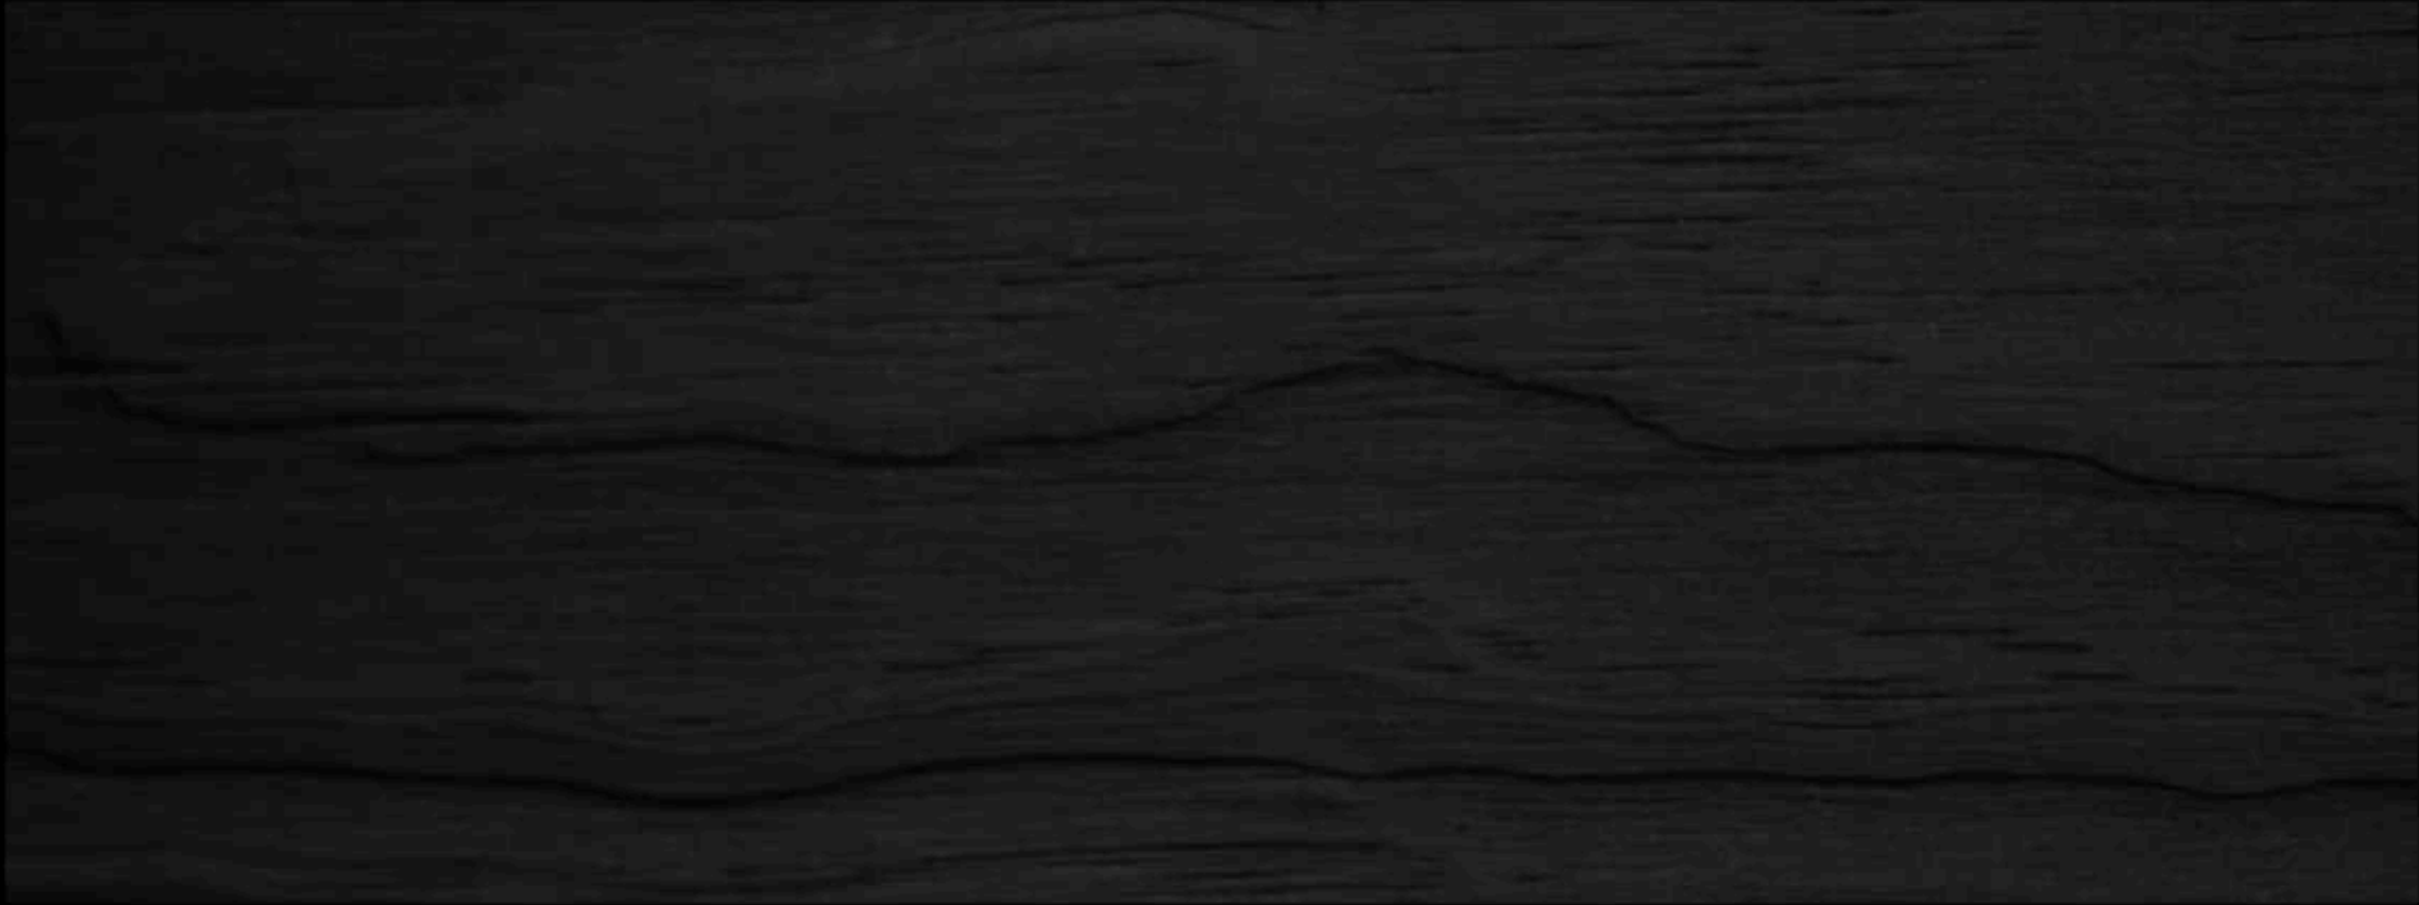

Nakatado

Special flame pattern, brushed and lively grain structure

Product description

After this beautiful type of wood has been carefully charred by our fire masters, Nakatado is brushed and treated. This is how the lively grain structure becomes visible, with a height difference of 1 to 2 mm between the higher and lower parts of the grains. The flame pattern on the wood creates a calm and rustic pattern. Nakatado is resistant to all weather conditions and does not stain.

Wood type

Nakatado is made from Pinus Radiata, a fast-growing pine species from FSC® certified forests in New Zealand. The wood is thermally modified by heating it up to 230° Celsius. Because of this process, the wood type has a durability class 1 (EN350) certification. Nakatado has a lifespan of at least 30 years.

Nakatado is a natural product. This means that individual planks may differ from one another.

Technical specifications

Type of wood :	Thermal Radiata Pine, FSC®
Origin of wood :	New Zealand
Application:	Interior & facade
Treatment:	Bito Black (Teknos)
Fire class:	D (European standard – EN13501)
Maintenance:	3-5 years
Length:	3000 mm, 3600 mm, 4200 mm and 4800 mm
Thickness:	21 mm and 27 mm
Width :	68 - 190 mm
Mounting method :	Stainless steel screws with a black head

Show less ^



Omiyama

Hard charred layer, irregular pattern and a matt appearance

Product description

Omiyama’s hard charred layer gets a beautiful bronze glow in the sun. The charred layer is burnt deep and has a natural uneven structure. This variant is resistant to heavy weather conditions. This makes Omiyama very suitable as a durable finish on facades.

Omiyama is also a powerful eye-catcher indoors. Fixated, Omiyama becomes deep matt black in colour.

Wood type

Omiyama is made from Frake; a fast-growing limba from Cameroon. For Omiyama, a hydrothermally modified variant of Frake is used. By heating up the wood, the cell structure changes, making it more sustainable.

Omiyama is a natural product. This means that individual planks may differ from one another.

Technical specifications

Type of wood :	Fraké wood
Origin of wood :	Cameroon
Application:	Interior & facade
Treatment:	Omiyama fixated: Bito White
Fire class :	D (European standard – EN13501)
Maintenance:	None
Length:	Up to 5000 mm
Thickness:	21, 30 or 41 mm
Width:	95, 120, 145 and 195 mm
Mounting method :	Stainless steel screws with a black head

Show less ^



Kyushu

Robust scales, versatile and contemporary

Product description

Kyushu has a robust pattern with large scales. After the wood has been carefully charred by our fire masters Kyushu is brushed and treated afterwards.This makes the robust scales clearly visible.

Wood type

Kyushu is made from Pinus Radiata, a fast-growing pine species from FSC® certified forests in New Zealand. The wood is thermally modified by heating it up to 230° Celsius. Because of this process, the wood type has a durability class 1 (EN350) certification. Kyushu has a lifespan of at least 30 years.

Kyushu is a natural product. This means that individual planks may differ from one another.

Technical specifications

 Type of wood :	Thermal Radiata Pine, FSC®
 Origin of wood:	New Zealand
 Application:	Interior & facade
 Treatment:	Bito Black (Teknos)
 Fire class:	D (European standard – EN13501)
 Maintenance:	3-5 years
 Length :	3000 mm, 3600 mm, 4200 mm and 4800 mm
 Thickness :	21 mm and 27 mm
 Width :	68 - 190 mm
 Mounting method :	Stainless steel screws with a black head

Show less ^



Takamatsu

Classic look, fine linear structure and quarter sawn

Product description

For Takamatsu, the wood is sawn on the annual rings (quarter/false quarter). This way of sawing gives Takamatsu its special, fine linear structure and a classic, modest appearance. After careful charring in our furnace, the wood is brushed and treated.

Wood type

Takamatsu is made from the Douglas fir; a type of wood originating from FSC® certified forests in the Netherlands. The presence of knots in the wood makes it more characteristic and are visible in the charred layer. During the charring process, knots up to 2 cm in size can fall out. This gives it an extra irregular effect.

Takamatsu is a natural product. This means that individual planks may differ from one another.

Technical specifications

 Type of wood :	Douglas, FSC®
 Origin of wood:	The Netherlands
 Application:	Interior & facade
 Treatment:	Bito Black (Teknos)
 Fire class:	D – B after impregnation (European standard - EN13501)
 Maintenance:	3-5 years
 Length:	Up to 5000 mm
 Thickness:	23 mm up to 40 mm
 Width :	60 mm up to 150 mm
 Mounting method :	Stainless steel screws with a black head

Show less ^



Marugame

Type of wood:

Accoya®, FSC®

Origin of wood:

New Zealand

Application:

Interior & facade



Yoroi

Material :

Bamboo, FSC®

Origin of wood :

China

Application:

Interior & facade - fire class B



Shodoshima

Type of wood :

Douglas, FSC®

Origin of wood :

The Netherlands

Application:

Interior & facade



Naoshima

Type of wood :

Douglas, FSC®

Origin of wood :

The Netherlands

Application:

Facade



Sakaide

Type of wood:

Douglas, FSC®

Origin of wood :

The Netherlands

Application:

Interior & facade



Nakatado

Type of wood :

Thermal Radiata Pine, FSC®

Origin of wood :

New Zealand

Application:

Interior & facade



Omiyama

Type of wood :

Fraké wood

Origin of wood :

Cameroon

Application:

Interior & facade



Kyushu

Type of wood :

Thermal Radiata Pine, FSC®

Origin of wood:

New Zealand

Application:

Interior & facade



Takamatsu

Type of wood :

Douglas, FSC®

Origin of wood:

The Netherlands

Application:

Interior & facade

@刘传宏 你列出来的花旗松直接火烧不做炭化或者其他处理的话没办法用在这样的场所

2025年9月24日



蔡秋婷

12:55

我们这边是安排了5-6个树种做火烧处理，根据木材不同，火烧后呈现不同的效果（照片师傅烧好我拍给您）

蔡秋婷

12:55

您发的这个 有的是在火烧基础上叠加了其他的处理工艺，不单单只是火烧了您截图的这些工艺都可以去做，但是这个需要准备样品的时间要更久一些

Shou Sugi Ban, or Yakisugi, is a traditional Japanese technique in which coniferous wood is charred on one side. Traditionally, this was done by binding three boards together to form a chimney and starting a fire at the bottom. The original reason for charring was, ironically, fire prevention. As Japanese houses were mostly made of wood, inhabitants of the villages and towns were very aware of fire risks. The scorching of the façades created a fire-retardant carbon layer. They also discovered that this layer offered good protection against vermin and fungus. The ancient art of Shou Sugi Ban is still being used on houses on the islands of Kanawa’s prefecture. Shou Sugi Ban or Yakisugi ties in with the Japanese life philosophy of Wabi Sabi, and the pure vision of beauty.

Does the carbon layer always stay the same?

This depends on the type, but in principle the carbon layer of our burnt wood weathers under the influence of wind, rain and hail. The lifespan of the carbon layer depends on the orientation of the facade and the location of the building. The black carbon layer of our burnt wood ages over the years and then acquires a beautiful patina (weathering), such as a light sheen, or a craquelé surface, for example. The natural aging and weathering over time does not detract from the visual appeal, on the contrary, it contributes to it! This fits within the above-mentioned Japanese philosophy of life of Wabi Sabi. On the product data sheets of our products (downloadable on the product page), you can see how the wood ages.

For indoor use we always fix the charred wood. For the exterior we often advise not to fix the wood. This ensures that the charred wood retains a beautiful, natural shine and is also more durable than when the wood is fixed. In the course of time the release of the wood will decrease and for a number of variants this will eventually stop. Most burned types of wood, also for exterior use, can also be fixed if desired. We will be happy to advise you about this.

How do I maintain the Shou Sugi Ban wood?

Unfixed planks with a carbon layer do not require any maintenance.

Wooden boards that have been burned and brushed have a stain or oil layer. This wood requires periodic maintenance every three to five years. If you do not maintain Shodoshima, Takamatsu, Nakatado and Sakaide exterior, the stain layer will eventually harden and flake. Below this, the white wood will emerge and ‘age’.

The product specification sheet that you will find on each product page explains exactly if and what maintenance the different products need. Would you like to find out more about Shou Sugi Ban wood? Feel free to contact us.

Shou Sugi Ban 或 Yakisugi 是一种传统的日本技术，其中针叶木的一侧被烧焦。传统上，这是通过将三块木板绑在一起形成烟囱并在底部生火来完成的。具有讽刺意味的是，炭化的最初原因是防火。由于日本的房屋大多是木头建造的，村庄和城镇的居民非常清楚火灾风险。外墙的烧焦形成了一层阻燃碳层。他们还发现，这一层可以很好地防止害虫和真菌。Shou Sugi Ban 的古老艺术至今仍在金轮县岛屿上的房屋上使用。Shou Sugi Ban 或 Yakisugi 与侘寂的日本生活哲学以及纯粹的美观联系在一起。

碳层是否始终保持不变？

这取决于类型，但原则上我们烧木的碳层会在风、雨和冰雹的影响下风化。碳层的寿命取决于立面的方向和建筑物的位置。我们烧焦的木材的黑色碳层会随着岁月的流逝而老化，然后获得美丽的铜绿（风化），例如浅色光泽或裂纹表面。随着时间的推移，自然老化和风化并没有减损视觉吸引力，相反，它有助于视觉吸引力！这符合上述侘寂的日本生活哲学。在我们产品的产品数据表（可在产品页面上下载）上，您可以看到木材是如何老化的。


对于室内使用，我们总是固定烧焦的木材。对于外部，我们经常建议不要固定木材。这确保了烧焦的木材保持美丽、自然的光泽，并且比固定木材时更耐用。随着时间的推移，木材的释放会减少，对于许多变体，这种情况最终会停止。如果需要，大多数燃烧类型的木材，也用于外部使用，也可以固定。我们很乐意为您提供建议。

如何保养 Shou Sugi Ban 木材？

带有碳层的未固定木板不需要任何维护。

经过烧毁和拉丝的木板有污渍或油层。这种木材需要每三到五年定期维护一次。如果不维护小豆岛、高松、中多堂和坂出的外观，污渍层最终会变硬和剥落。在此之下，白色木材将出现并“老化”。

您可以在每个产品页面上找到的产品规格表准确解释了不同产品是否需要以及需要什么维护。您想了解更多关于 Shou Sugi Ban 木材的信息吗？请随时与我们联系。

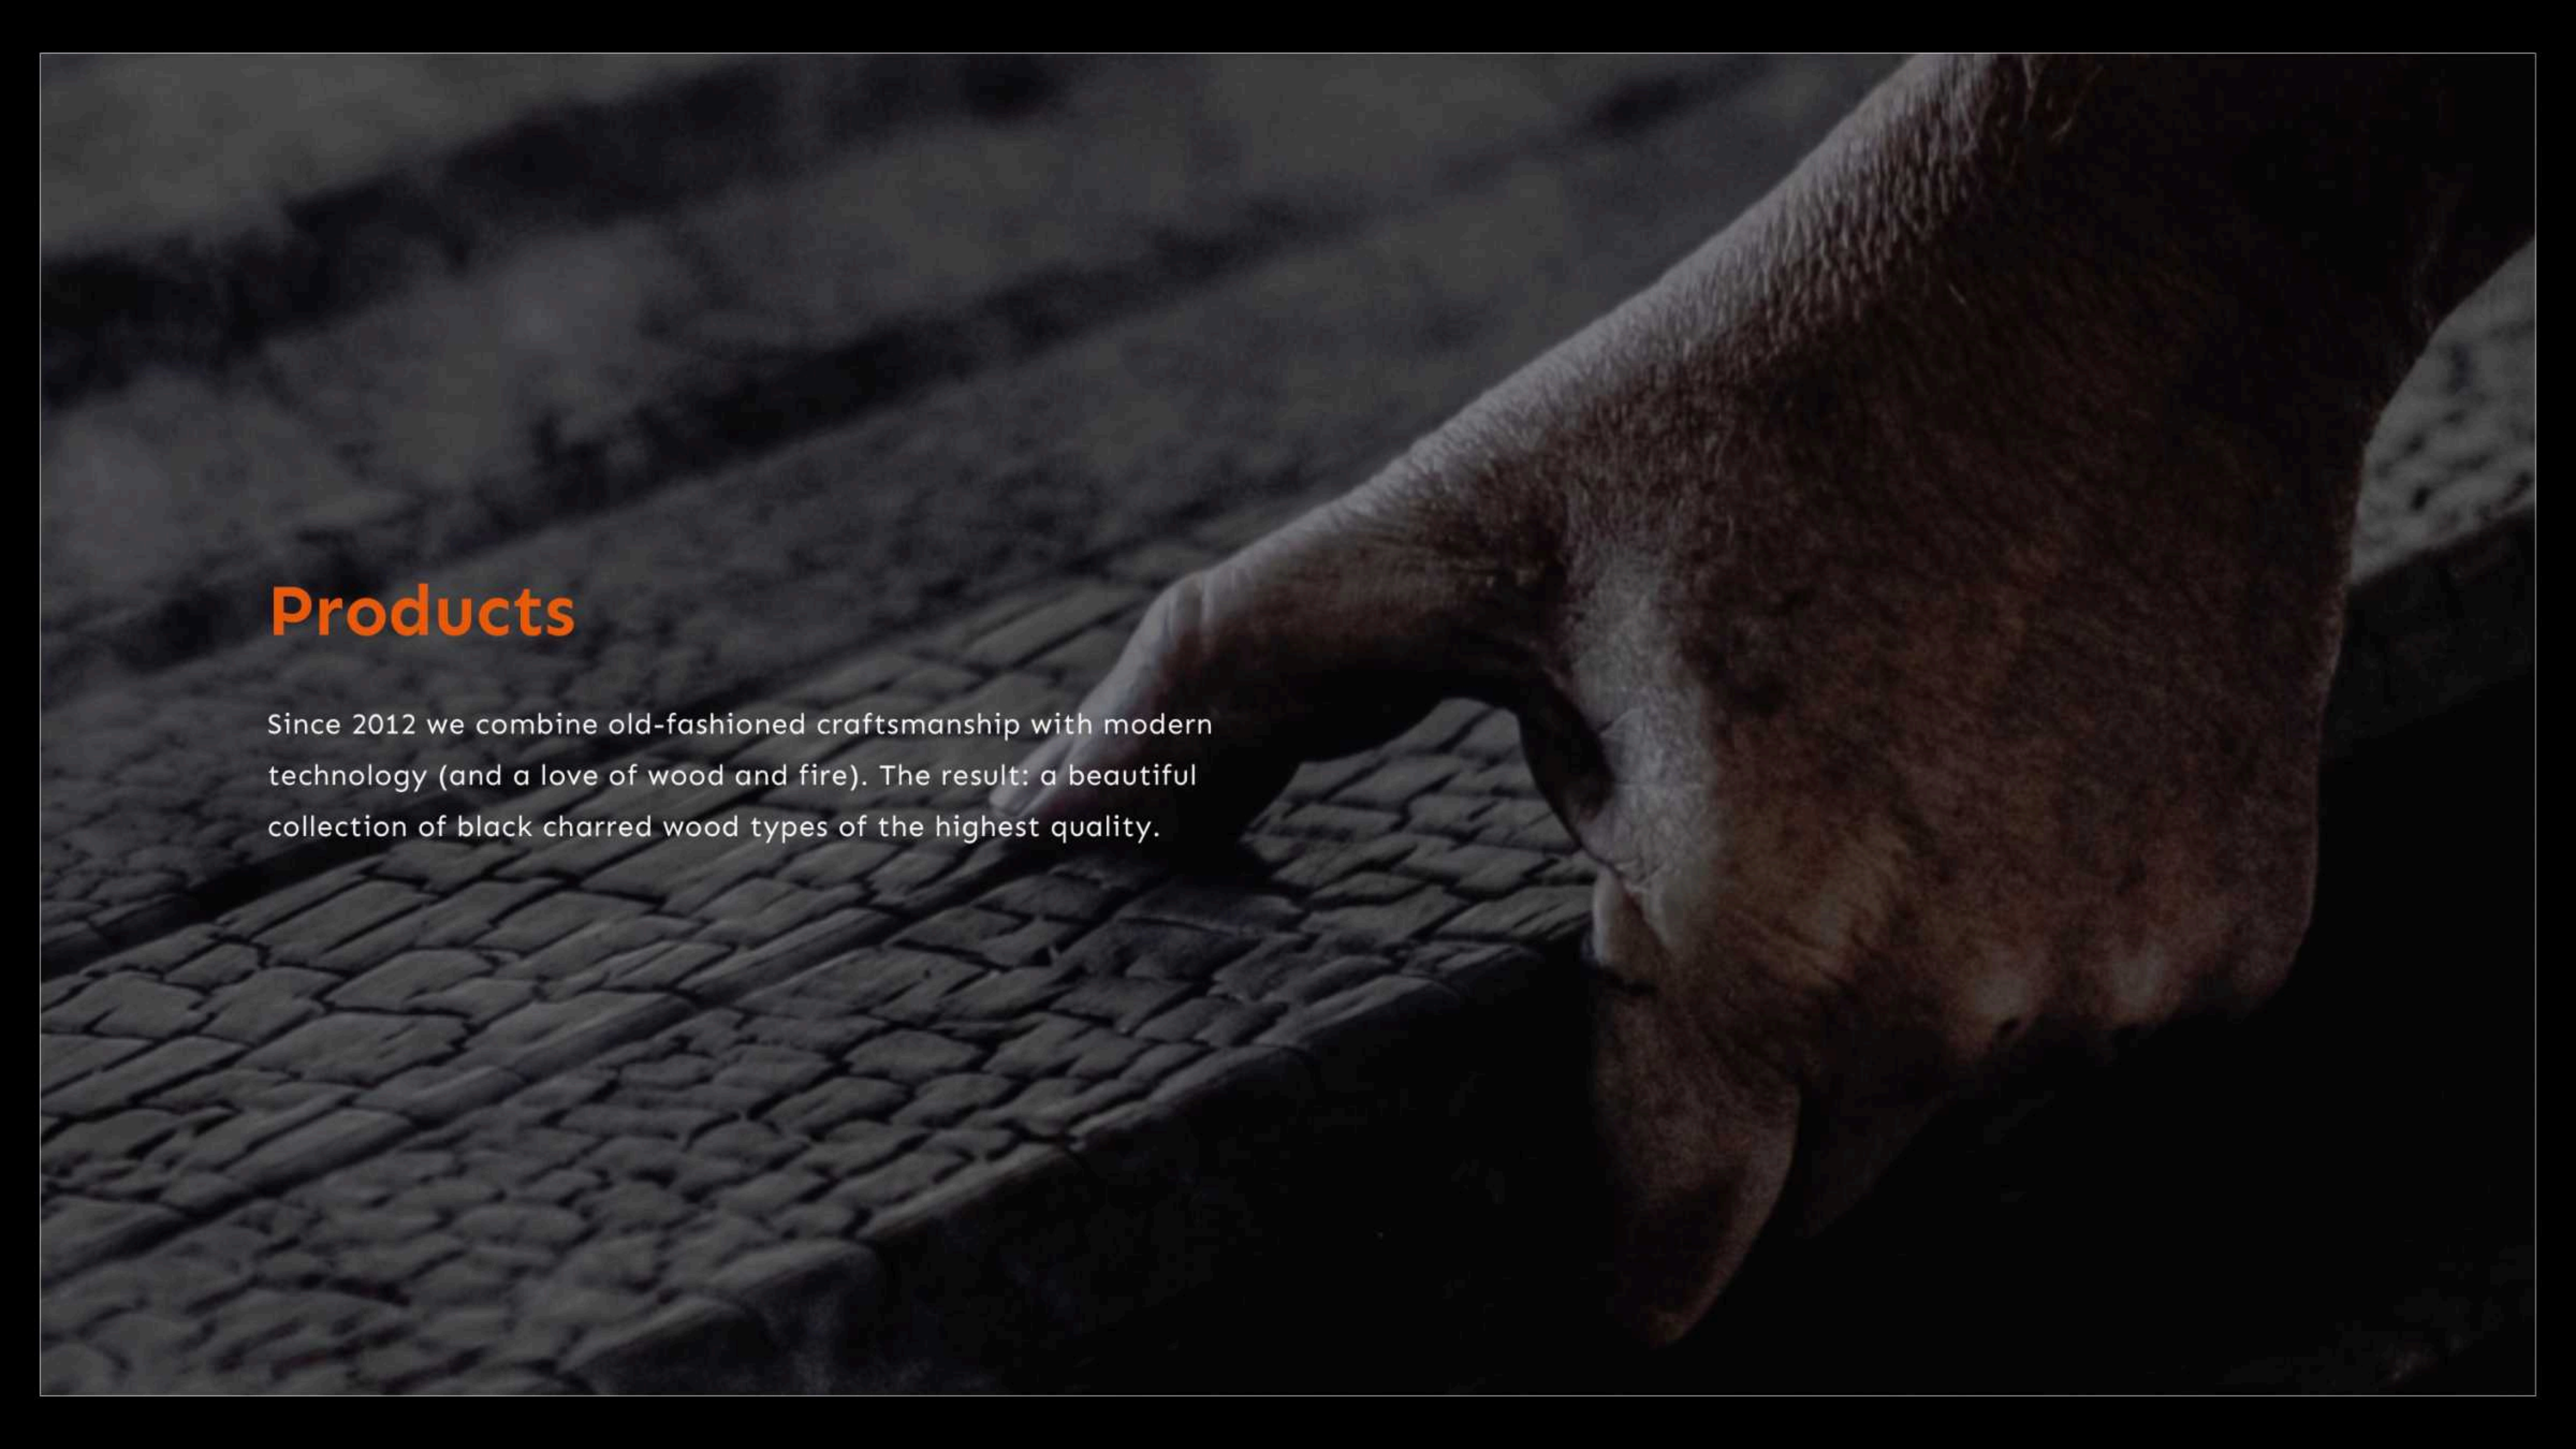A close-up photograph of a person's hand with light skin touching a piece of dark, charred wood. The wood has a deeply textured, cracked surface. The background is dark and out of focus.

Products

Since 2012 we combine old-fashioned craftsmanship with modern technology (and a love of wood and fire). The result: a beautiful collection of black charred wood types of the highest quality.



漆黒,内外装用焼き杉板, - オスモカラー塗装無垢フローリング、オスモホルツ&カラー、DEESAWATモザイクフローリングの事なら【アルブルインク】京都・滋賀

アルブルインクおすすめの無垢建材の販売ページです。アルブルインクでは他にも様々な種類の商品を取り扱いしております。

 BrothierSébastien
959 位粉丝

关注




RIO GRANDE (FRENCH CHESTNUT)




NOROSHI



KATANA

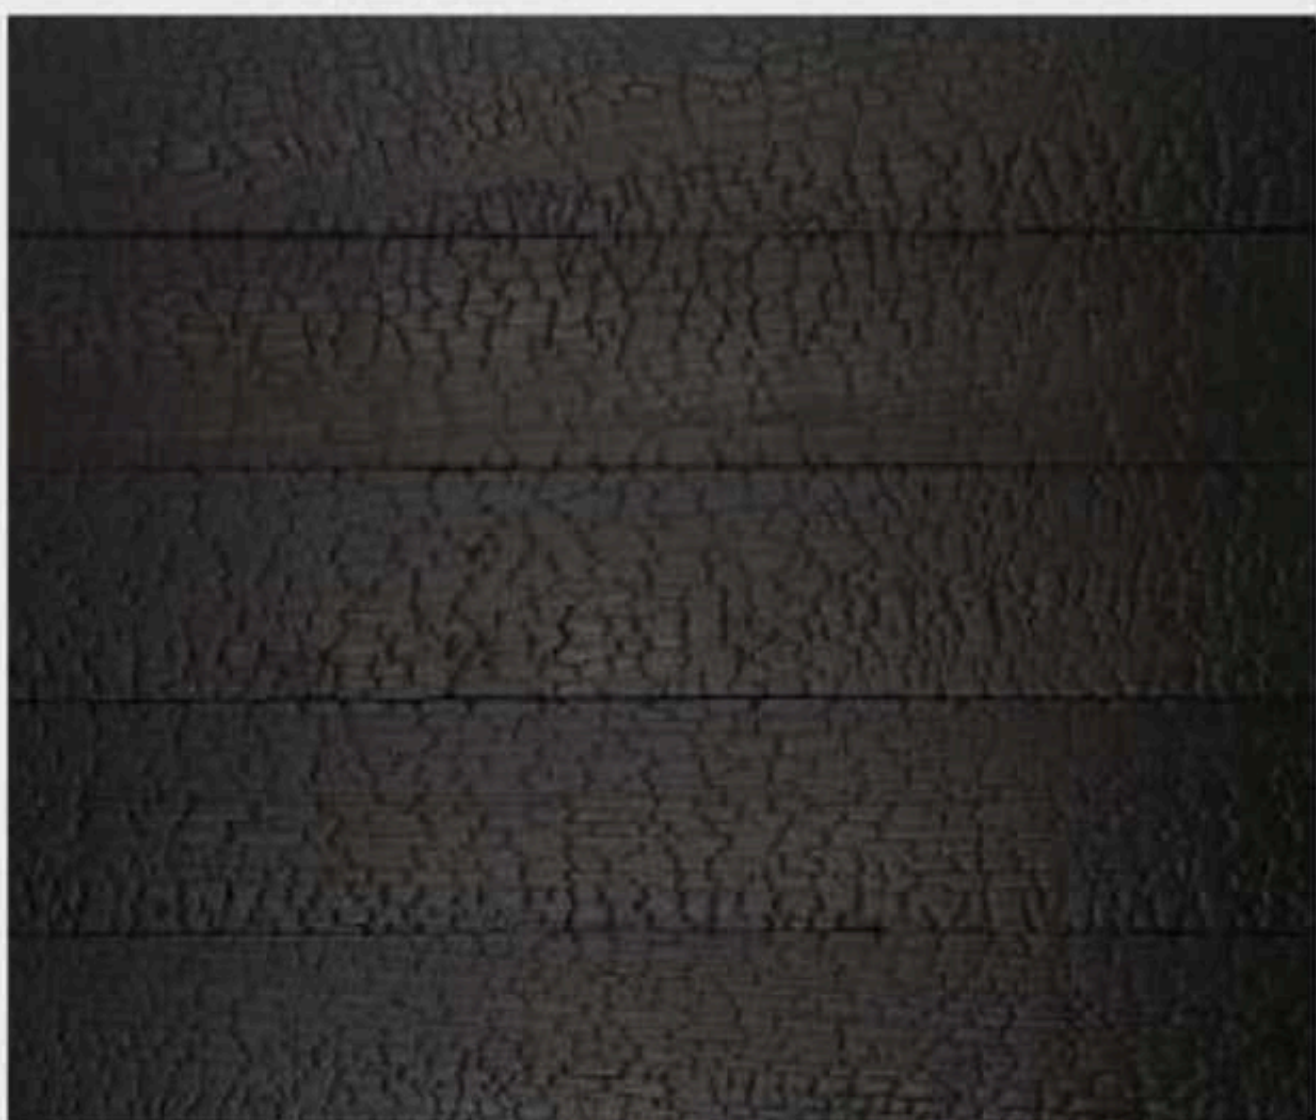

GATOR (CYPRESS)

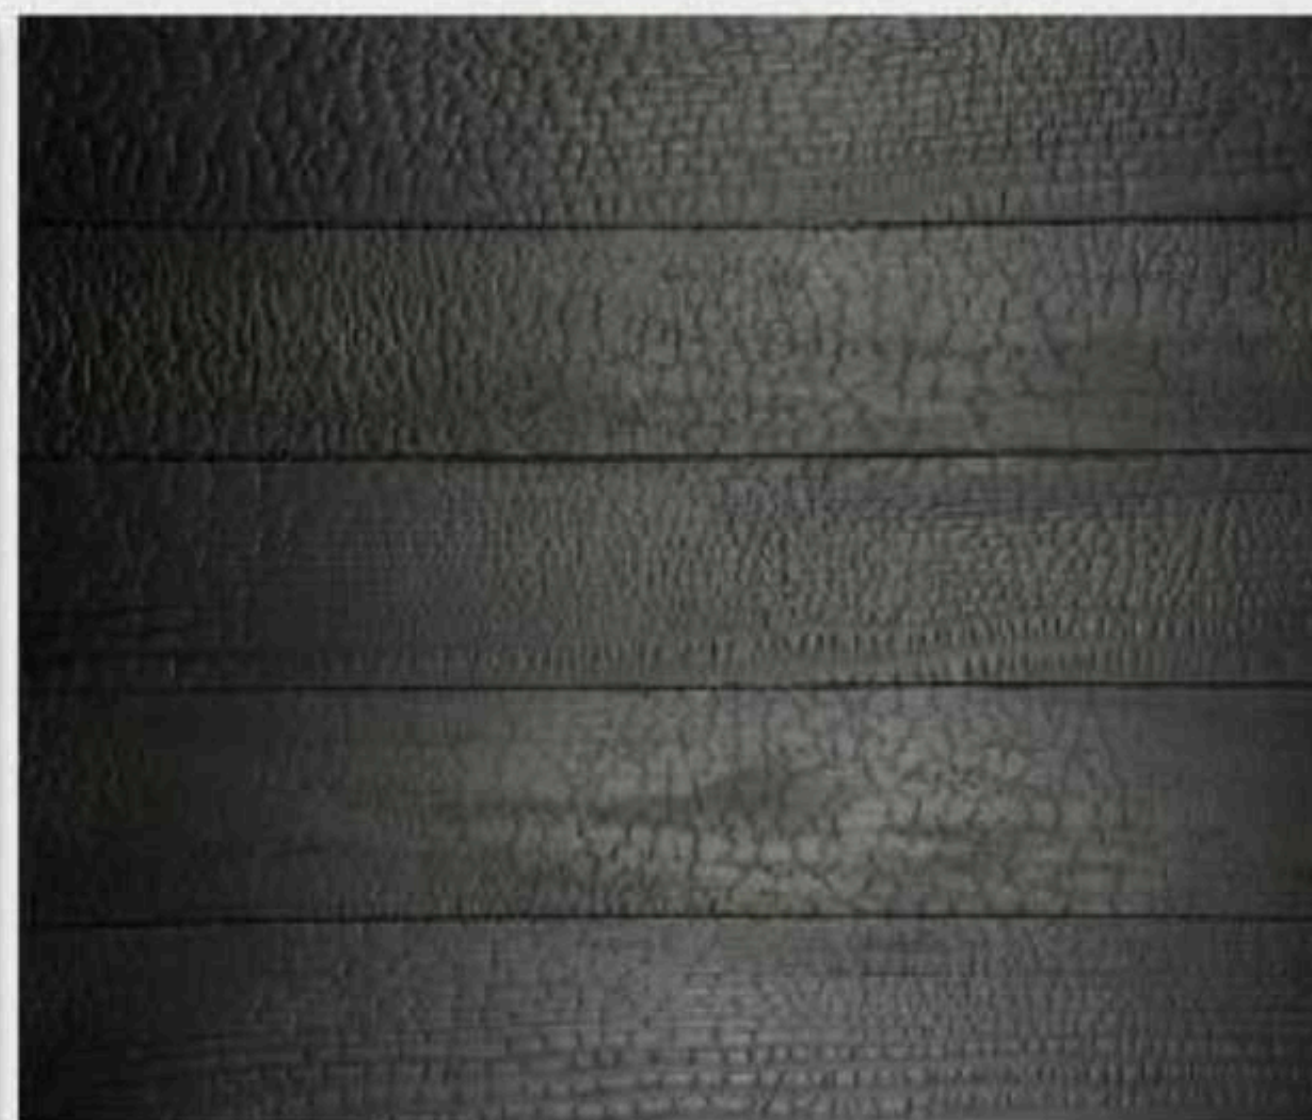

GATOR (DOUGLAS FIR)



TEXAS BARNWOOD (KATANA)



TEXAS BARNWOOD BLACK



KATANA SHINGLES



1/2 GATOR (CYPRESS)




1/2 GATOR (DOUGLAS FIR)



B&B TEAK (DOUGLAS FIR)




B&B EBONY (DOUGLAS FIR VG)

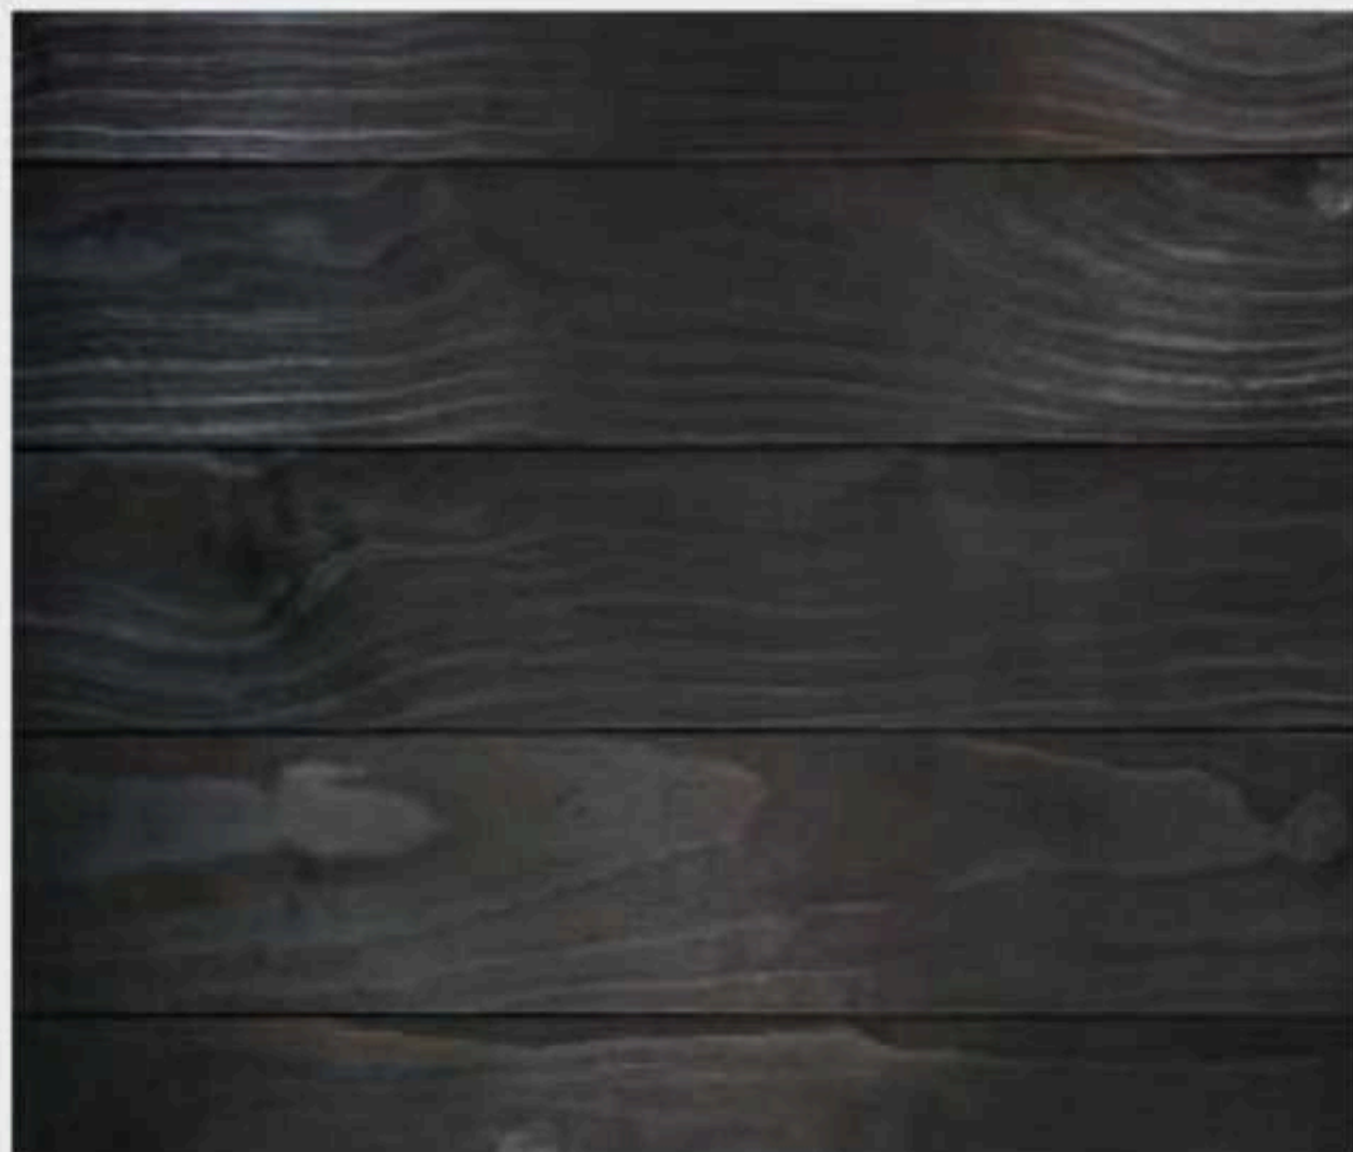

B&B (KATANA)



B&B NATURAL (REDWOOD)

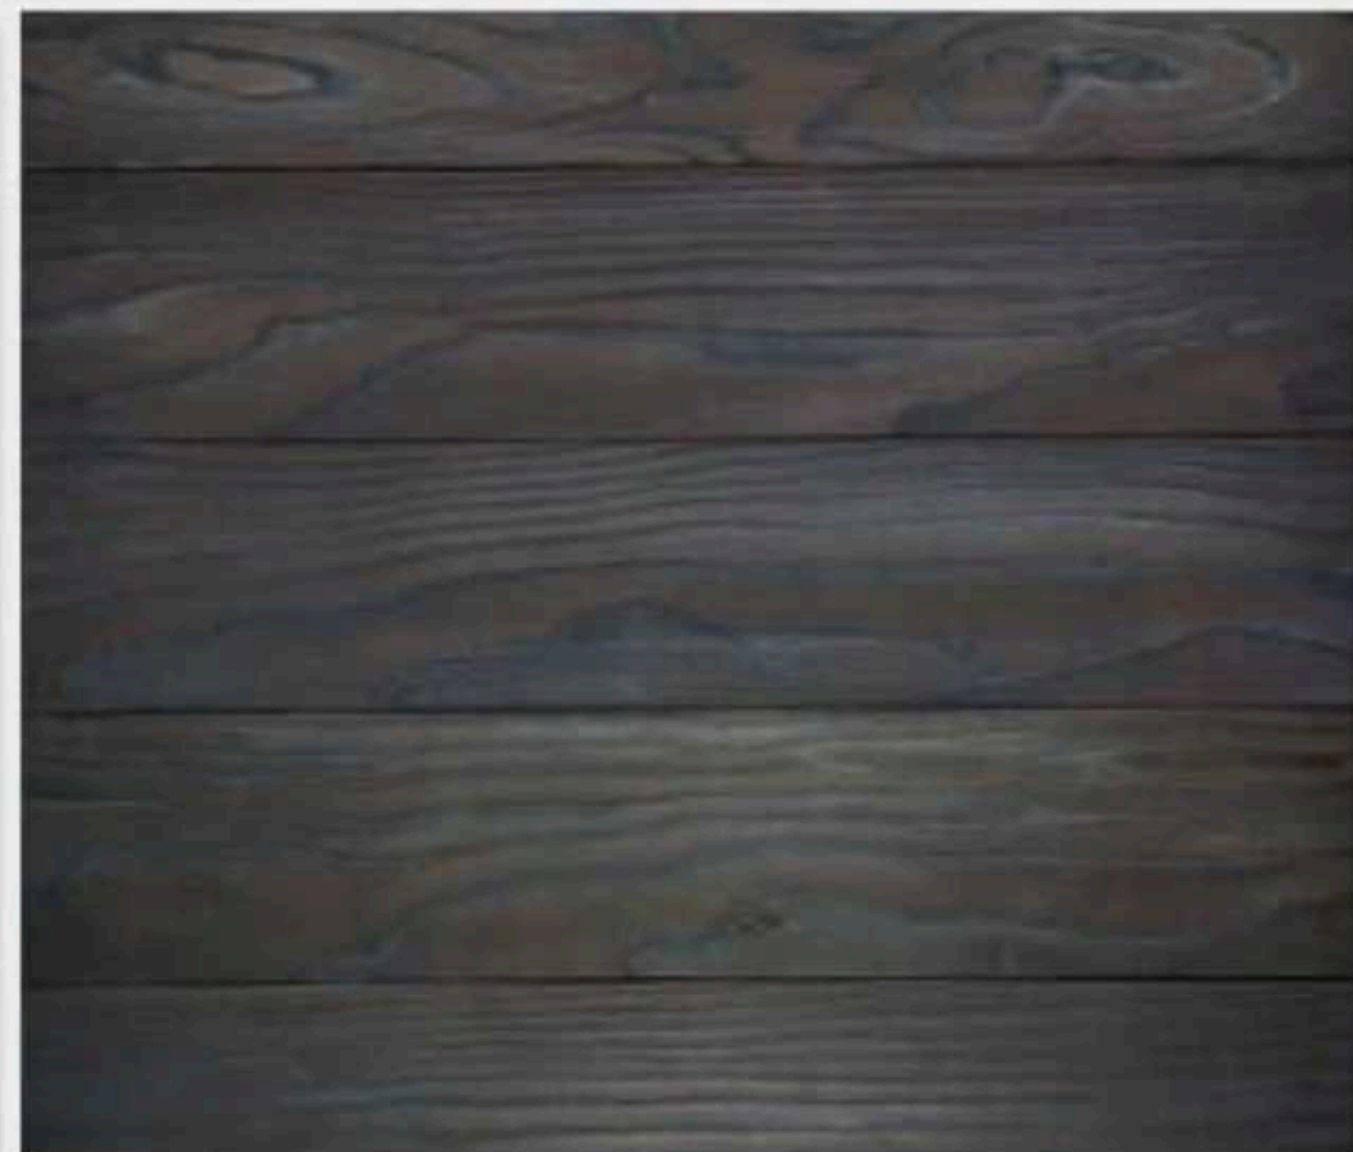

B&B (CYPRESS)



TIGER TAUPE (CYPRESS)



TIGER NATURAL (CYPRESS)




TIGER NAVAJO RED (CYPRESS)



NOROSHI HALF-GATOR



GOLIAD (EURO WHITE OAK)

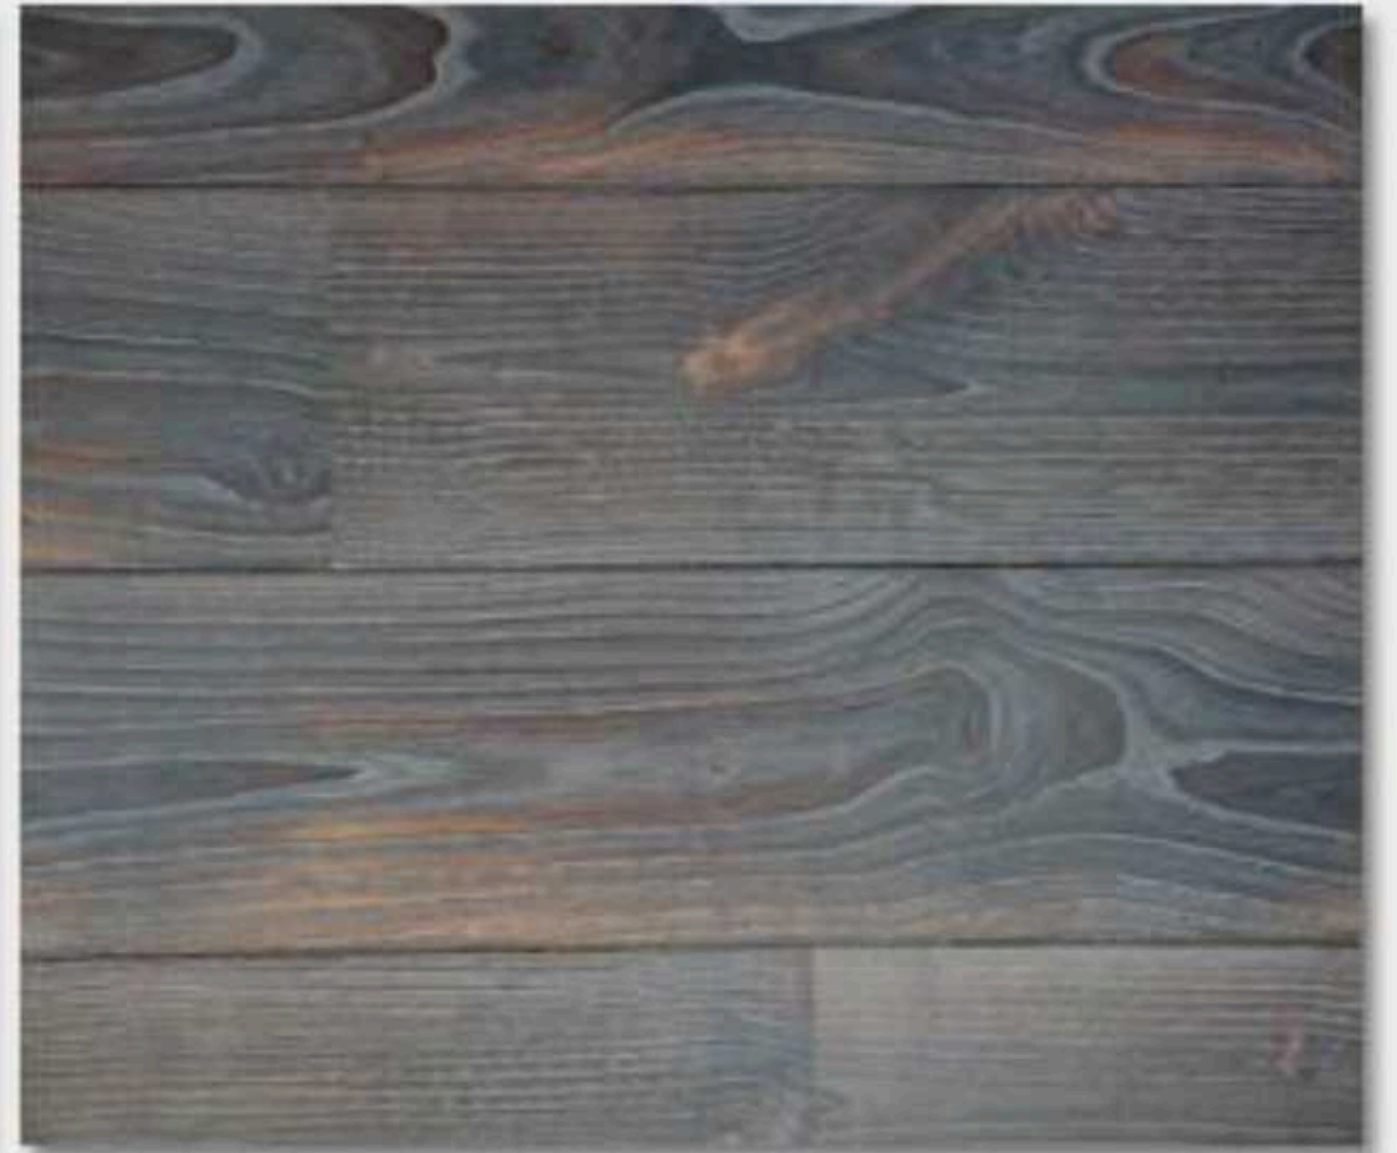

NAVASOTA (FRENCH CHESTNUT)



LAVACA (FRENCH CHESTNUT)




BLANCO (EURO WHITE OAK)



BRAZOS (FRENCH CHESTNUT)




TIGER BLUE GRANITE (CYPRESS)

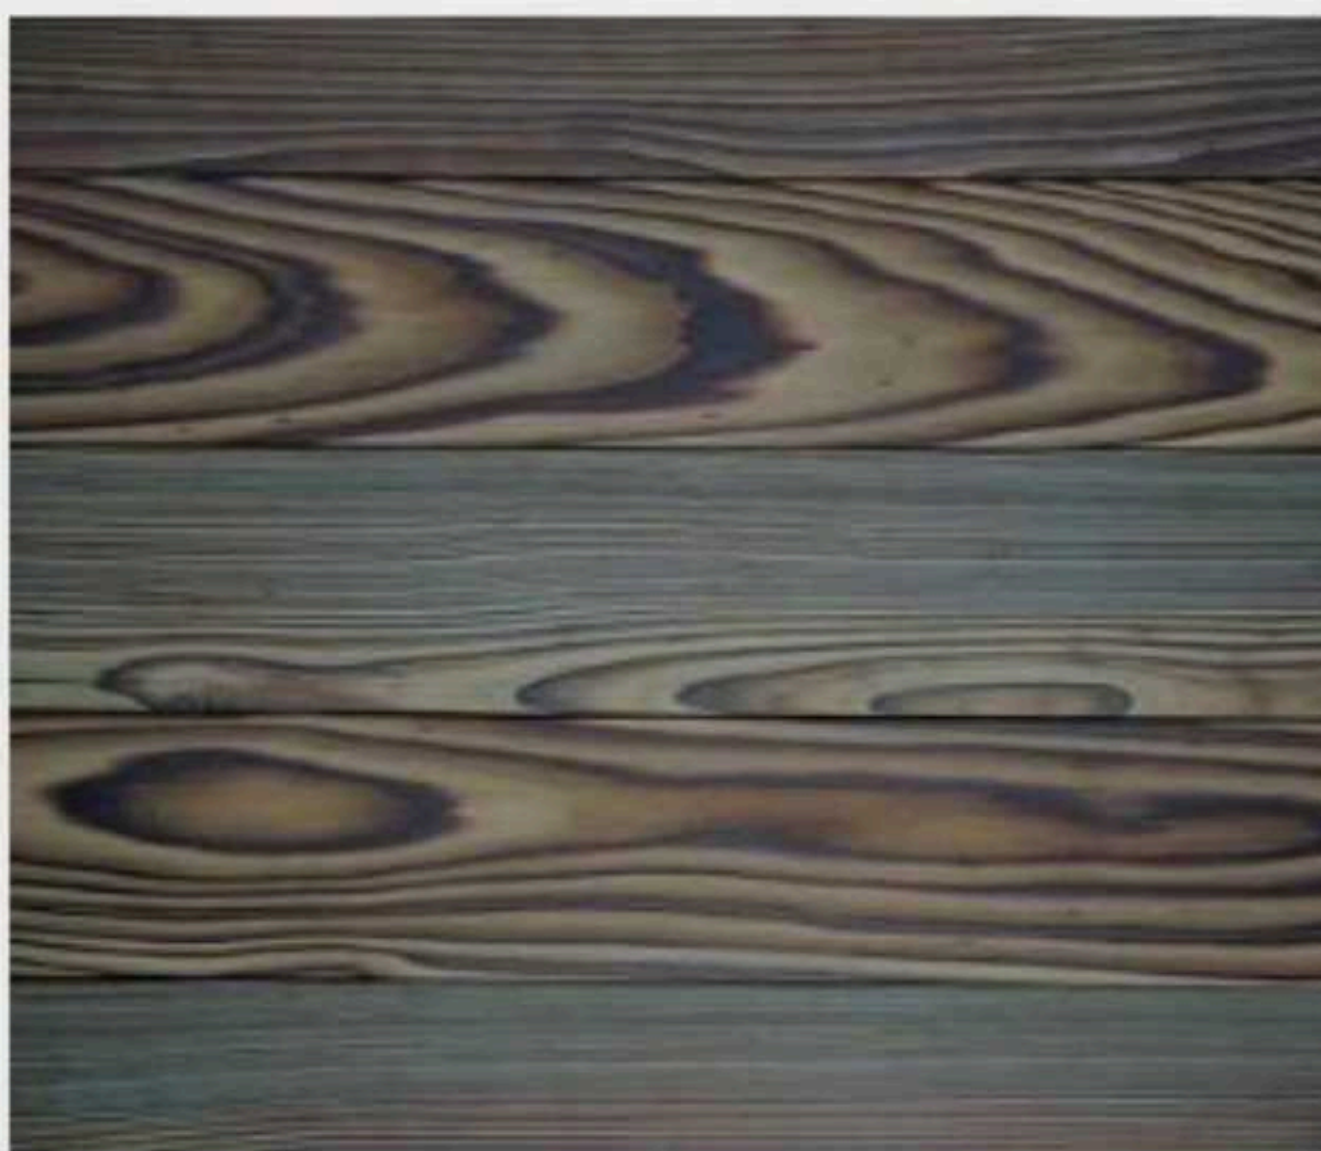


SMOOTH WOODLAND GREEN (CYPRESS)



SMOOTH NAVAJO WHITE (CYPRESS)

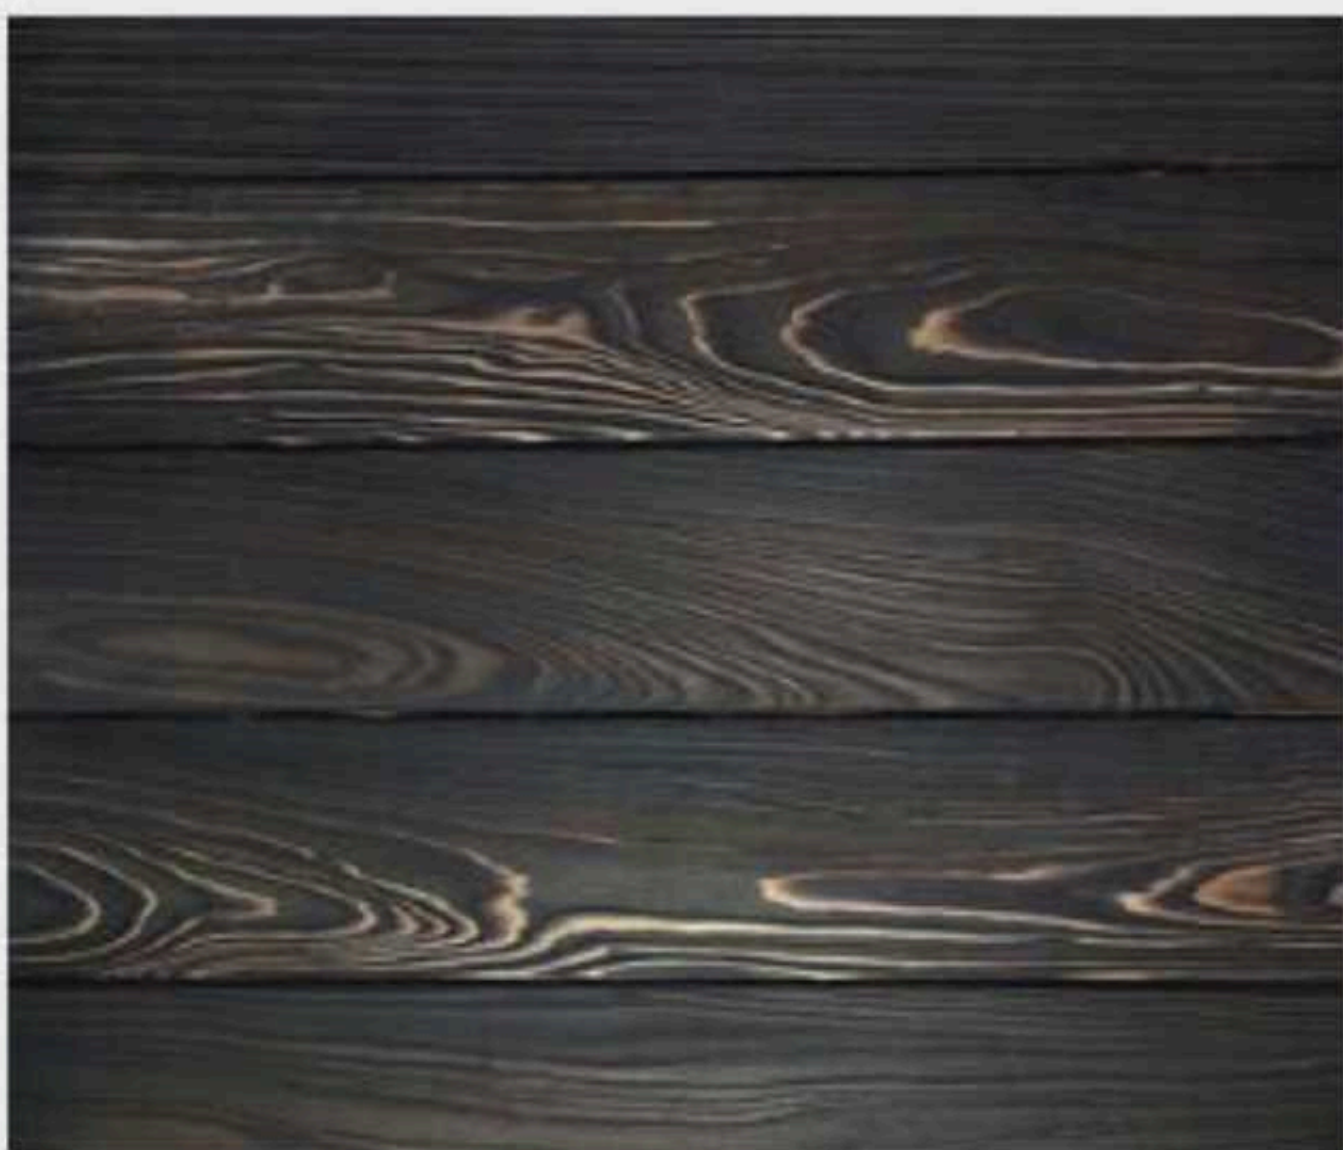


SMOOTH EBONY (CYPRESS)

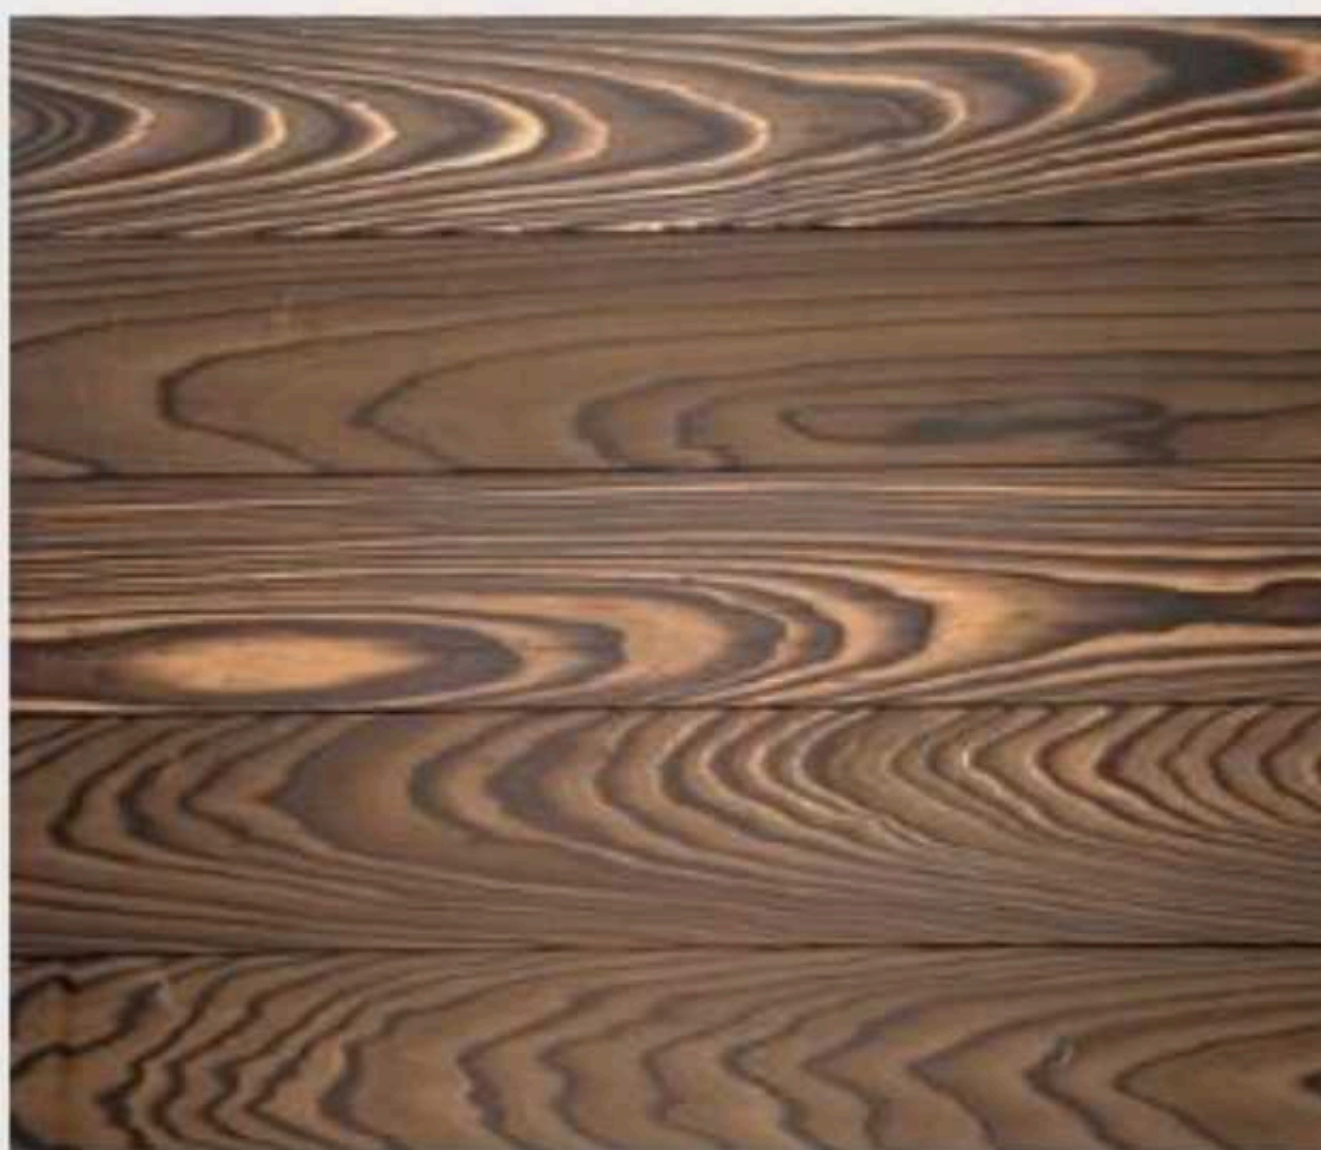


SMOOTH HICKORY (CYPRESS)



SMOOTH GETTYSBURG (CYPRESS)

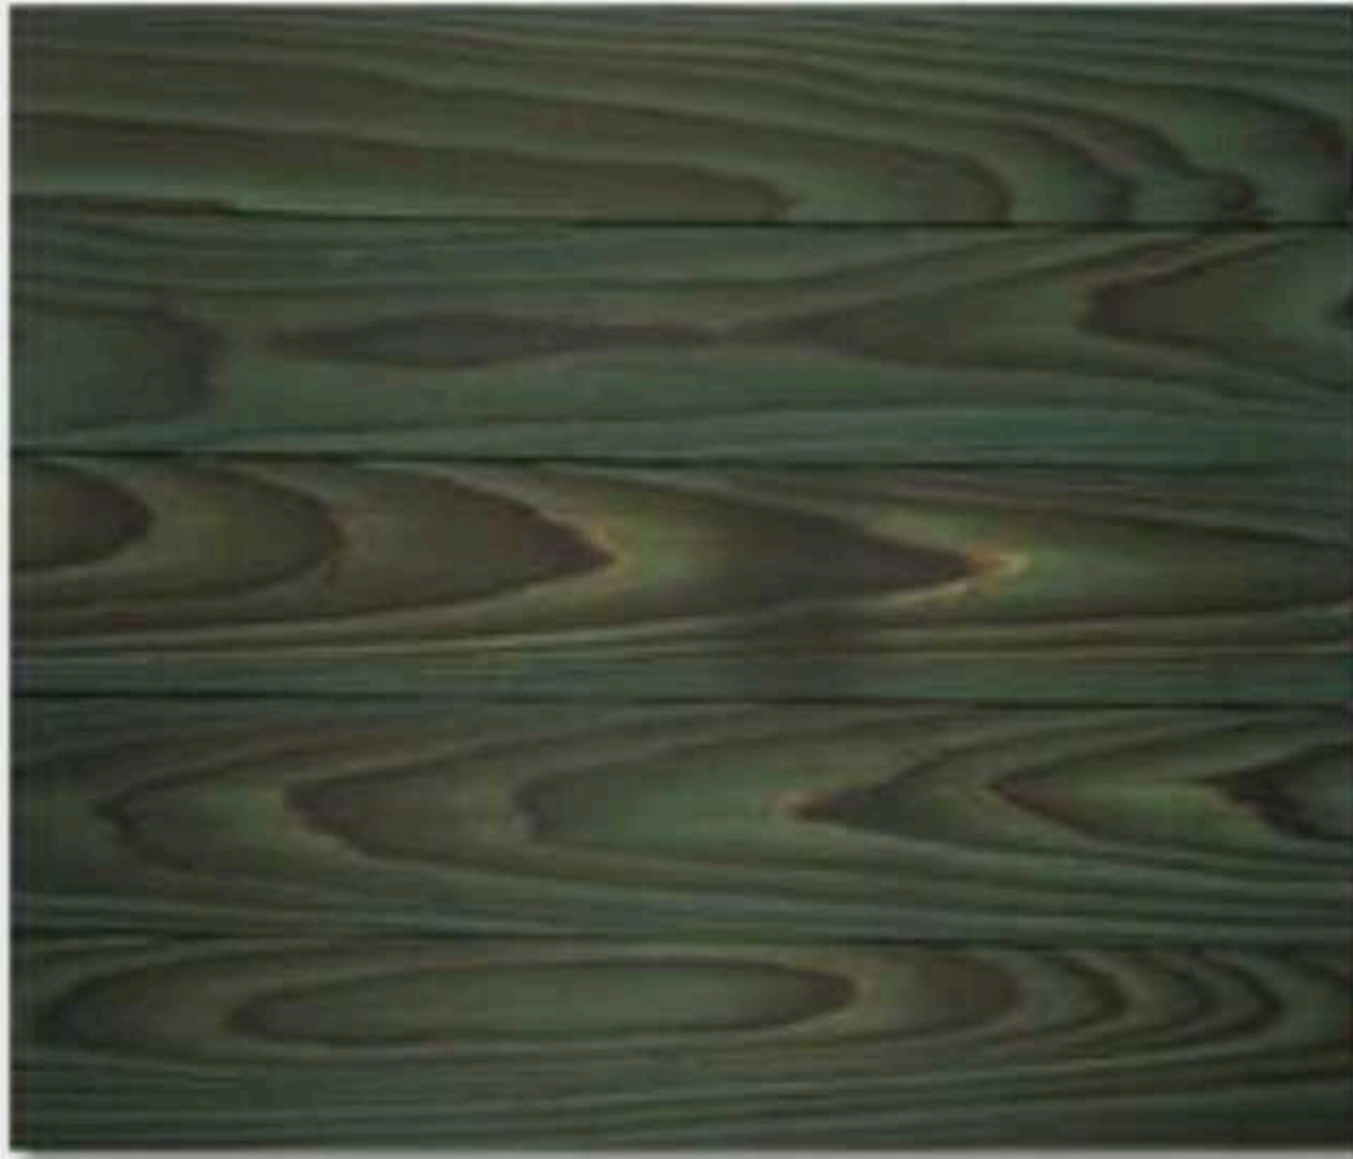

SMOOTH SPRUCE (CYPRESS)

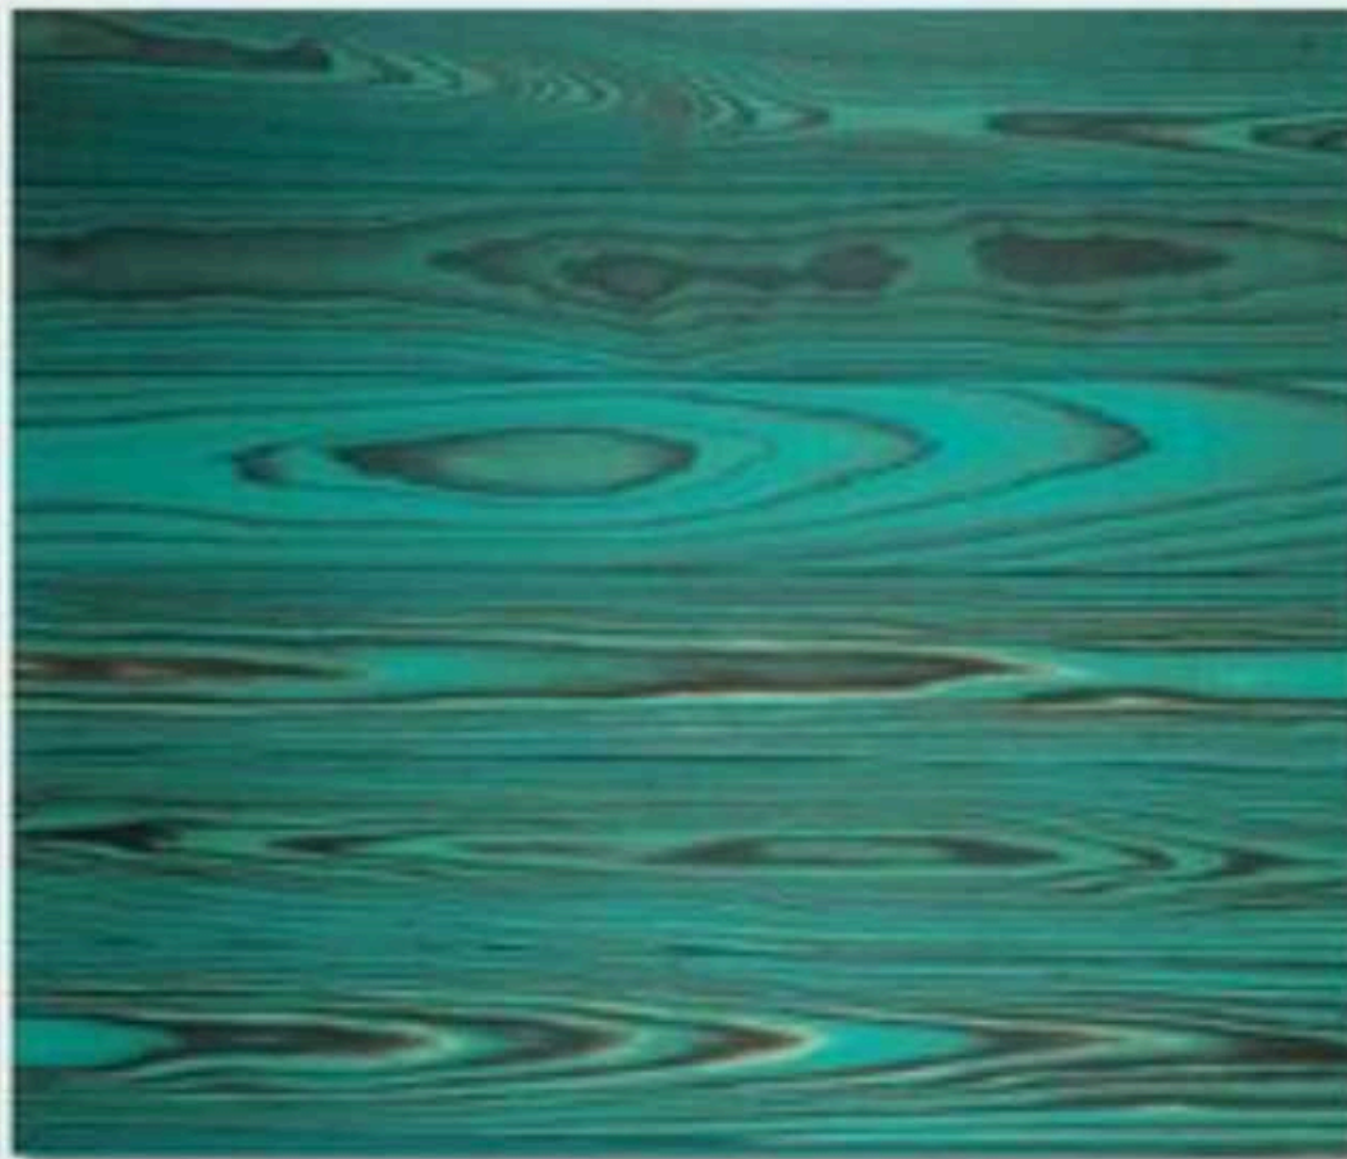

SMOOTH TEAL (CYPRESS)




SMOOTH MOUNTAIN GRAY (CYPRESS)



SMOOTH TERRA COTTA (CYPRESS)



SMOOTH NATURAL (CYPRESS)

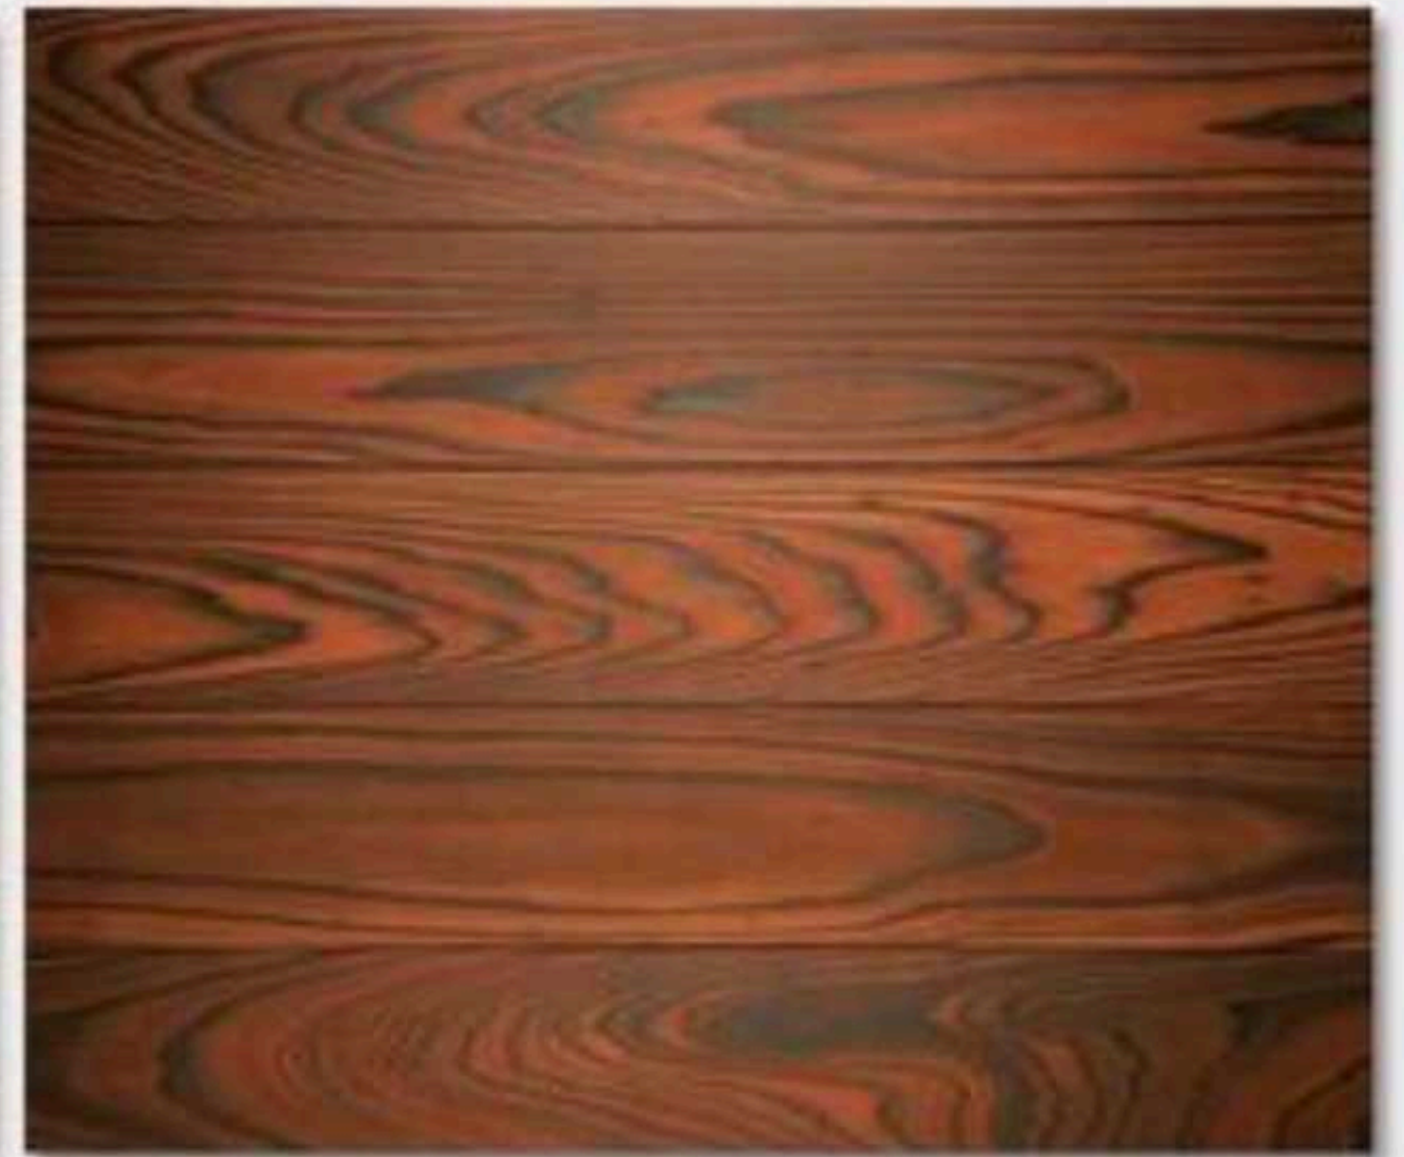

SMOOTH NAVAJO RED (CYPRESS)



SMOOTH EBONY (YELLOW PINE)



EG TIGER SMOOTH NATURAL (YELLOW PINE)



SMOOTH TOBACCO (YELLOW PINE)



SMOOTH BLUE MIST (YELLOW PINE)



SMOOTH NAVAJO WHITE (REDWOOD)



WIDE PLANK TIGER SMOOTH (YELLOW PINE)



SMOOTH ASPEN (REDWOOD)



SMOOTH MT GRAY (DOUGLAS FIR)



SMOOTH NATURAL (REDWOOD)



SMOOTH ALMOND (DOUGLAS FIR)




HEWN SMOOTH TEAK (CYPRESS)



HEWN SMOOTH RED (CYPRESS)




ARDMORE: THERMALLY MODIFIED RED OAK SHOU SUGI BAN
Sylva

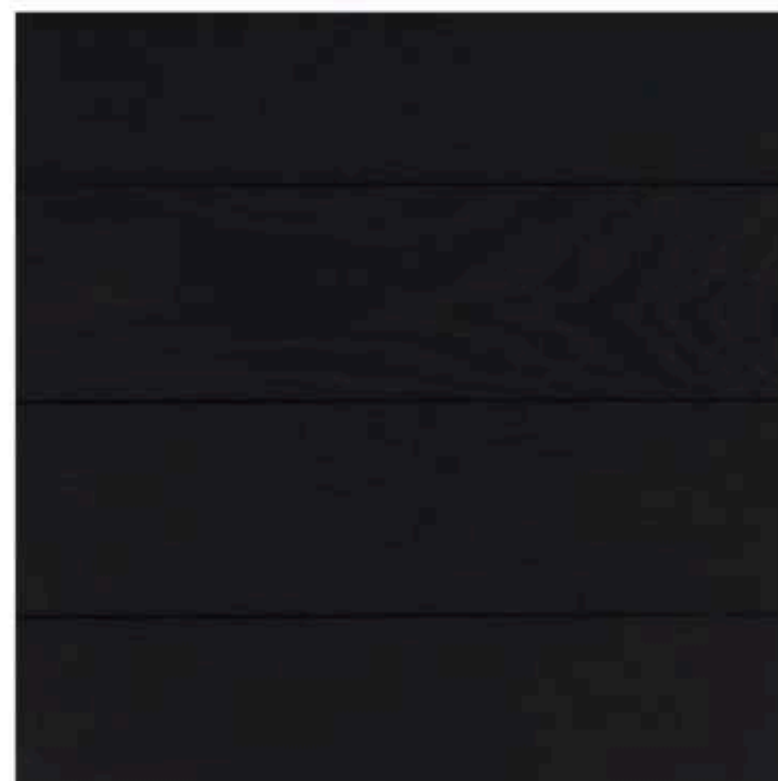

SOLEBURY: THERMALLY MODIFIED RED OAK SHOU SUGI BAN
Sylva



MONROE: THERMALLY MODIFIED RED OAK SHOU SUGI BAN
Sylva

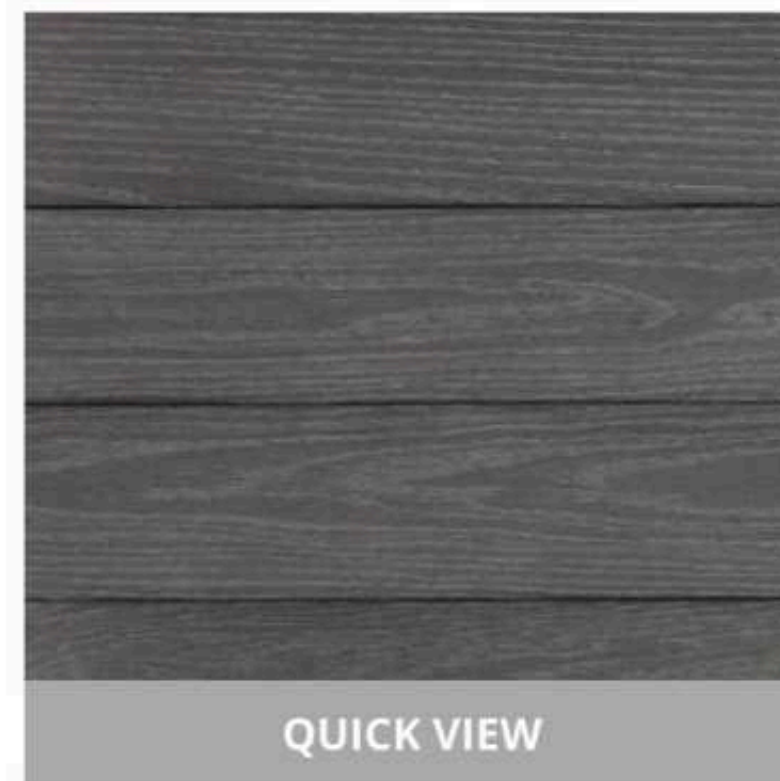

DOYLE: THERMALLY MODIFIED RED OAK SHOU SUGI BAN
Sylva



MERION: THERMALLY MODIFIED RED OAK SHOU SUGI BAN
Sylva

SYLVA THERMALLY MODIFIED NORTH AMERICAN RED OAK

SylvaTM features wood cladding that is sourced from abundant and sustainably grown U.S. forests. Currently, our offering consists of Thermally Modified North American Red Oak products that are locally sourced and manufactured in Pennsylvania. They are stable, weather-resistant, FSC®-Certified, and comply with Wildland Urban Interface (WUI) requirements, ensuring their longevity.

reSAWN TIMBER co.™

The Value of a Natural Product is Without Equal.™



HAMERS: THERMALLY MODIFIED RED
OAK
Sylva



MICHAUX: THERMALLY MODIFIED RED
OAK
Sylva




PINCHOT: THERMALLY MODIFIED RED
OAK
Sylva



ROTHROCK: THERMALLY MODIFIED
RED OAK
Sylva




SINNEN: THERMALLY MODIFIED RED
OAK
Sylva

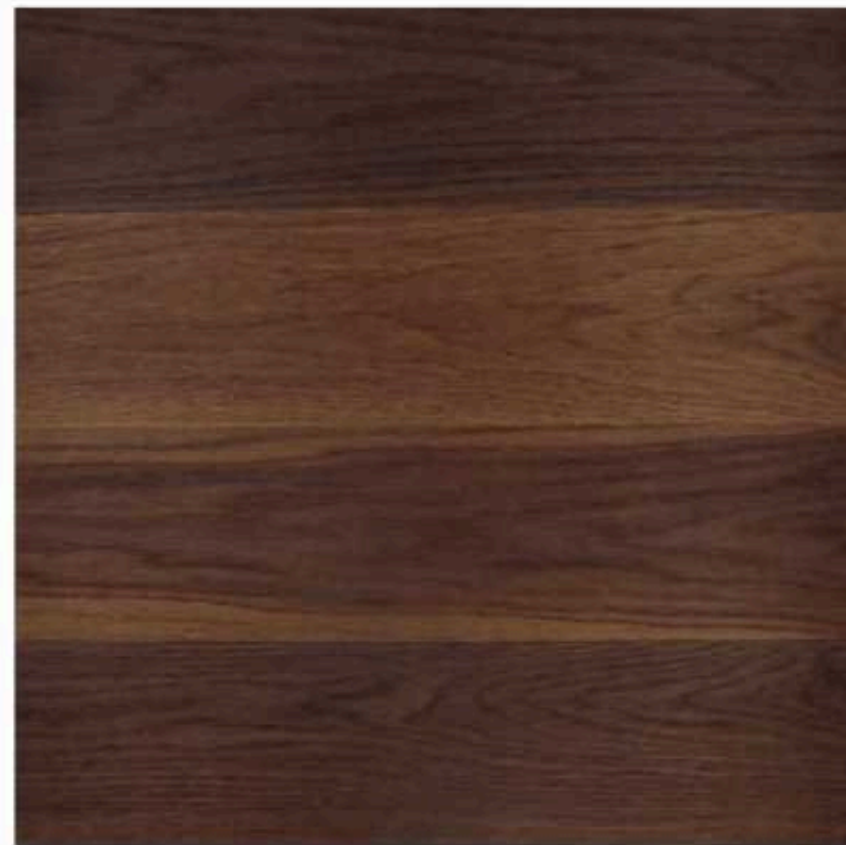

SPROUL: THERMALLY MODIFIED RED
OAK
Sylva



TIA: THERMALLY MODIFIED RED OAK
Sylva

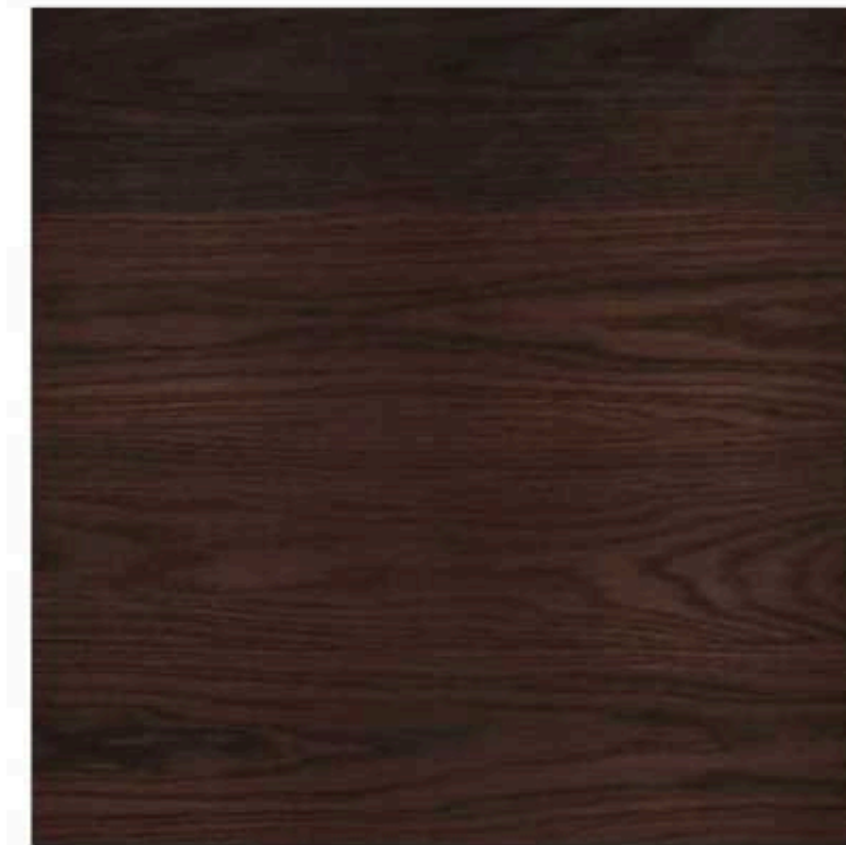

TUSCA: THERMALLY MODIFIED RED
OAK
Sylva

CHARRED



ARDMORE: THERMALLY MODIFIED RED OAK SHOU SUGI BAN
Sylva



DOYLE: THERMALLY MODIFIED RED OAK SHOU SUGI BAN
Sylva



MERION: THERMALLY MODIFIED RED OAK SHOU SUGI BAN
Sylva




MONROE: THERMALLY MODIFIED RED OAK SHOU SUGI BAN
Sylva



SOLEBURY: THERMALLY MODIFIED RED OAK SHOU SUGI BAN
Sylva

NON-CHARRED

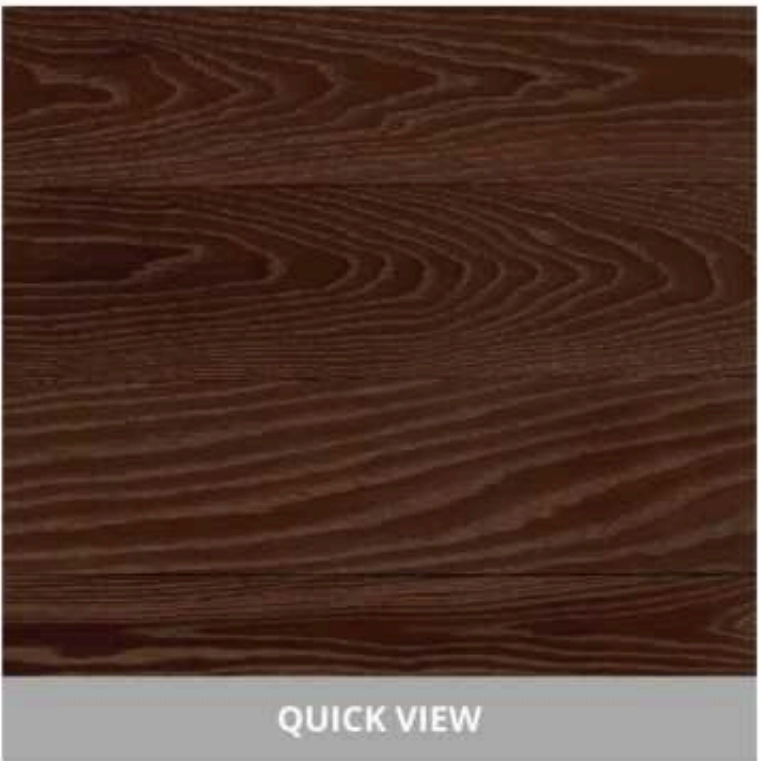


BEDFORD: THERMALLY MODIFIED RED OAK
Sylva



DEVON: THERMALLY MODIFIED RED OAK
Sylva



DUBLIN: THERMALLY MODIFIED RED OAK
Sylva

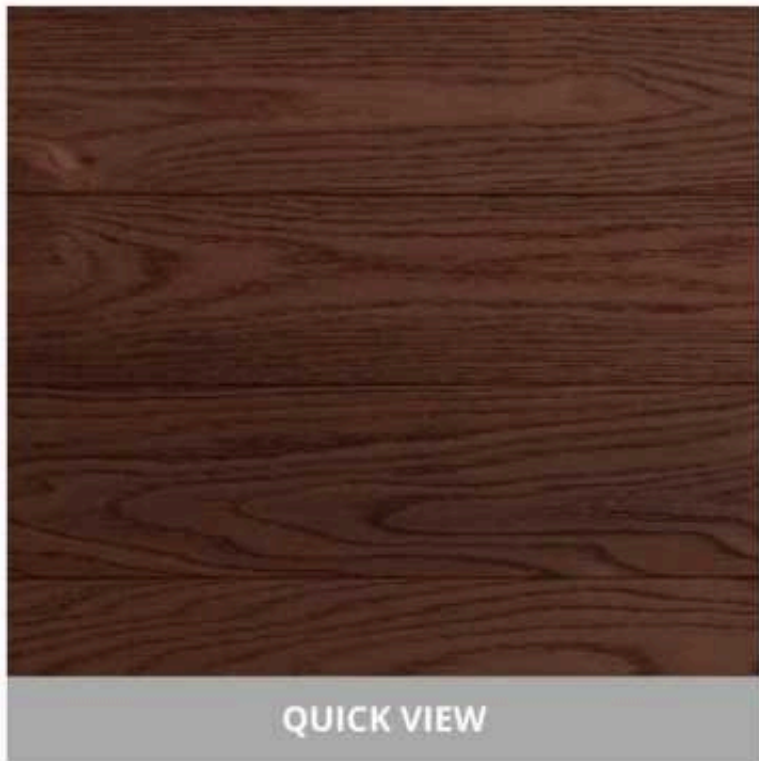

ELK: THERMALLY MODIFIED RED OAK
Sylva




GALENA: THERMALLY MODIFIED RED OAK
Sylva



MONDARA: THERMALLY MODIFIED RED OAK
Sylva



RADNOR: THERMALLY MODIFIED RED OAK
Red Oak

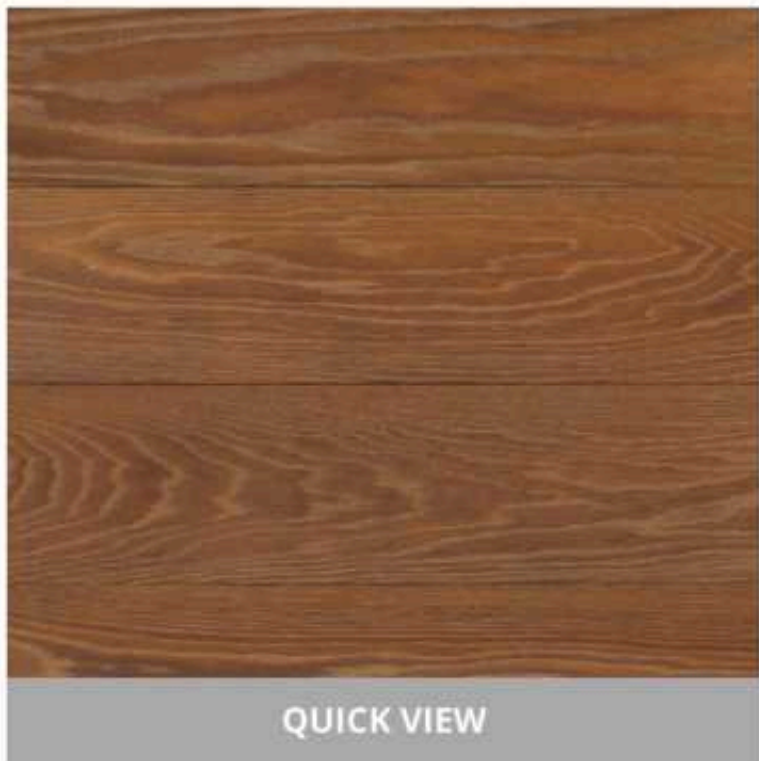

WAYNE: THERMALLY MODIFIED RED OAK
Sylva

SYLVA THERMALLY MODIFIED NORTH AMERICAN RED OAK

reSAWN TIMBER co. is proud to introduce **Sylva**TM thermally modified wood cladding. Sylva features wood cladding that is sourced from abundant and sustainably grown U.S. forests. Currently, our offering consists of Thermally Modified North American Red Oak products that are locally sourced and manufactured in Pennsylvania. They are stable, weather-resistant, FSC®-Certified, and comply with Wildland Urban Interface (WUI) requirements, ensuring their longevity.

North American Red Oak is the most abundant hardwood in the eastern and central regions of the United States and southern Canada. The species thrives in cold, wet winters and hot, humid summers, making it extremely adaptable to various climates. Red Oaks are fast-growing, sprouting up to 24 inches per year and reaching a mature height of 60 to 90 feet. They flourish in sunlight and require a gap in the canopy to mature. Red Oak features a uniform heartwood color and tight growth rings.

Thermally modified wood is made by heating hardwood up to 400 degrees Fahrenheit and followed by a steaming process to recondition the wood. The modification changes the wood's molecular structure, making it highly durable and resistant to water damage.

ABOUT WESTERN HEMLOCK – CLEAR VERTICAL GRAIN

Western Hemlock is typically found on the Pacific North West coast of North America and is one of the most valuable sources of lumber in the northern hemisphere and is the largest of the hemlock species. Specimens range from 90 to 150 feet tall and 3 to 4.5 feet wide, though some specimens have been known to grow to heights of 250 feet and diameters approaching 9 feet. The wood is usually odorless when dry and free of resin.

The heartwood and sapwood of western hemlock are almost white with a purplish tinge. Dark streaks are often found in the lumber; these are caused by hemlock bark maggots and generally do not reduce strength. Western Hemlock is moderately light in weight and moderate in strength. It is moderate in its hardness, stiffness, and shock resistance. The wood is intermediate in nail holding ability and has a tendency to split when nailed. It grows along the Pacific coast of Oregon and Washington and in the northern Rocky Mountains north to Canada and Alaska. Occasionally it will contain a sound and small, black pin knot and dark bark streaks. Clear vertical grain lumber milled from hemlock is fine textured, straight-grained, free of pitch and it splinters less than other softwoods. These characteristics make it an excellent wood for molding, millwork and a large variety of interior paneling products.



SNOHOMISH: VERTICAL GRAIN WEST-ERN HEMLOCK
Western Hemlock



KITTITAS: CHARRED VERTICAL GRAIN WESTERN HEMLOCK
Western Hemlock



MASON: VERTICAL GRAIN WESTERN HEMLOCK
Western Hemlock



LEWIS: VERTICAL GRAIN WESTERN HEMLOCK
Western Hemlock



BENTON 2.0: VERTICAL GRAIN WEST-ERN HEMLOCK
Western Hemlock



GRAYS HARBOR: VERTICAL GRAIN WESTERN HEMLOCK
Western Hemlock



IKIGAI: ACCOYA SHOU SUGI BAN
Accoya



MATSU: ACCOYA SHOU SUGI BAN
Accoya



NIGIRI: ACCOYA SHOU SUGI BAN
Accoya



SAMITTO: ACCOYA SHOU SUGI BAN
Accoya



KALĀ: ACCOYA SHOU SUGI BAN
Accoya



UNAGI 2.0: ACCOYA SHOU SUGI BAN
Accoya

ACCOYA

Accoya® wood is the result of decades of research and development that has brought together a long-established, extensively proven wood modification technique and leading-edge patented technology – acetylation to create a high performance wood, ideal for outdoor use and challenging applications. By significantly enhancing the durability and dimensional stability of fast-growing and abundantly available certified wood species, Accoya® wood provides compelling environmental advantages over slow-growing hardwoods (which are often unsustainably sourced), woods treated with toxic preservative chemicals, and non-renewable carbon-intensive materials such as plastics, steel and concrete. All our CHARRED shou sugi ban Accoya® products are FSC certified and come with a 50-year warranty on the wood when used above ground; 25-year warranty when used at/below ground level.

reSAWN TIMBER co.™


The Value of a Natural Product is Without Equal.™




ALLETH: ACCOYA WOOD
Accoya



ARK: ACCOYA WOOD
Accoya

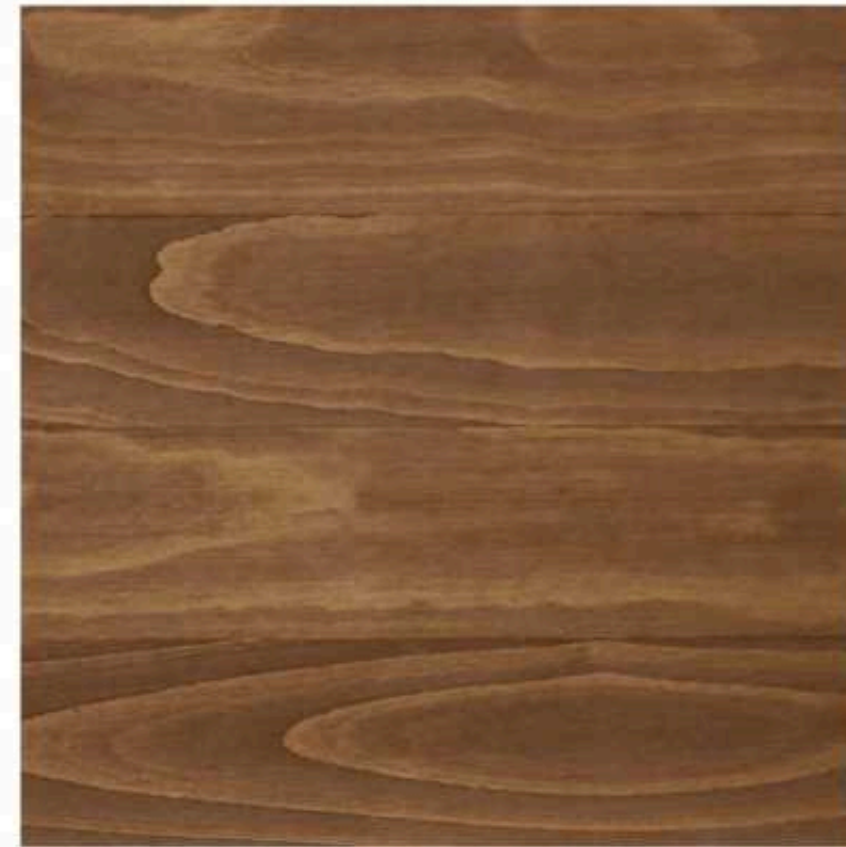

DENALI: ACCOYA WOOD
Accoya

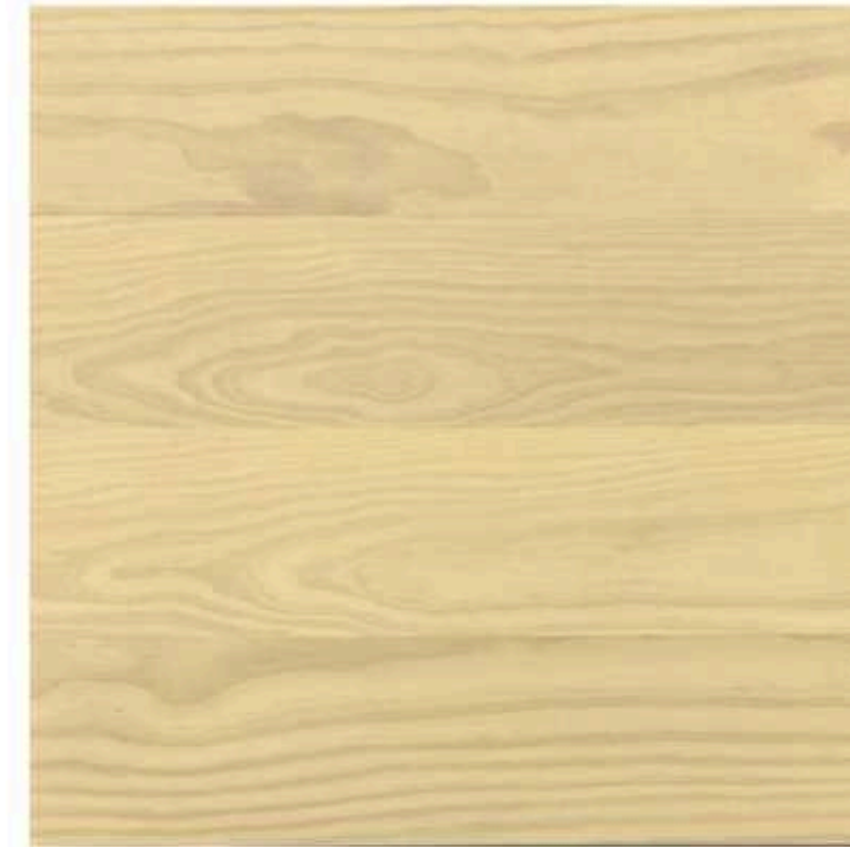

ELOW: ACCOYA WOOD
Accoya



EVERRA: ACCOYA WOOD
Accoya



GLACIE: ACCOYA WOOD
Accoya



KATMOR: ACCOYA WOOD
Accoya



MESADÉ: ACCOYA WOOD
Accoya

reSAWN TIMBER co.™

The Value of a Natural Product is Without Equal.™



OLYTH: ACCOYA WOOD
Accoya



REDYN: ACCOYA WOOD
Accoya




SEQOYA: ACCOYA WOOD
Accoya




SHENOR: ACCOYA WOOD
Accoya




VOYA: ACCOYA WOOD
Accoya

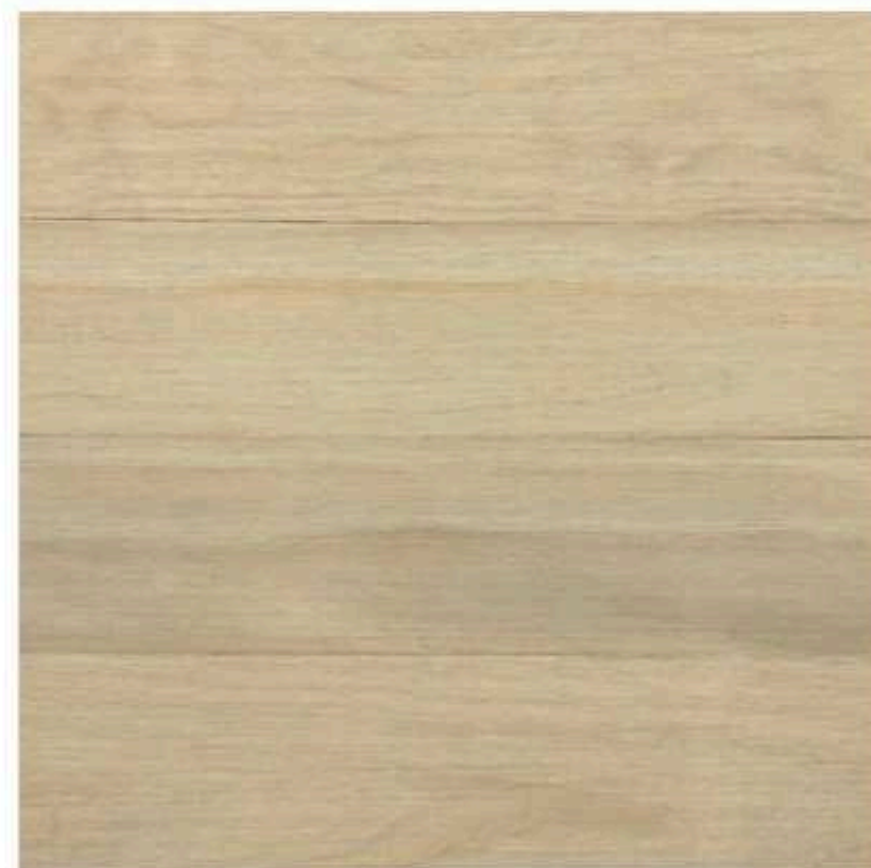

WHITNOR: ACCOYA WOOD
Accoya

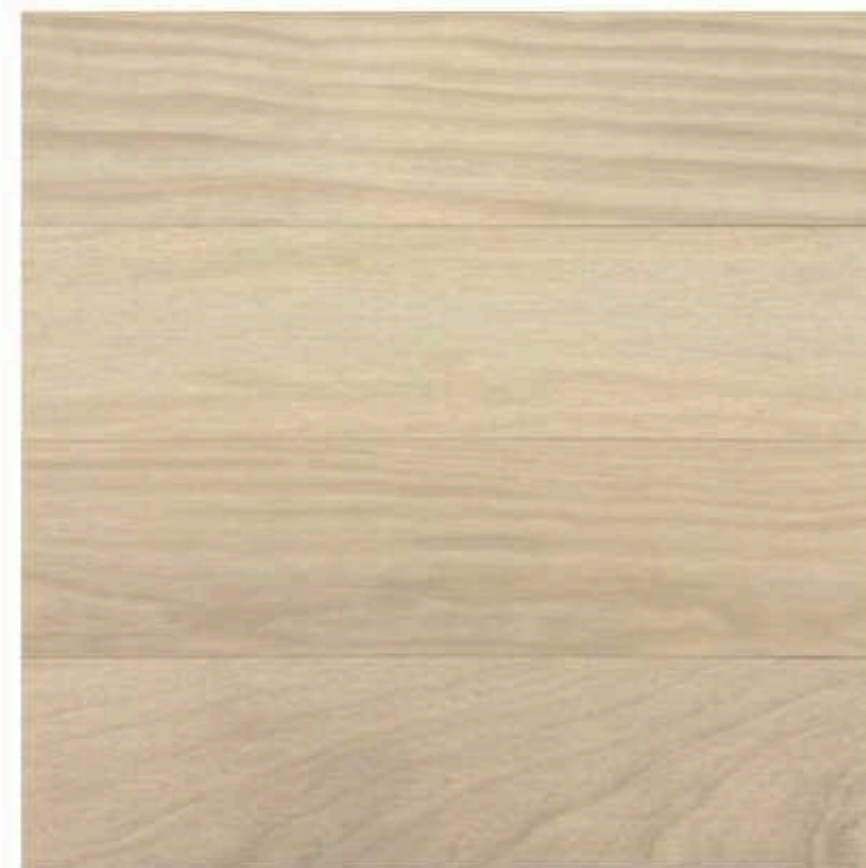


YOSÉ: ACCOYA WOOD
Accoya

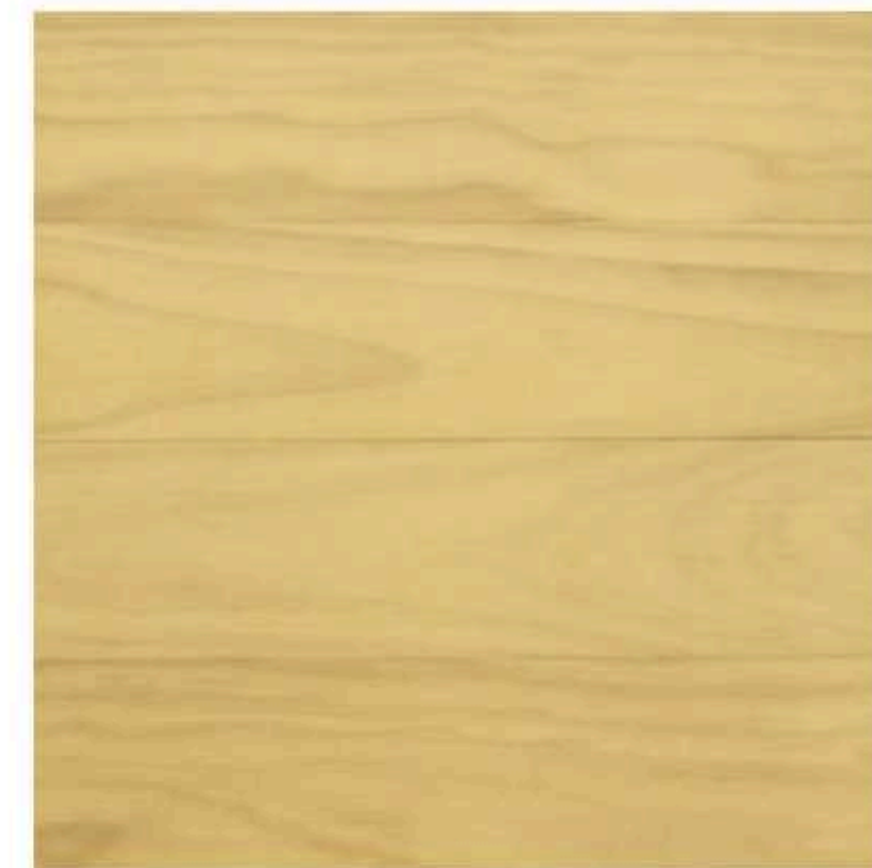

ZETHYN: ACCOYA WOOD
Accoya

reSAWN TIMBER co.TM
The Value of a Natural Product is Without Equal.TM

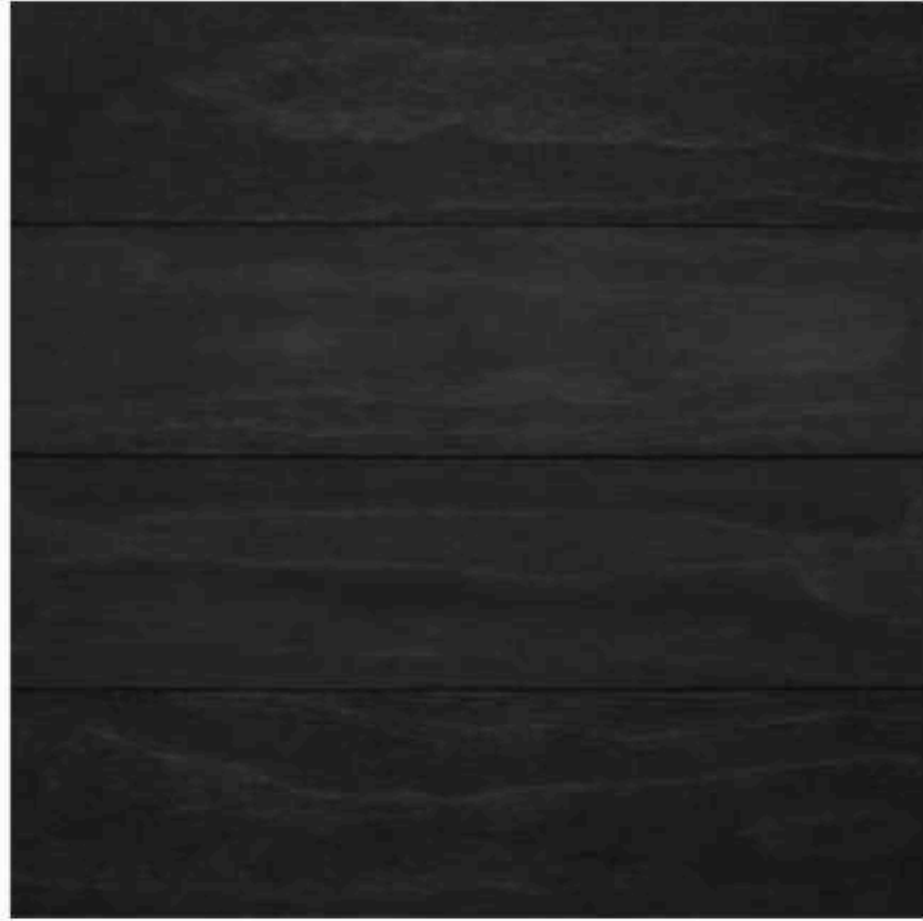

KALĀ: ACCOYA SHOU SUGI BAN
Accoya



UNAGI 2.0: ACCOYA SHOU SUGI BAN
Accoya

NON-CHARRED



OXFORD: ACCOYA FOR INTERIOR AND
EXTERIOR CLADDING AND DECKING
Accoya



GREY MATTER: ACCOYA FOR INTERIOR
AND EXTERIOR CLADDING
Accoya



MARENGO: ACCOYA FOR INTERIOR
AND EXTERIOR CLADDING
Accoya




KOWHAI: ACCOYA FOR EXTERIOR SID-
ING AND DECKING
Accoya

CHARRED



IKIGAI: ACCOYA SHOU SUGI BAN
Accoya

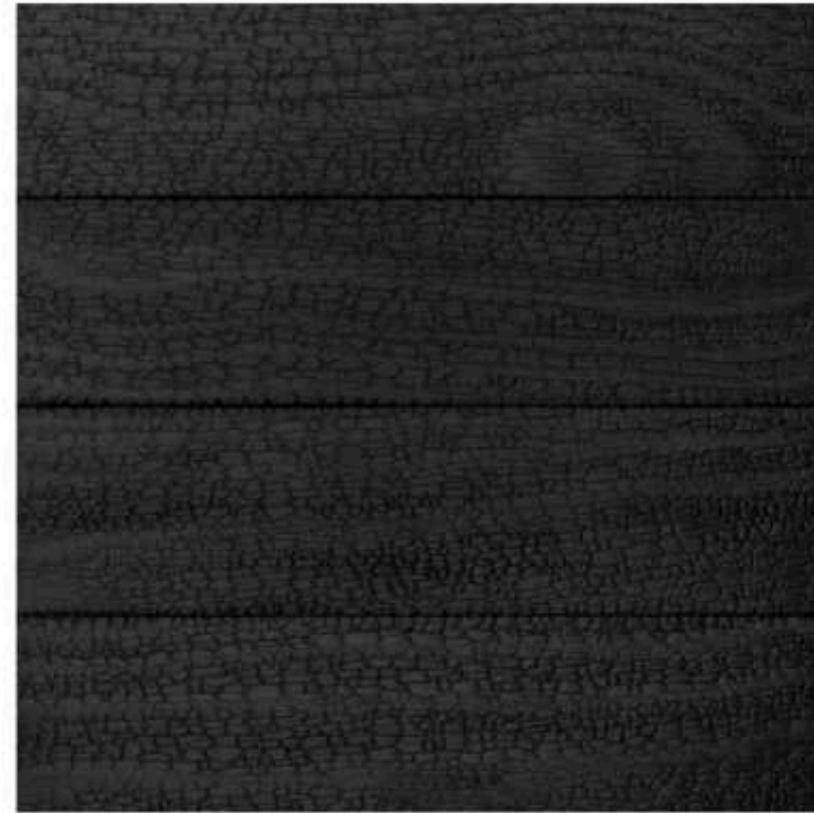

MATSU 2.0: ACCOYA SHOU SUGI BAN
Accoya



MATSU: ACCOYA SHOU SUGI BAN
Accoya



NIGIRI: ACCOYA SHOU SUGI BAN
Accoya



SAMITTO: ACCOYA SHOU SUGI BAN
Accoya

ABOUT ACCOYA

Accoya® is wood, but not as you know it. It is modified timber in which a process called acetylation, a cutting-edge patented technology, enables it to resist rot, defy the elements and stay strong for decades. Guaranteed for 50 years above ground and 25 years in ground or freshwater, its performance and properties are remarkable. From joinery for the home to bridges submerged in water, Accoya wood is a leading material that stands up to every application challenge – decking, cladding and more.

Shou sugi ban Accoya® is the combination of high-performance modified wood and an award-winning charred technique. Inspired by an ancient Japanese process that dates back to the 1700s, shou sugi ban enhances the exterior performance and aesthetic value of natural wood products. Due to the enhanced durability of Accoya®, a dense outer char layer allows the wood to seamlessly transition to a beautiful weathered look. All of our CHARRED shou sugi ban Accoya® products are FSC certified and come with a 50-year warranty on the wood when used above ground; 25-year warranty when used at/below ground level.

ABOUT ACCOYA

MODIFICATION PROCESS

1. Wood is Sourced

Accoya sources sustainable, plantation grown Radiata Pine.

2. Raw wood reacts with acetic anhydride.


Naturally occurring free hydroxyl groups are exposed to acetic anhydride (a byproduct of acetic acid) and the molecular structure is changed.

3. Free hydroxyl groups transform to acetyl groups.


The ability of the wood to absorb water is greatly reduced, and the wood is now more dimensionally stable and durable.

4. The resulting acetic anhydride is recycled.

Acetic anhydride comes from acetic acid (vinegar in a dilute form), and releases no toxins into the air.

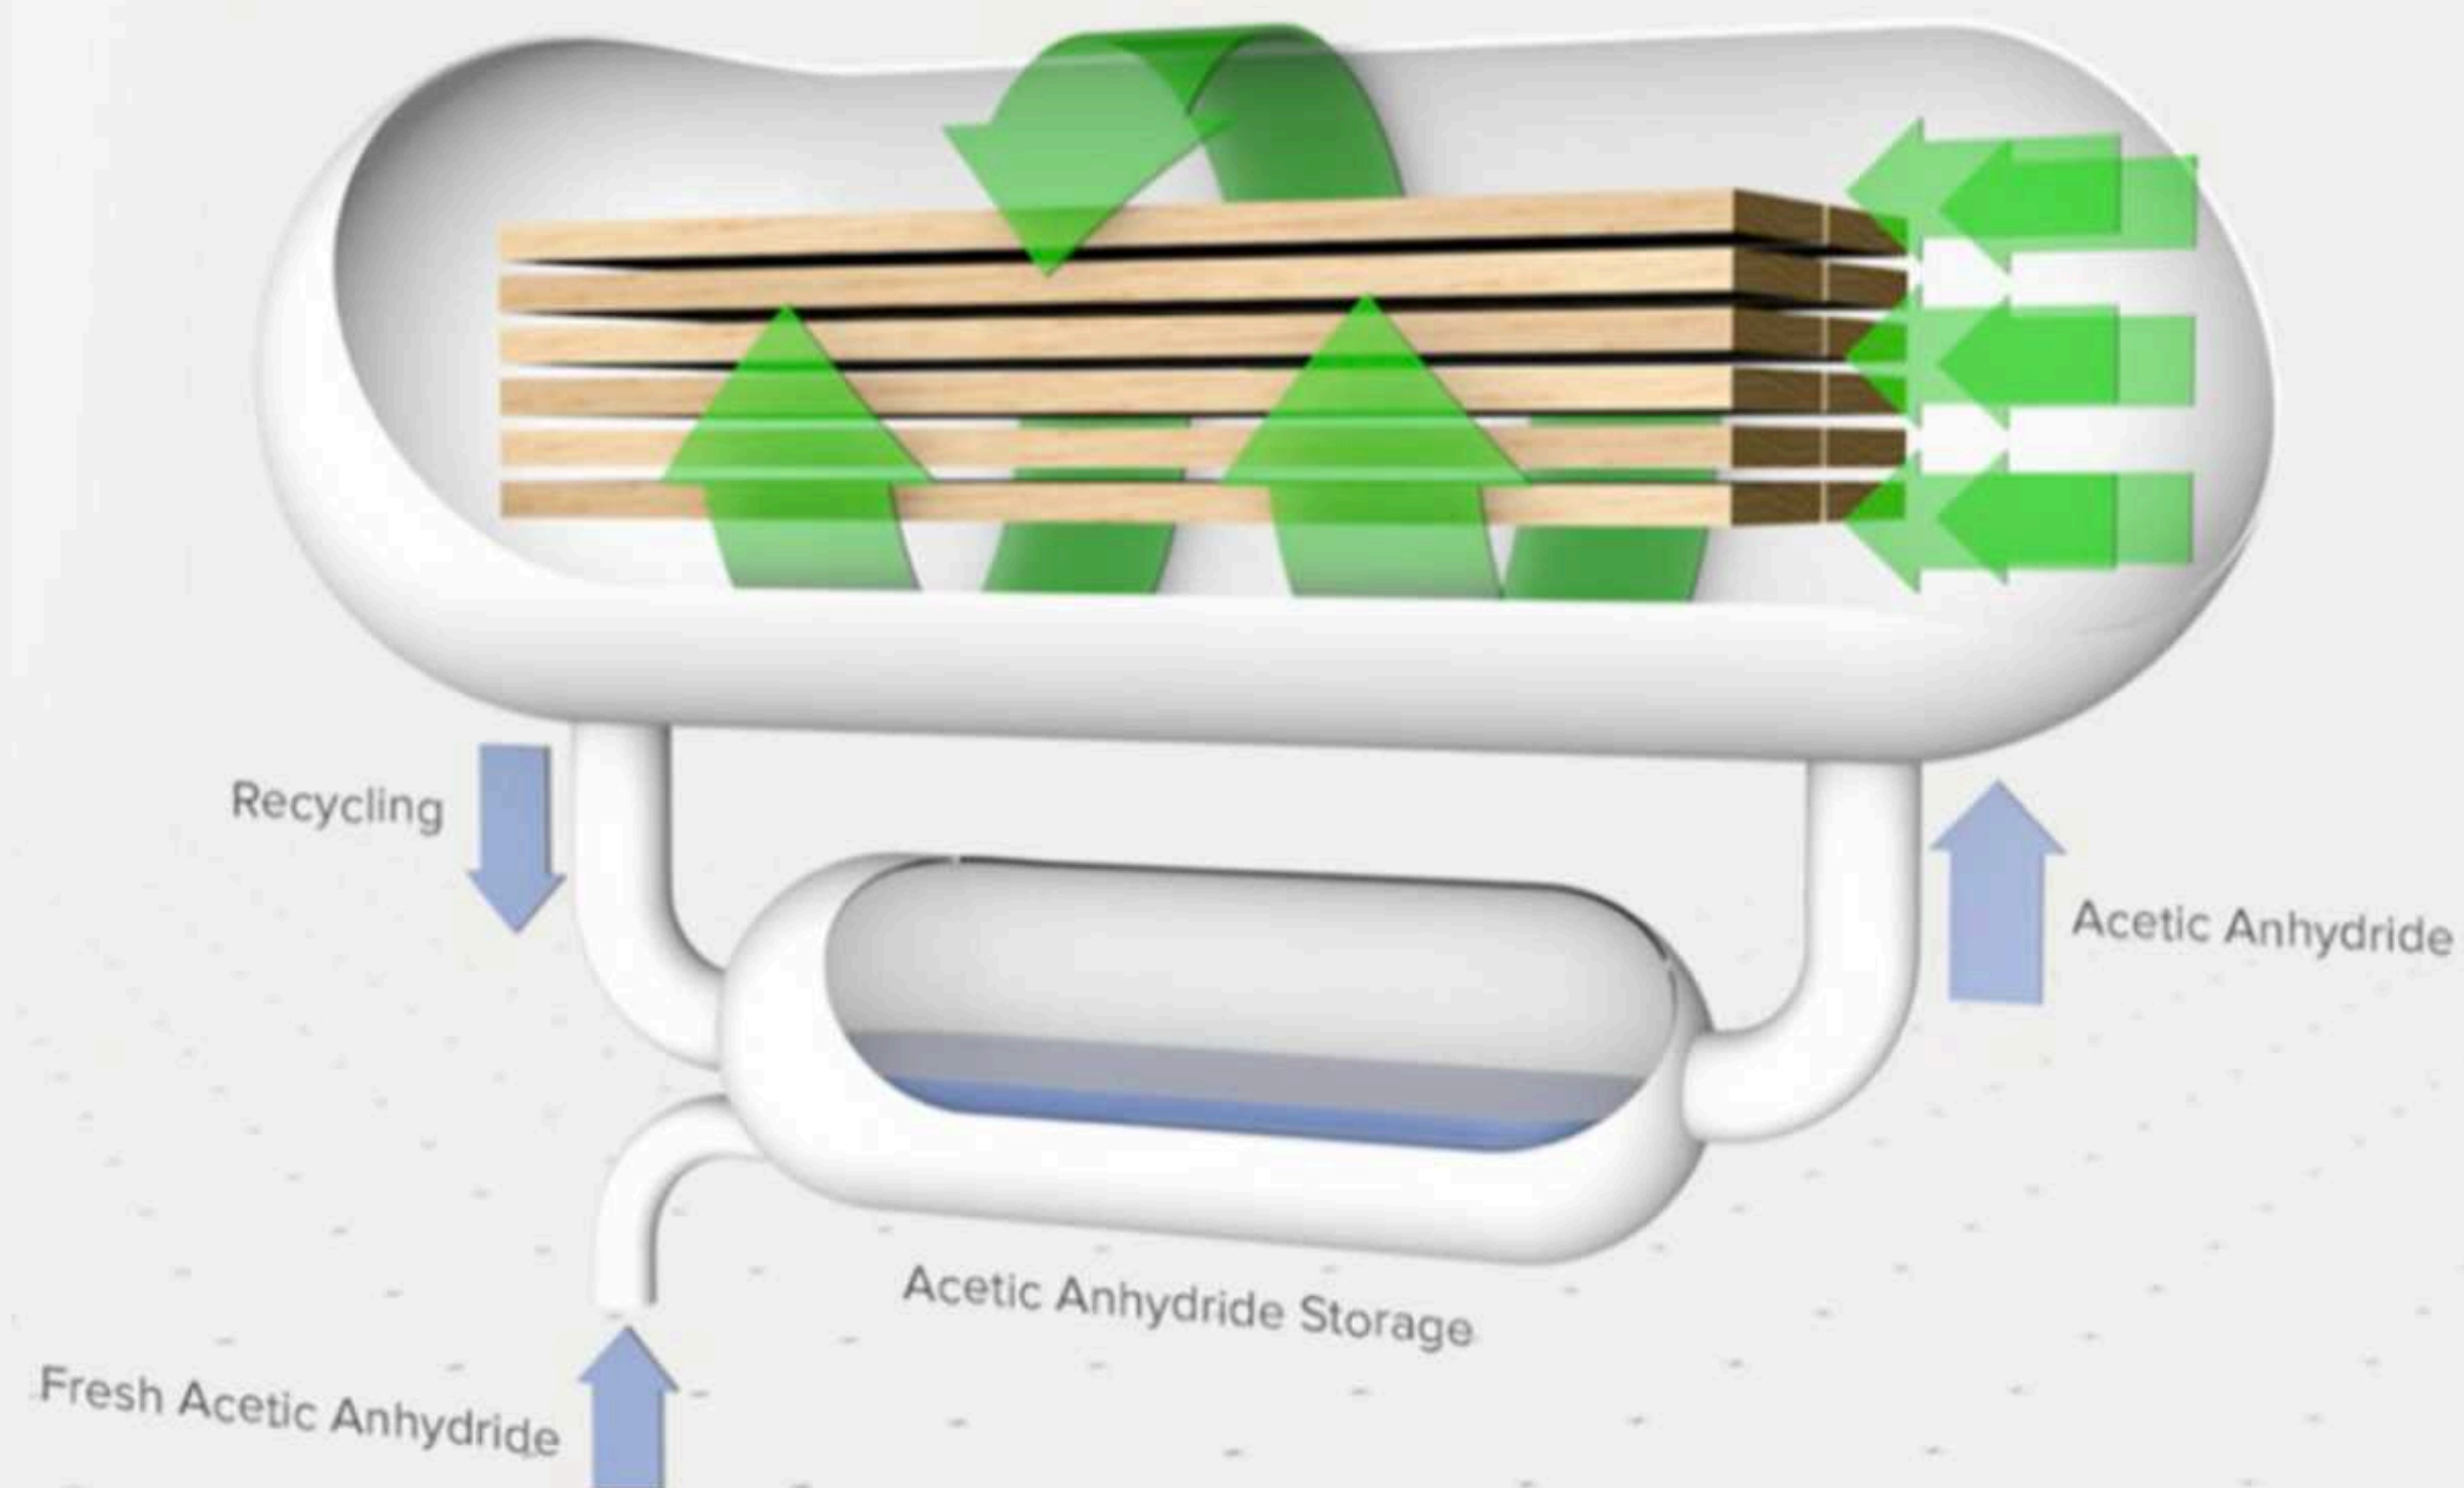

NOTE: STICKER STAINS

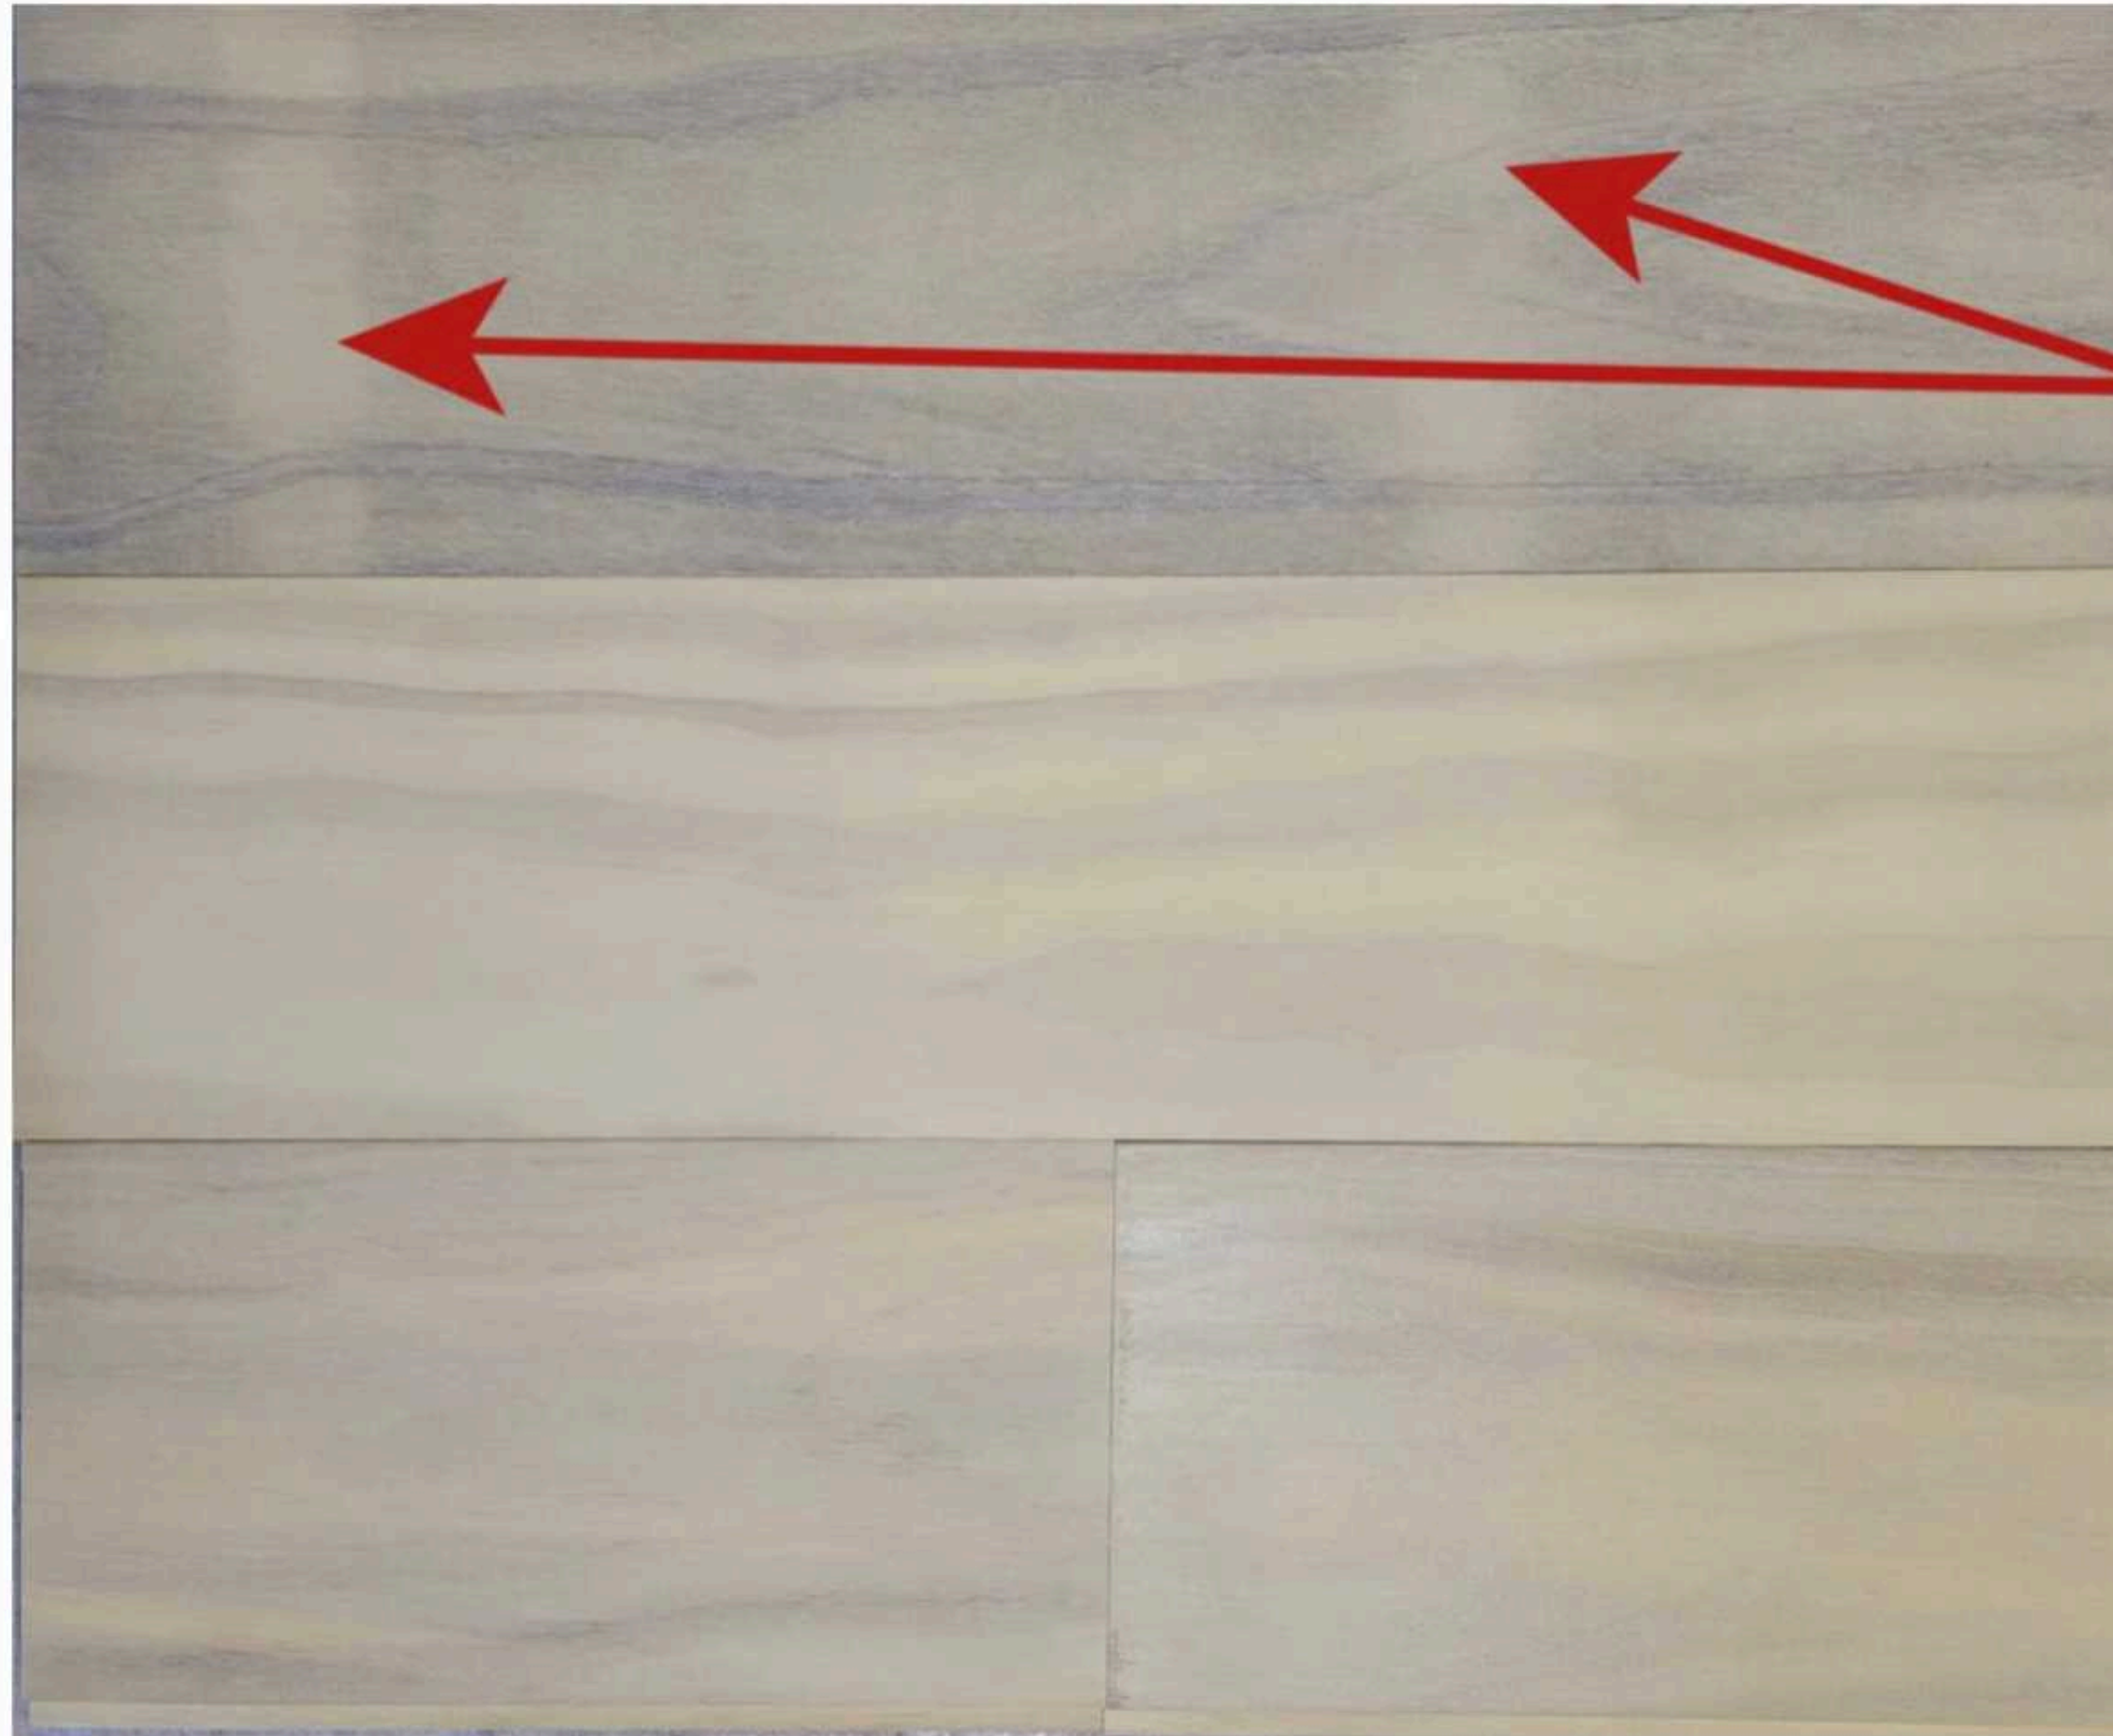

ABOUT ACCOYA

Sticker stains are caused by separating planks with sticks (or 'stickers') during the process of acetylation.

For Accoya® designs finished with lighter, transparent top coats, such as MAHO (shown) and PALAWAN, these sticker stains will be visible on day 1. After about 2 months of weathering, the visual contrast will fade and be less noticeable.

ABOUT ACCOYA

ACCOYA BENEFITS



Dimensional Stability.

Swelling and Shrinkage Reduced by 75% or More



Insect Barrier.

Indigestible to a wide range of insects, including termites



Outstanding Durability.

50 year above ground warranty; 25 year in ground/freshwater warranty



From Sustainable Sources.

Sourced from FSC and other regionally certified woods.



Non-toxic and Recyclable.

May be safely reused, recycled and incinerated.



Naturally Insulating.

Ideal for applications where energy conservation is important.



innovation in wood



SUSTAINABLE
CHOICE


By significantly enhancing the durability and dimensional stability of fast growing, abundantly available certified wood species, Accoya® wood provides compelling environmental advantages over scarce slow growing hardwoods, woods treated with toxic chemicals, and non-renewable carbon-intensive materials such as plastics, steel and concrete.

The Accoya® advantage:

- Always sustainably sourced from abundantly available, often fast growing wood species
- Use phase advantages: increased life span, less maintenance, superior thermal insulation
- Non toxic and 100% recyclable - a perfect fit with the bio-cycle of the C2C philosophy
- CO₂ negative over the full life cycle

ANNUAL YIELD

[m³ / ha / year]

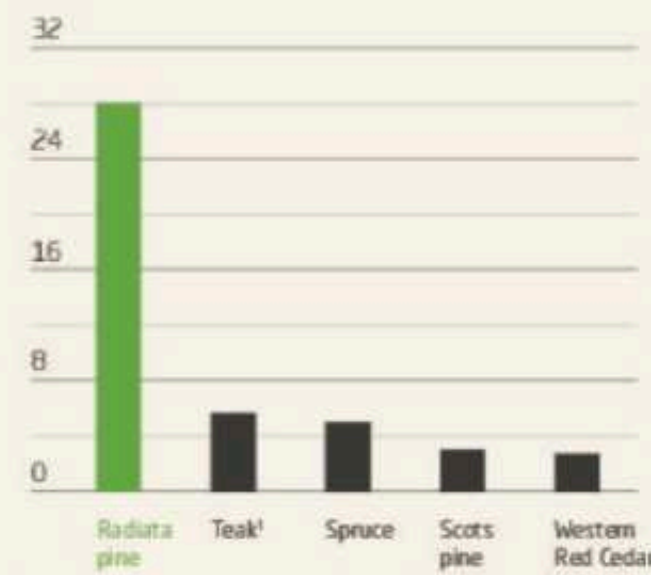


Annual yield comparison of species in cubic meters of wood produced per hectare per year

¹ Plantation grown

CARBON FOOTPRINT

[kg CO₂ eq / window frame]

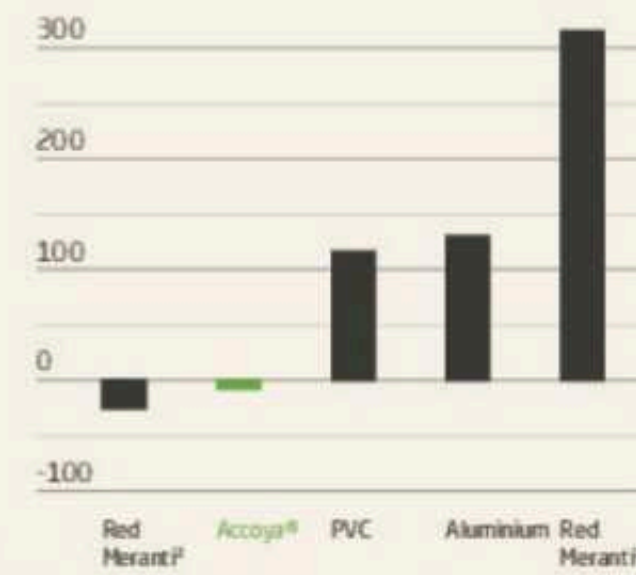

Greenhouse gas emissions (cradle to grave) in kg CO₂ eq per window frame in various material alternatives

² Sustainably sourced
³ Unsustainably sourced

ECOLABELS



Accoya® wood has been awarded various accreditations and eco-certifications further highlighting its unique sustainability properties.



BREEAM®

LEEDv4: MR 1, MR 2, MR 3, MR 4.1
BREEAM: MAT 1, MAT 5

Read more on www.accoya.com/sustainability

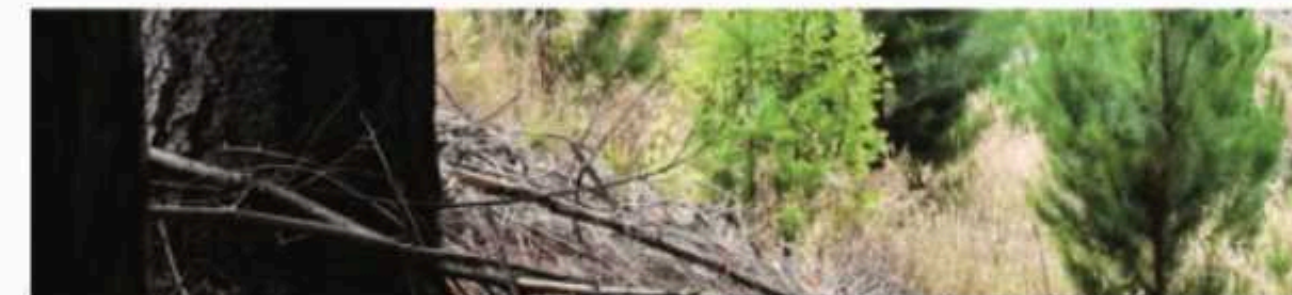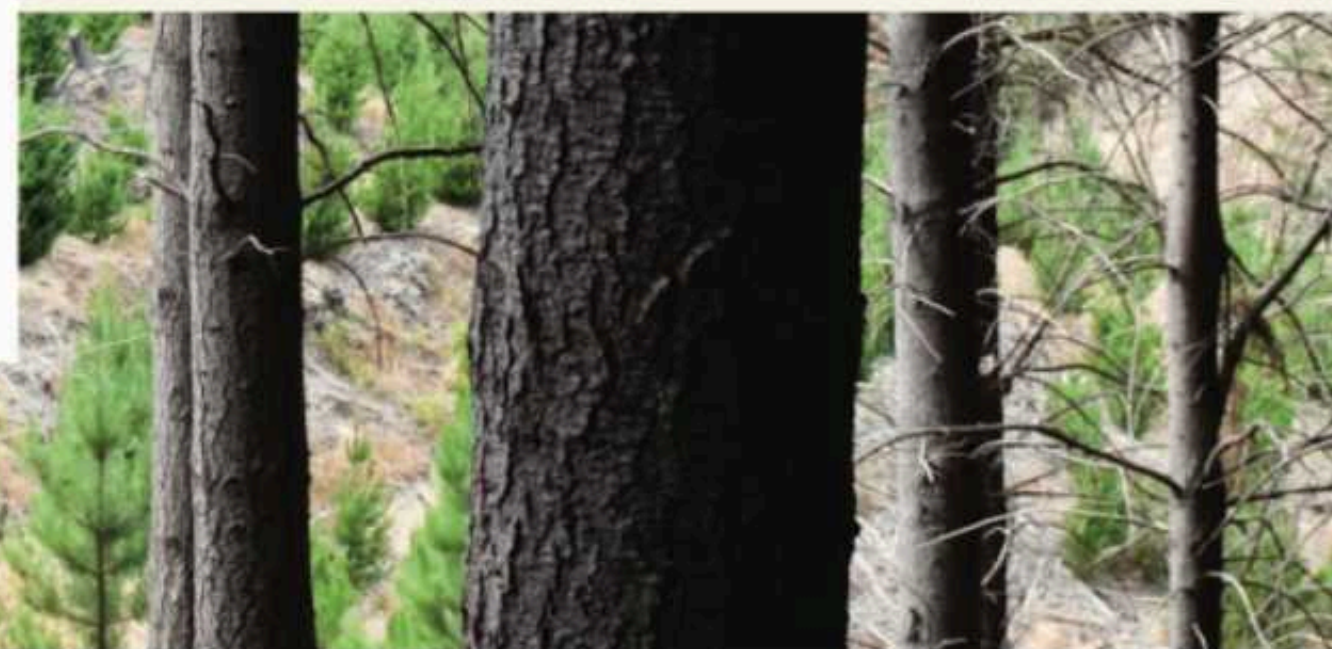

To find out more,
please visit
www.accoya.com

ACCSYS
GROUP

ABOUT ACCOYA



innovation in wood



DIMENSIONALLY
STABLE

Accoya® wood's superior dimensional stability (resistance to swelling and shrinkage) exceeds all commonly used species, including Teak, Sapele and Iroko. Accoya® wood has been tested over prolonged periods in all types of weathering conditions - above ground, below ground and even in water - and has been proven to withstand even the toughest of external environments.

The Accoya® advantage:

- Reduced swelling and risk of jamming in humid conditions
- Better fitting windows and doors in all weathers
- Less frequent coatings maintenance

TRADA TRIAL RESULTS

Accoya® wood was the only wood that did not cup in this TRADA** trial on wooden cladding.



REDUCED SWELLING


Acetylated wood*



Unmodified wood



TANGENTIAL SHRINKAGE

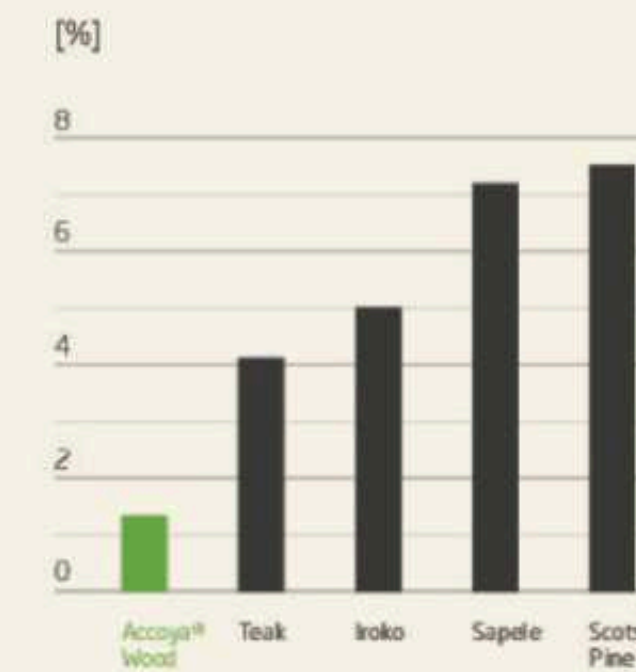

Typical tangential shrinkage from fully soaked to oven dry - the most extreme laboratory test.

ABOUT ACCOYA

To find out more,
please visit
www.accoya.com

ACCSYS
GROUP

* Accoya® wood is made using a modification process called acetylation
** Timber Research and Development Association www.trada.co.uk
© Accsys Technologies February 2017. Accoya and the Trimarque Device are registered trademarks owned by Titan Wood Limited, a wholly owned subsidiary of Accsys Technologies PLC, and may not be used or reproduced without written permission.

KEBONY

Much of Kebony wood's enhanced performance characteristics stem from the patented modification process they have adopted. Differing from other modified wood products, Kebony uses furfuryl alcohol as its modifying agent. Furfuryl alcohol is a non-toxic, bio-based fuel that impregnates the wood's cells through a vacuum pressure treating process. When the impregnation is finished, the resulting cells are slightly changed, and that results in changes to the physical and mechanical properties of the wood byproduct. Kebony is beautiful wood recommended by leading architects. Our CHARRED shou sugi ban Kebony's performance has been proven in a variety of applications, including decking and cladding, because of its high-quality characteristics.




VETTE: KEBONY SHOU SUGI BAN
Kebony



NATT: KEBONY SHOU SUGI BAN
Kebony



KOS: KEBONY SHOU SUGI BAN
Kebony

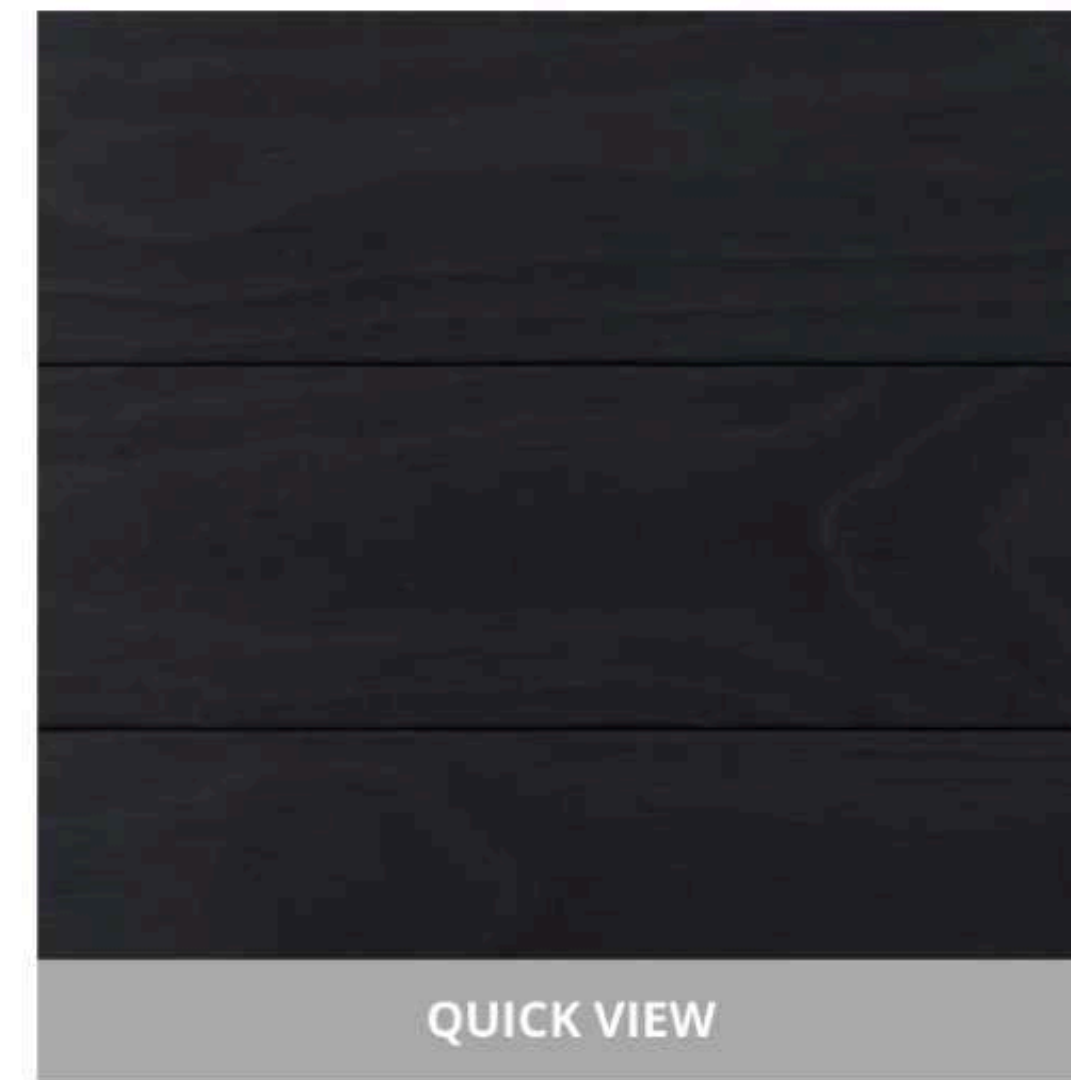

SVERTE: KEBONY SHOU SUGI BAN
Kebony

ABOUT KEBONY

reSAWN's Kebony products utilize the wood's natural beauty. Kebony is impregnated with furfuryl alcohol, which improves the durability and performance of the wood. When burnt, the wood has a dense, outer char layer that provides extra protection against rot and decay. reSAWN's Kebony designs can be used for exterior applications, interior applications, and decking (VEI & MORO only).

Developed in Norway, the Kebony technology is an environmentally friendly, patented process, which enhances the properties of sustainable softwood with a bio-based liquid. The process permanently modifies the wood cell walls giving Kebony premium hardwood characteristics and a rich brown color. After exposure to sun and rain the wood develops a natural silver-gray patina. Performance is maintained, while beauty is enhanced. Kebony is available in select grade.

ABOUT KEBONY

BENEFITS



Guaranteed Long Life

Outdoor life time warrant for 30 years



Outstanding Stability

Swelling & shrinking reduced by 40-60%



Maximum Hardness

Hardness increased to levels of the best hardwoods



High Resistance

Against fungi, rot, & wood destroying organisms



Refined & Beautiful

Develops a natural patina from sun and rain



Safe & Toxin Free

No toxins or harmful impregnation substances


Kebony® technology

STEPS


1 Impregnation



2 Curing & Drying

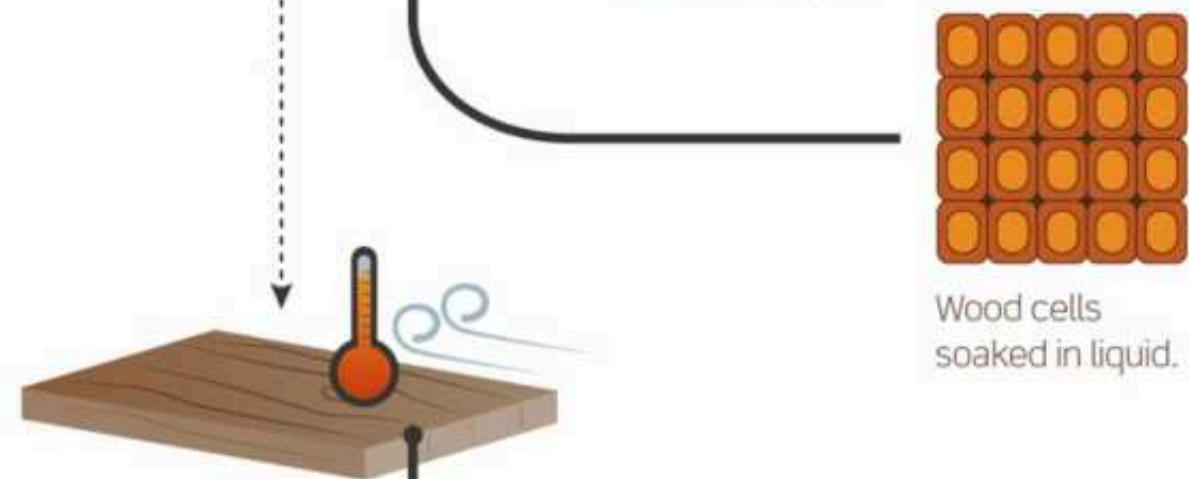

3 Kebony wood

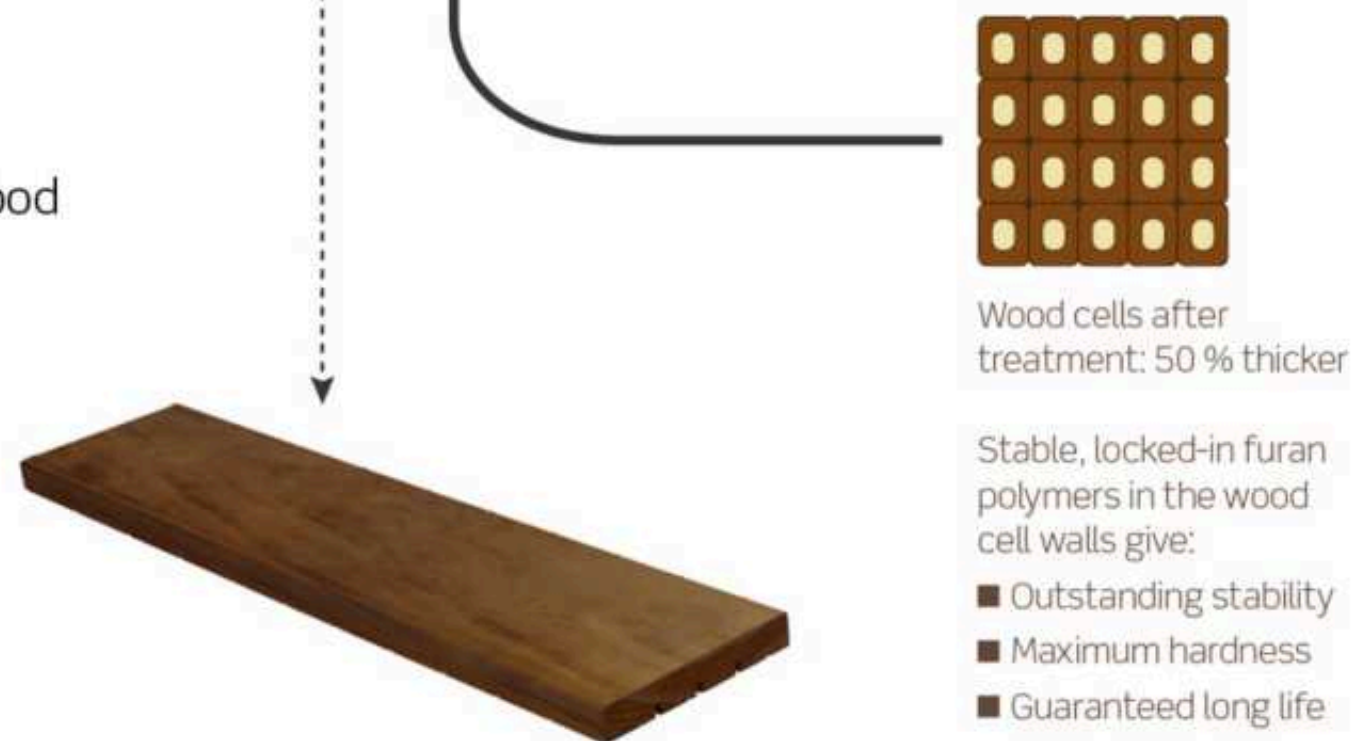

ABOUT KEBONY

SUPERIOR WEATHERING

Performance maintained,
beauty enhanced



The Kebony® technology gives a deep rich brown colour.

After exposure to sun and rain the wood develops a natural silver-gray patina.

Original colour can be maintained using UV protection oils.

The **Beach Pavilion Bexhill-on-Sea** in Sussex / UK. The pictures show how the elements have given the wood a beautiful patina.
Left: NEW WOOD
Right: WEATHERED



New




Kebony character
(Scots Pine)




Kebony clear
(Radiata Pine)

Weathered

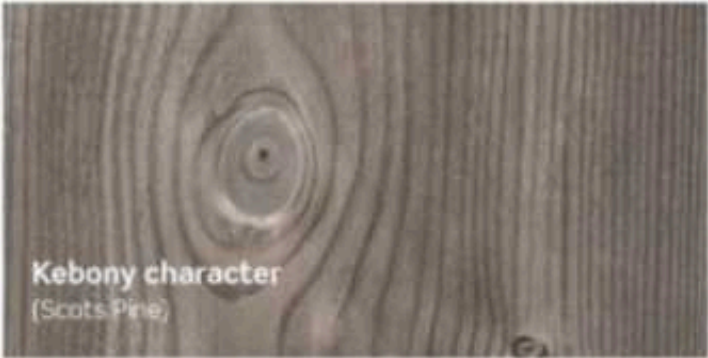

Kebony character
(Scots Pine)

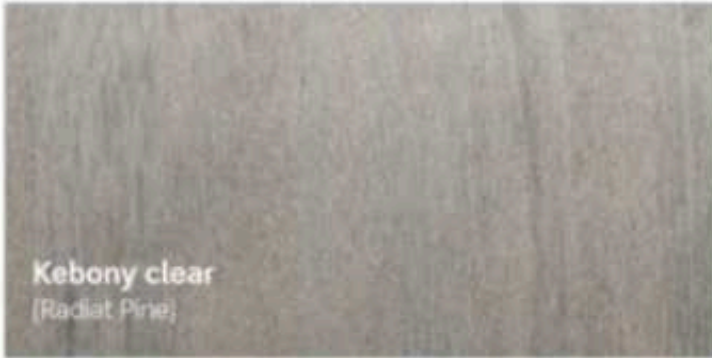

Kebony clear
(Radiata Pine)

ABOUT KEBONY



WESTERN RED CEDAR

Western Red Cedar is well-known for its durability and beauty as a natural wood cladding material. It is naturally resistant to rot, decay, and insects and displays crisp yet superbly rich, tonal properties. CHARRED shou sugi ban western red cedar adds an extra dimension of aesthetic value to the Pacific NorthWest softwood.



PACKARD 2.0: SHOU SUGI BAN
Western Red Cedar



TRUMAN: SHOU SUGI BAN CHARRED
WESTERN RED CEDAR
Western Red Cedar



JENNINGS 2.0: SHOU SUGI BAN
Western Red Cedar

ABOUT WESTERN RED CEDAR

reSAWN offers Western Red Cedar because it's one of North America's great renewable resources. In addition to it's prominence as sustainable exterior material, it's very durable and is one of the lightest commercial softwoods. It is an expansive and popular tree in the Pacific Northwest region of North America. The wood is used to build shingles for roofs, siding (cladding) for homes, decks, and furniture among other applications.

With the use of the classic building material, reSAWN has modernized and expanded the possible design options with CHARRED shou sugi ban and weathered finishes.

reSAWN TIMBER co.TM
The Value of a Natural Product is Without Equal.TM




PACKARD 2.0: SHOU SUGI BAN
Western Red Cedar



ASTOR: WESTERN RED CEDAR
Western Red Cedar



BRUNEAU: WESTERN RED CEDAR
Western Red Cedar

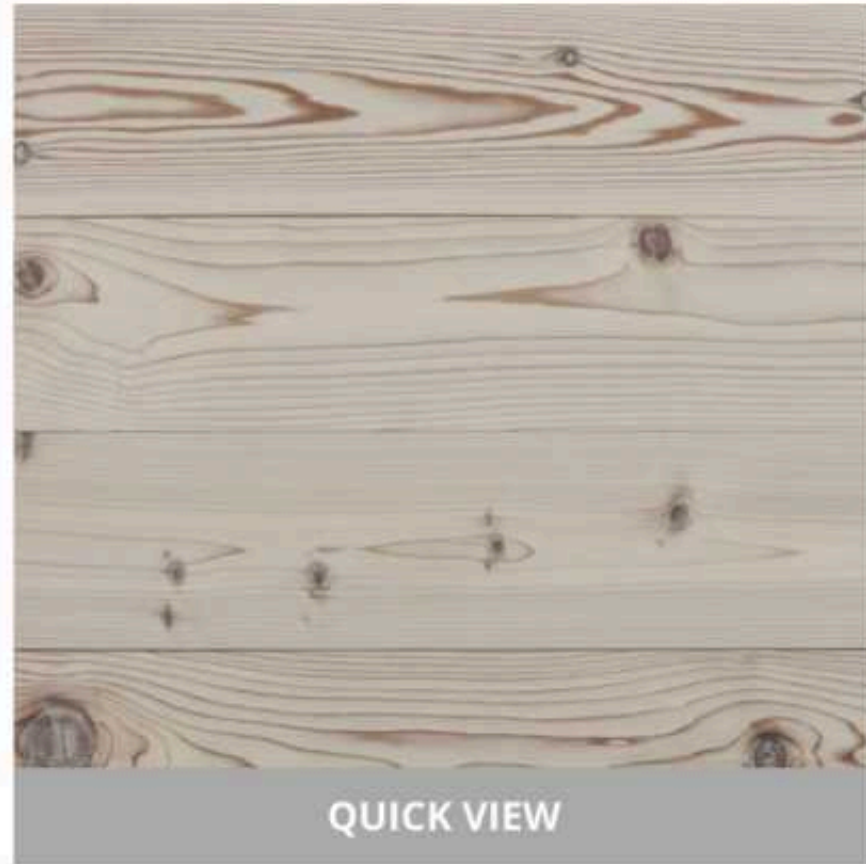

CASCA: WESTERN RED CEDAR
Western Red Cedar



JENNINGS 2.0: SHOU SUGI BAN
Western Red Cedar




REYES: WESTERN RED CEDAR
Western Red Cedar



TETON: WESTERN RED CEDAR
Western Red Cedar




TRUMAN: SHOU SUGI BAN CHARRED
WESTERN RED CEDAR
Western Red Cedar

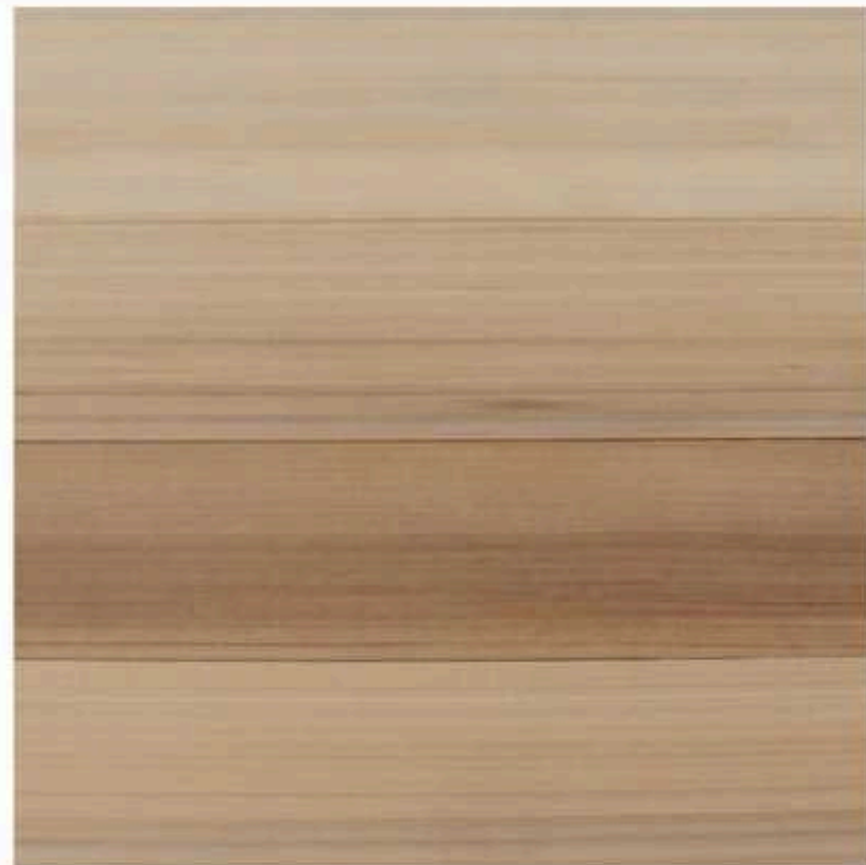

WHIDBEY: WESTERN RED CEDAR
Western Red Cedar


CEDAR GRADES

SELECT TIGHT KNOT

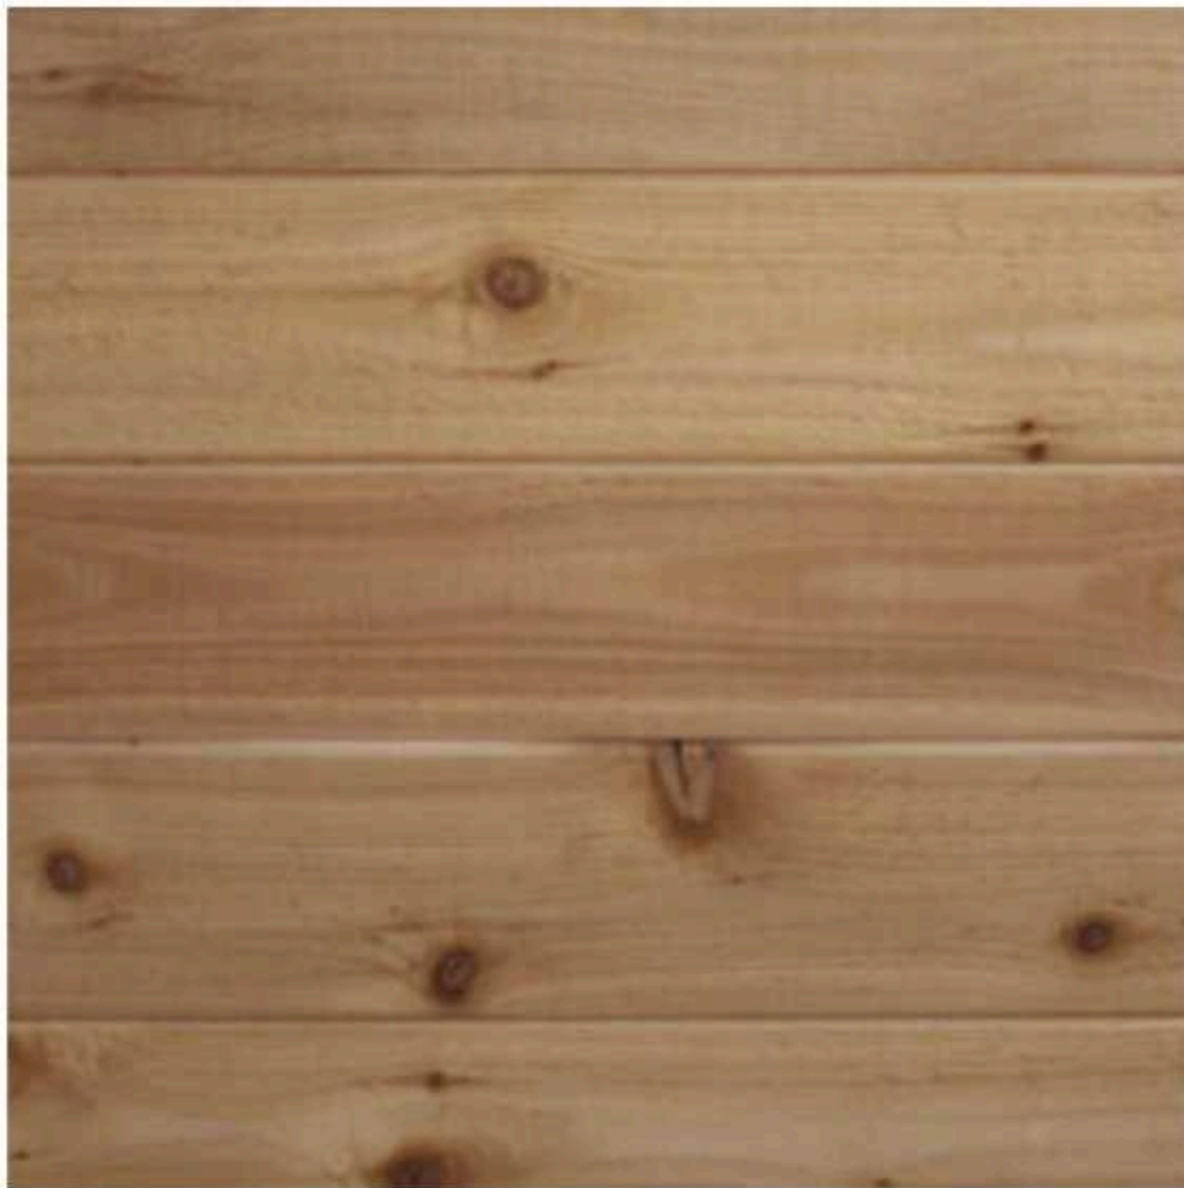

Rustic in appearance, the basis for this grade are the knots, burls, and naturally occurring markings that are of fairly uniform distribution. In this grade, the knots are sound and tight. Star checked and/or slightly chipped knots permitted.

A & BETTER CLEAR VERTICAL GRAIN

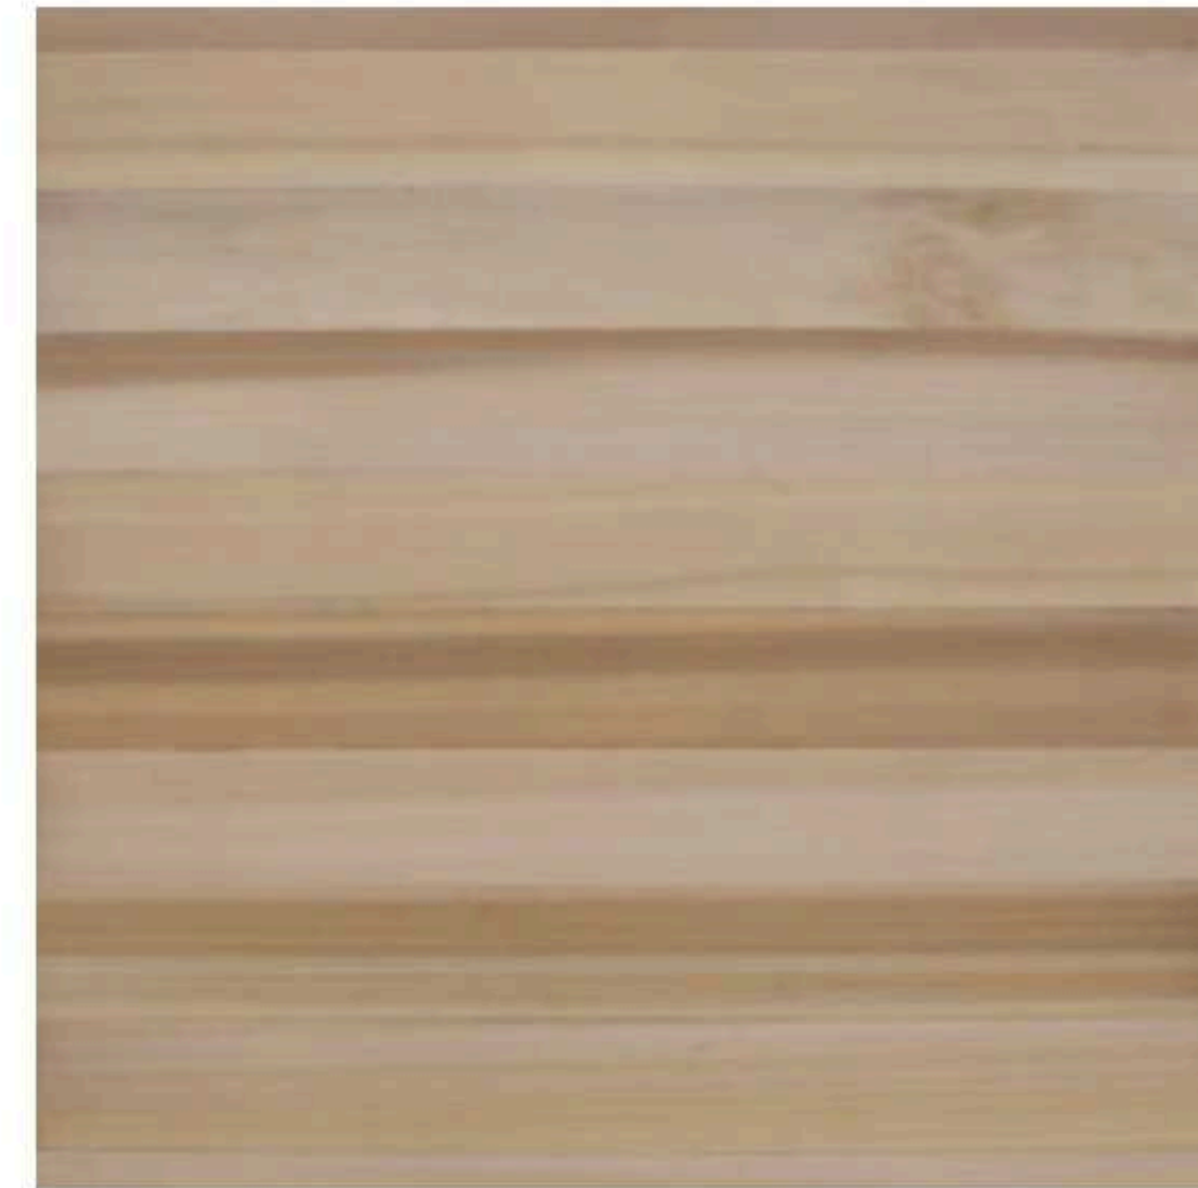

This is the highest grade of Western Red Cedar. Vertical grain means that the growth rings are parallel to each other on the face of the board, and very light skips on the non-graded face. The wood is sawn specifically to achieve that look. Limiting provisions include very light torn grain and very light skips on the non-graded face.


ABOUT ALASKAN YELLOW CEDAR

reSAWN offers Alaskan Yellow Cedar (AYC) as a sustainable exterior material. Yellow Cedar trees can be found along the North American Pacific Coast from the California-Oregon border to Southern Alaska. AYC is highly aromatic and highly decay resistant. It has exceptional resistance to exterior elements and insects and is easy to work with. It can be used for exterior wall & roof cladding and interior wall & ceiling cladding.

Using a classic building material like Alaskan Yellow Cedar, reSAWN has modernized and expanded the possible design options with our pre-weathered finish.

ALASKAN YELLOW CEDAR


Sourced along the Pacific coast from Alaska to Oregon, Alaskan yellow cedar is well known as the hardest cedar in the world. It's slow growth rate makes it highly resistant to disease and decay. It also has a high degree of stability. We chose Alaskan yellow cedar for its ability to accept and hold finishes, which made it a perfect species for our weathered designs. The weathered designs provide an exterior material that will have minimal aesthetic variation throughout its installation lifecycle.

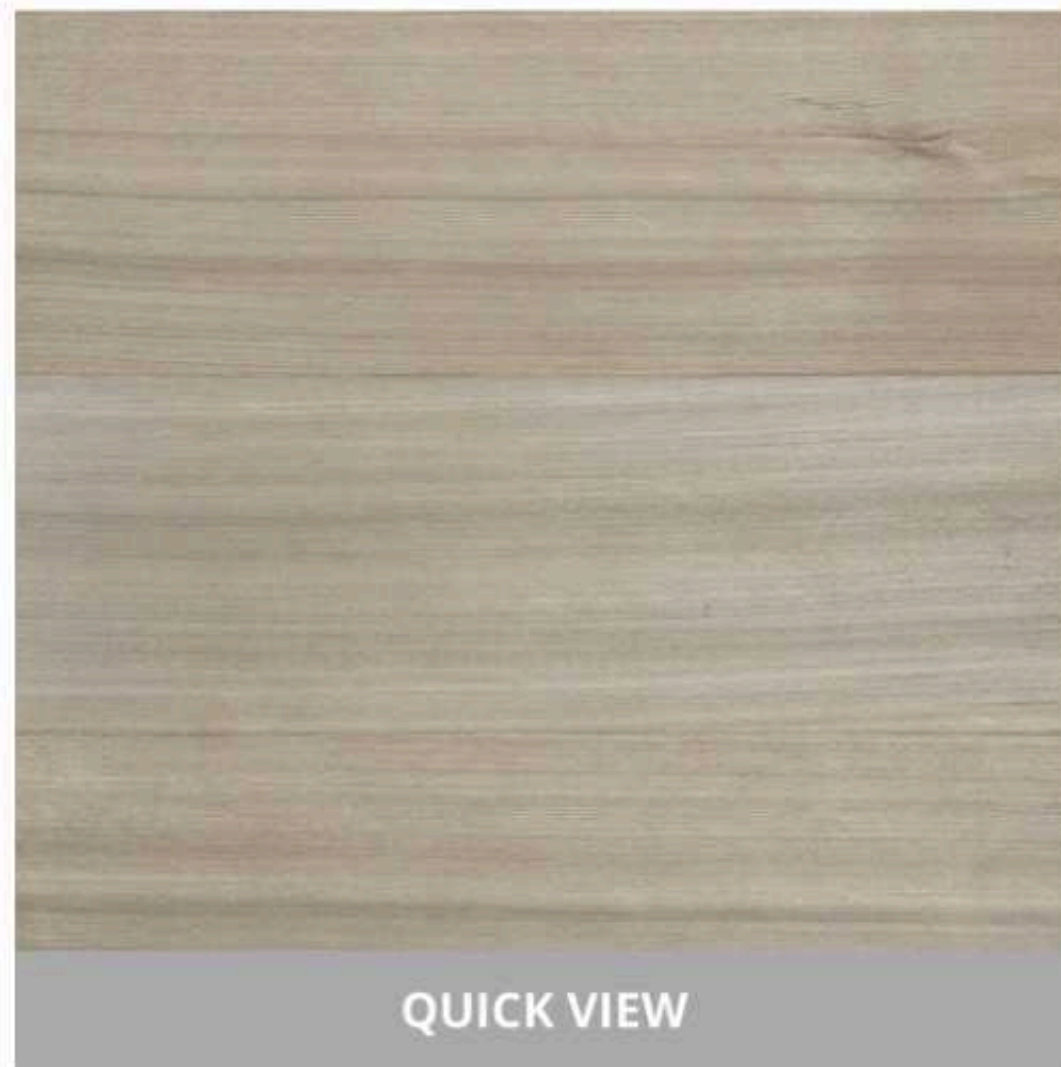

QUICK VIEW

WILLIWAW: WEATHERED ALASKAN
YELLOW CEDAR

Alaskan Yellow Cedar

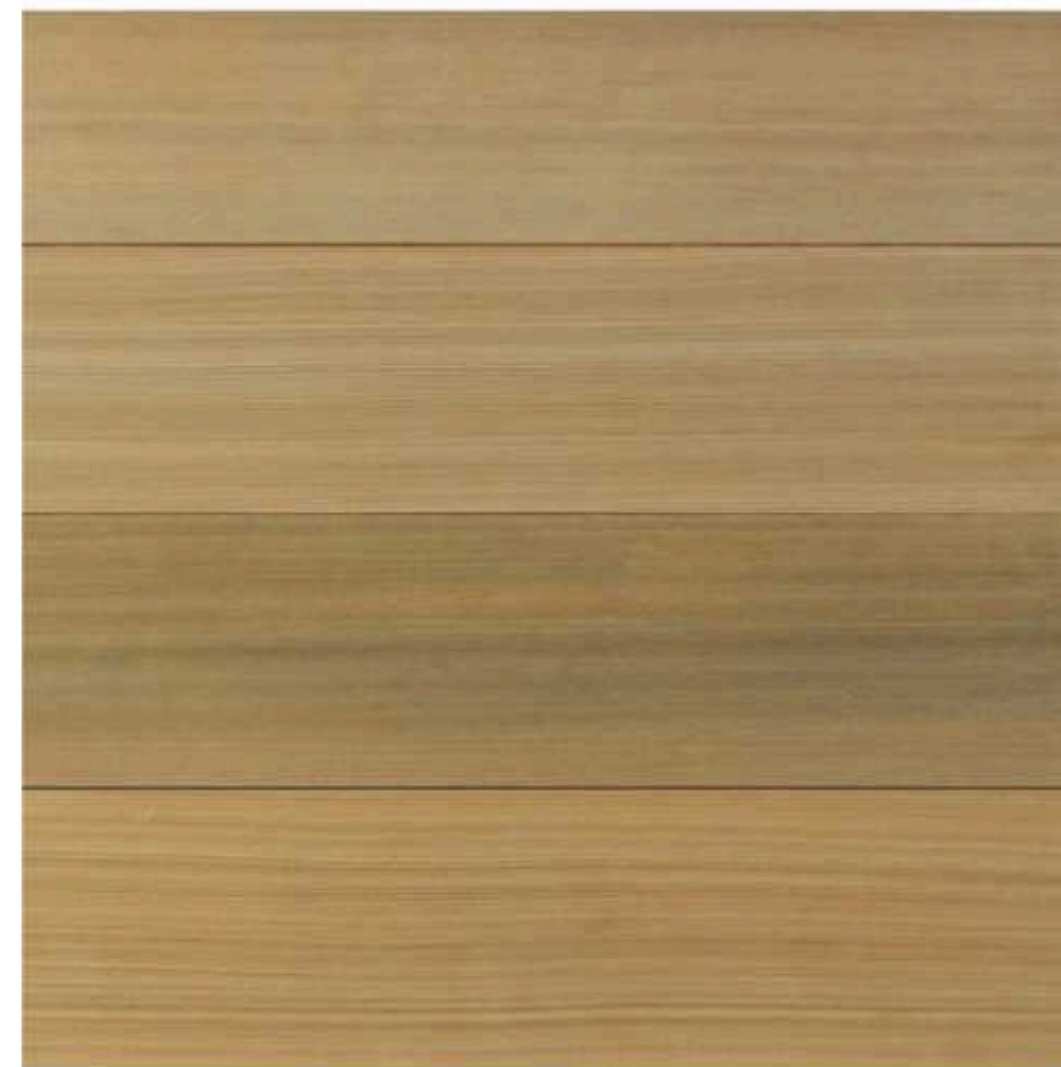

MATANUSKA: WEATHERED ALASKAN
YELLOW CEDAR

Alaskan Yellow Cedar



TAKU: WEATHERED ALASKAN YELLOW
CEDAR

Alaskan Yellow Cedar



WASHOE: WEATHERED ALASKAN YEL-
LOW CEDAR


Alaskan Yellow Cedar




IRUKA: SHOU SUGI BAN
Cypress



KURO: SHOU SUGI BAN
Cypress

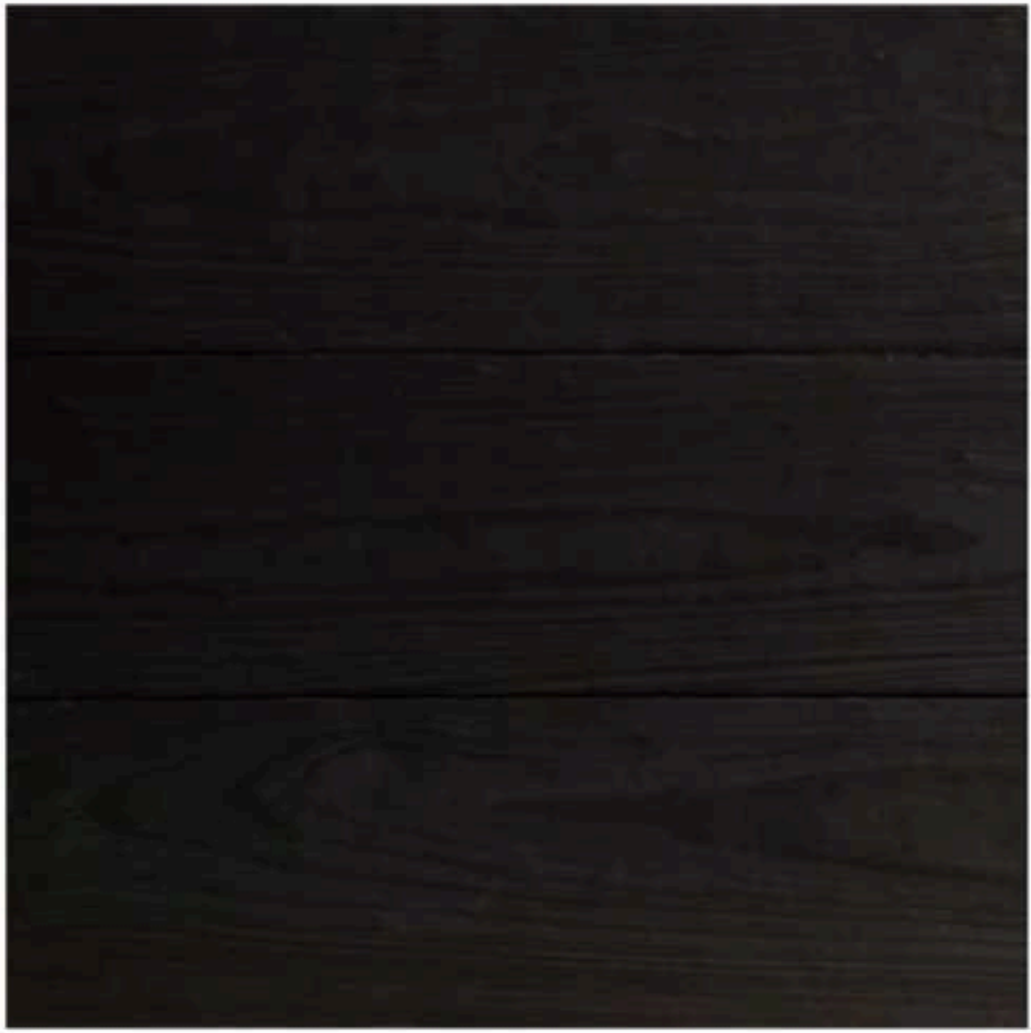

MONOGATARI 2.0 : SHOU SUGI
BAN
Cypress

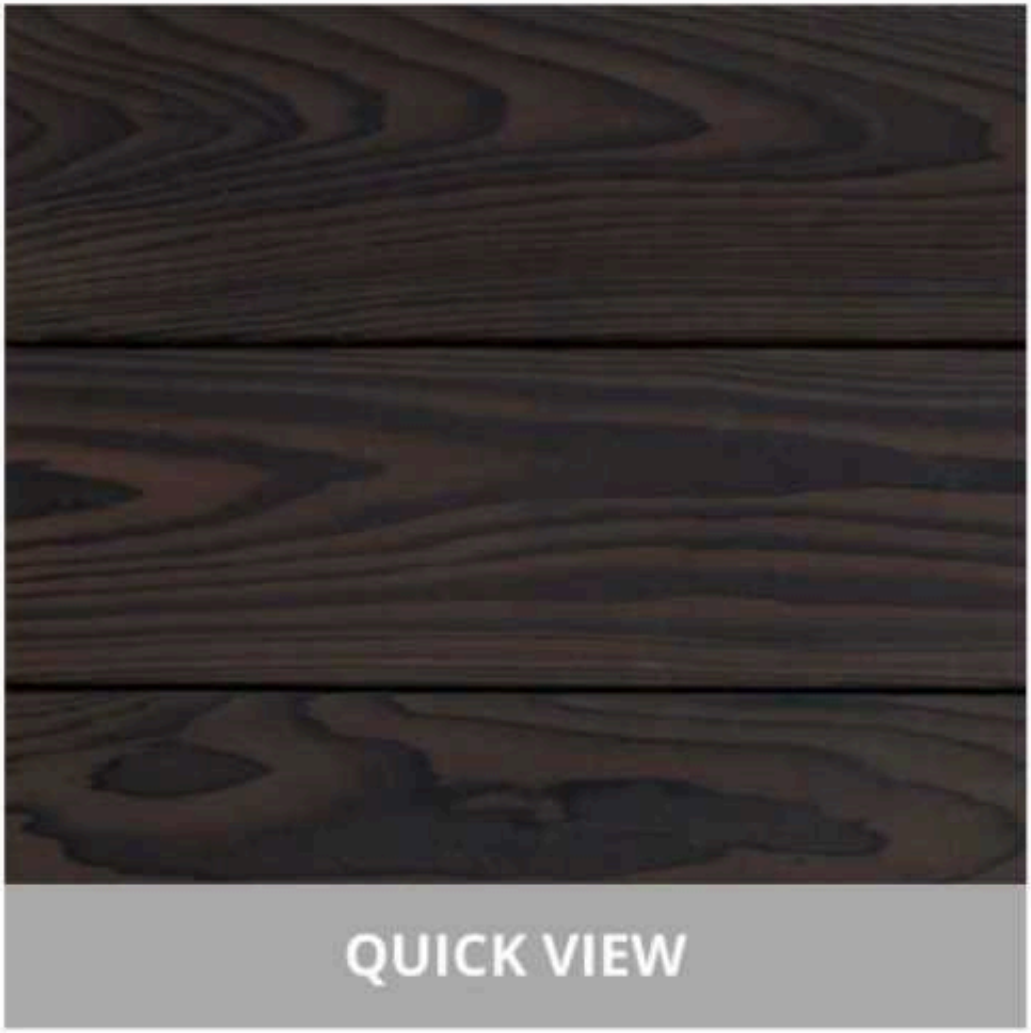

PONZU 2.0: SHOU SUGI BAN
Cypress



SURETO: SHOU SUGI BAN
Cypress



TORA 2.0: SHOU SUGI BAN
Cypress

CYPRESS

Cypress is notable for its color consistency, density and hardness. Although cypress is a softwood, it grows alongside hardwoods and traditionally has been grouped and manufactured with hardwoods. The oils in cypress' heartwood make it one of the most durable woods when exposed to moisture conditions causing decay. Cypress trees are natives of the south. They are found primarily in wet, swampy areas along the Atlantic Coastal Plain from Delaware to Florida. reSAWN recommends Select Grade CHARRED shou sugi ban cypress for exterior applications.

ABOUT CYPRESS

Cypress is notable for its color consistency, density and hardness. Although cypress is a softwood, it grows alongside hardwoods and traditionally has been grouped and manufactured with hardwoods. The oils in cypress' heartwood make it one of the most durable woods when exposed to moisture conditions causing decay. Cypress trees are natives of the south. They are found primarily in wet, swampy areas along the Atlantic Coastal Plain from Delaware to Florida.

BENEFITS

- **DURABILITY**—Cypress trees generate cypressene, a naturally occurring preservative oil that makes cypress heartwood resistant to insects, decay, chemical corrosion and other damaging elements.
- **VERSATILITY**—A favorite choice for long-wearing outdoor applications such as exterior siding, fence posts, telephone poles, docks, and railroad ties.
- **SUSTAINABILITY**—Cypress trees can grow to 150 feet tall and 12 feet in diameter, the wood can lock in substantial amounts of carbon. More cypress is grown than harvested—not considered in danger of extinction.
- **FIRE RESISTANCE**—reSAWN's CHARRED CYPRESS has a Flame Spread Index of 40 and a Smoke Developed Index of 140 to give it a Class B Rating. CHARRED CYPRESS can be fire treated to Class A for interior projects.



COLOR

Light brown to a rich, dark brown.



GRAIN

Tighter, fine grain structure.




DESIGN OPTIONS

Wide Plank or Herringbone

GRADES

#2 COMMON

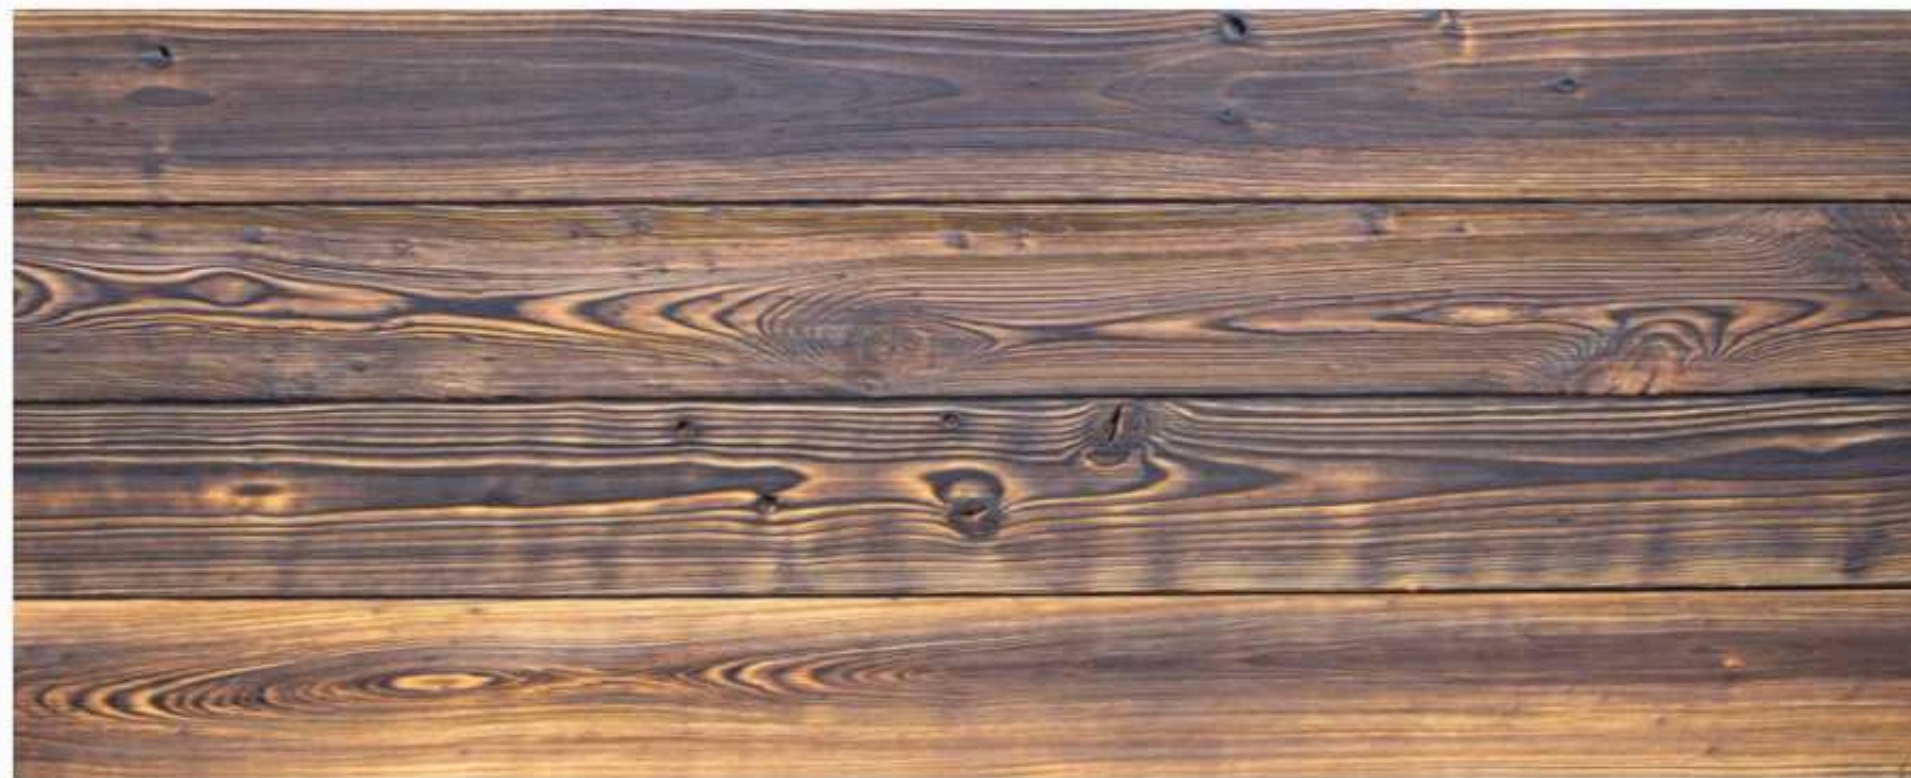

#2 Common is a staple grade useful for all types of general construction, finish, trim, and other uses where ordinary tree characteristics either enhance the appearance of the piece or do not restrict the appropriate application of the piece. This grade is much more rustic than Select grade. #2 Common grade allows for many more knots, character marks, checks, and slight peck. reSAWN offers #2 Common grade for interior applications in all cypress products and for exterior cladding in some cypress products in certain applications.

SELECT




Select grade is of the highest quality and should be specified where appearance and performance are essential. This grade allows very few defects and has few color variations. A nominal 6" wide board is allowed to have one medium knot. A nominal 7" – 9" wide board is allowed to have two medium knots. In boards that are 10" and 12", there can be three medium knots. One medium knot can be substituted for three pin knots. Pin knots must be less than 1/2" in diameter. reSAWN offers Select grade cypress for exterior cladding and interior applications.

INSTALLATION

reSAWN TIMBER co.'s wall cladding can be installed above-grade or on-grade, but is not recommended for installation below grade. This product is intended for use in normal, dry interior environments only and must be kept dry and protected from moisture at all times.

WE RECOMMEND NAIL/STAPLE INSTALLATION OVER PLYWOOD SHEATHING

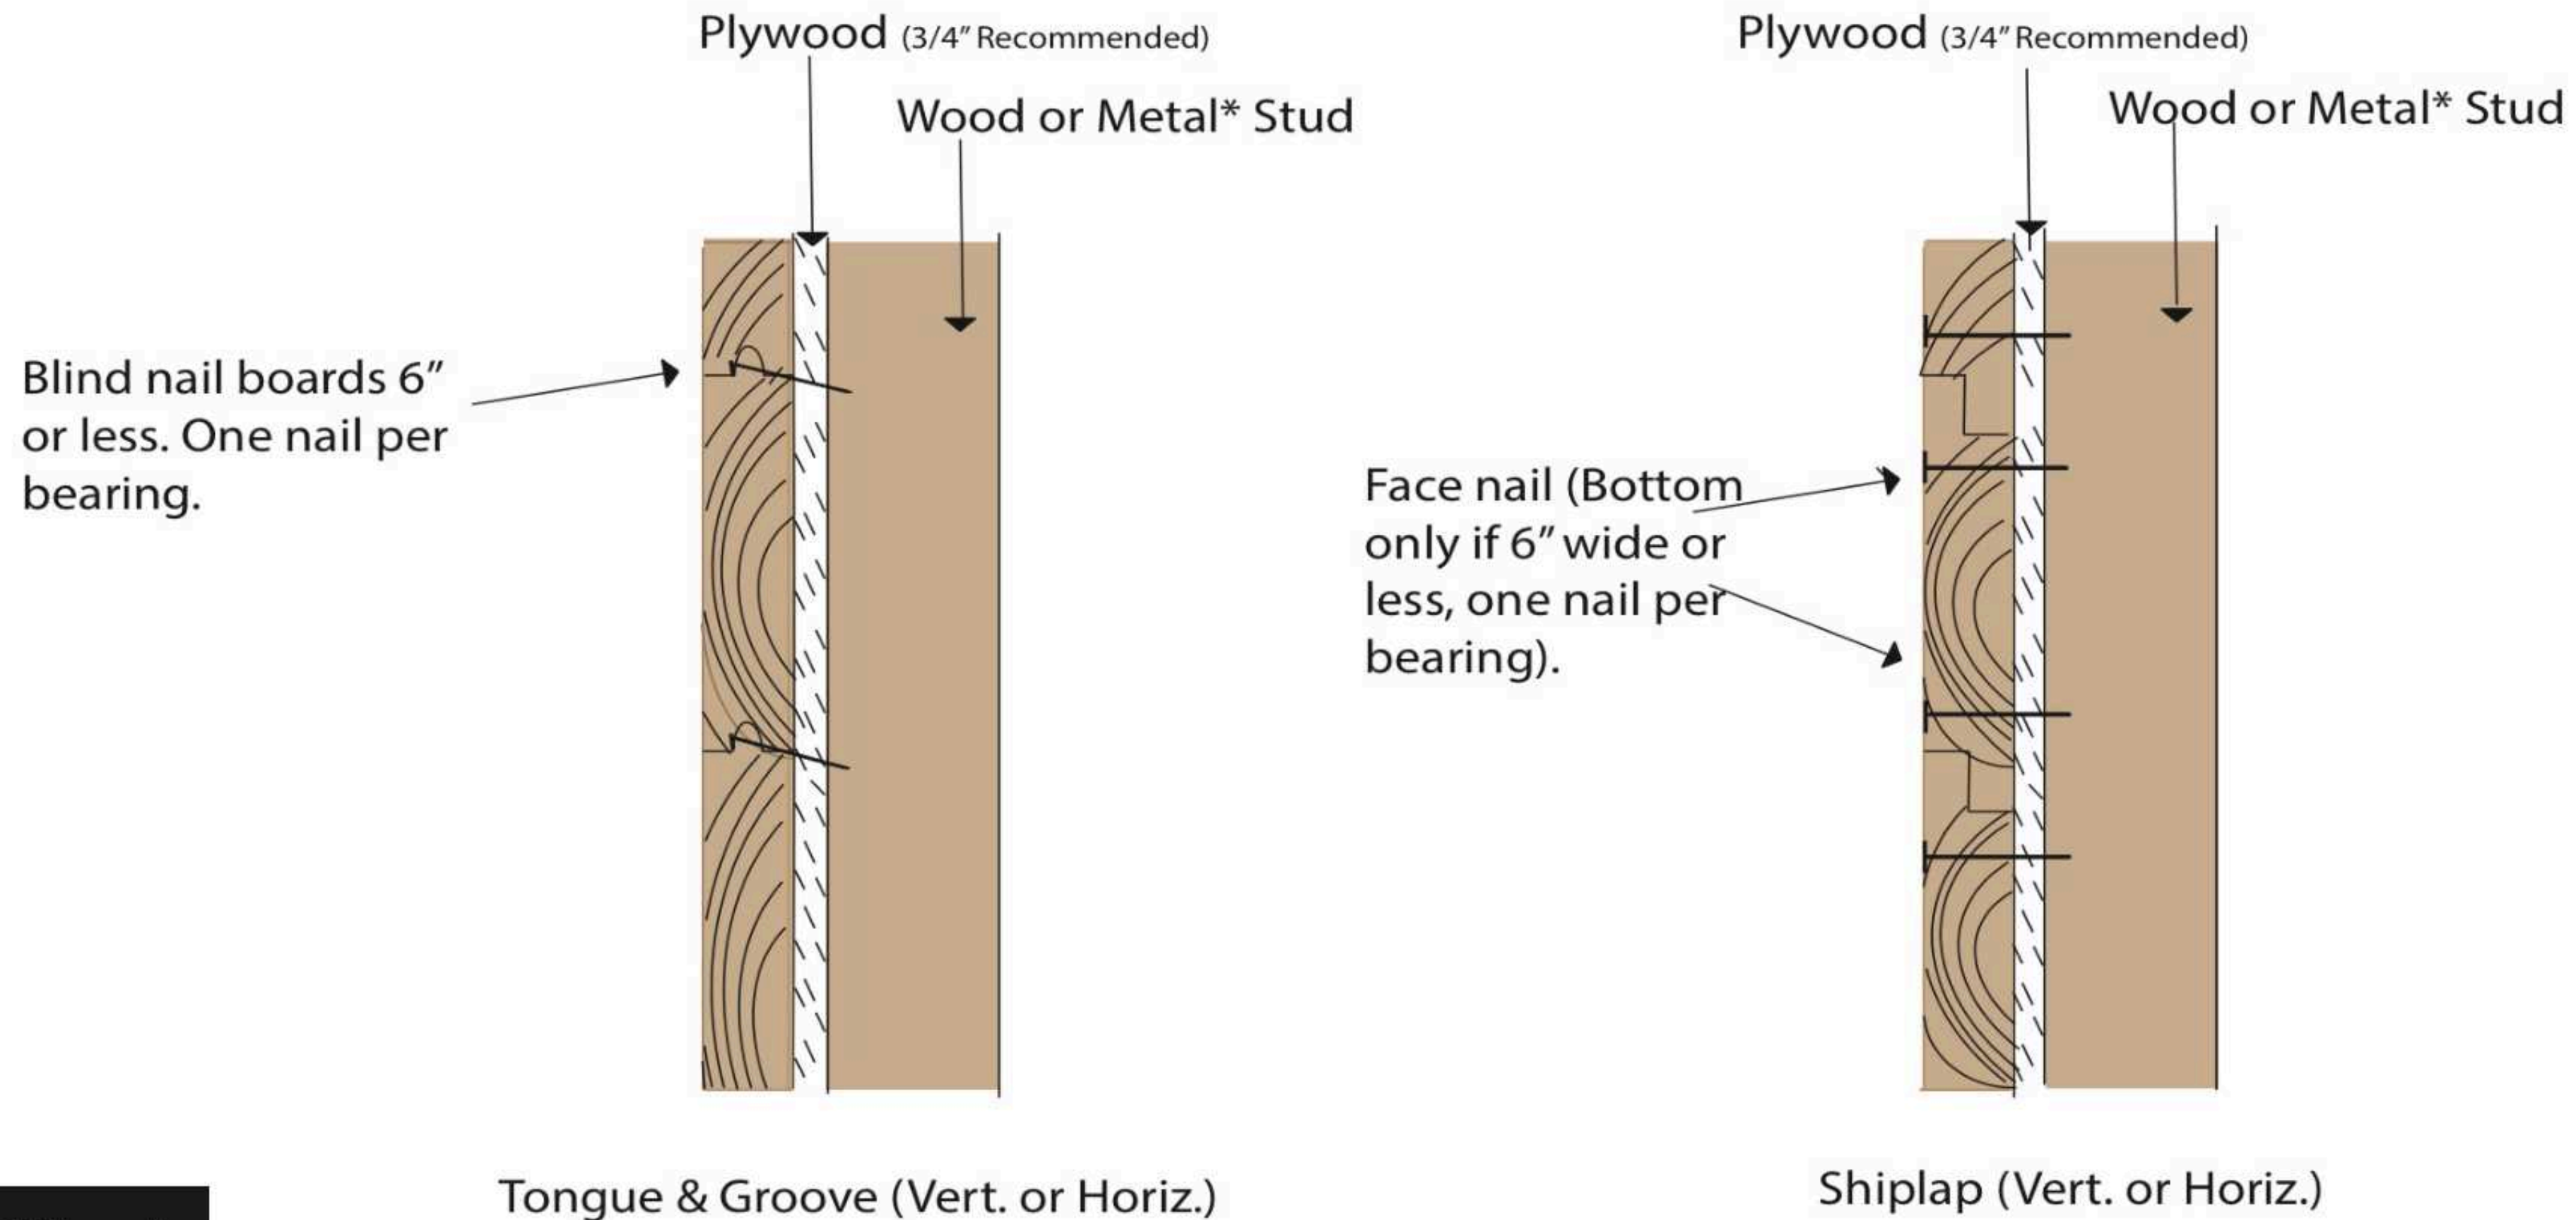


*We do not recommend nailing into metal studs

INSTALLATION OVER FURRING STRIPS

If substrate conditions require furring strips, planks can be nailed/stapled directly to furring strips. For installation requiring furring strips, if the planks are to be installed in a Horizontal Orientation, furring strips should be installed vertically. If installing the planks in a Vertical Orientation, furring strips should be installed horizontally (refer to diagram on next page). Install 1X4 furring strips spaced at a maximum of 36" and a minimum of 16" apart.


*Vertical Installation

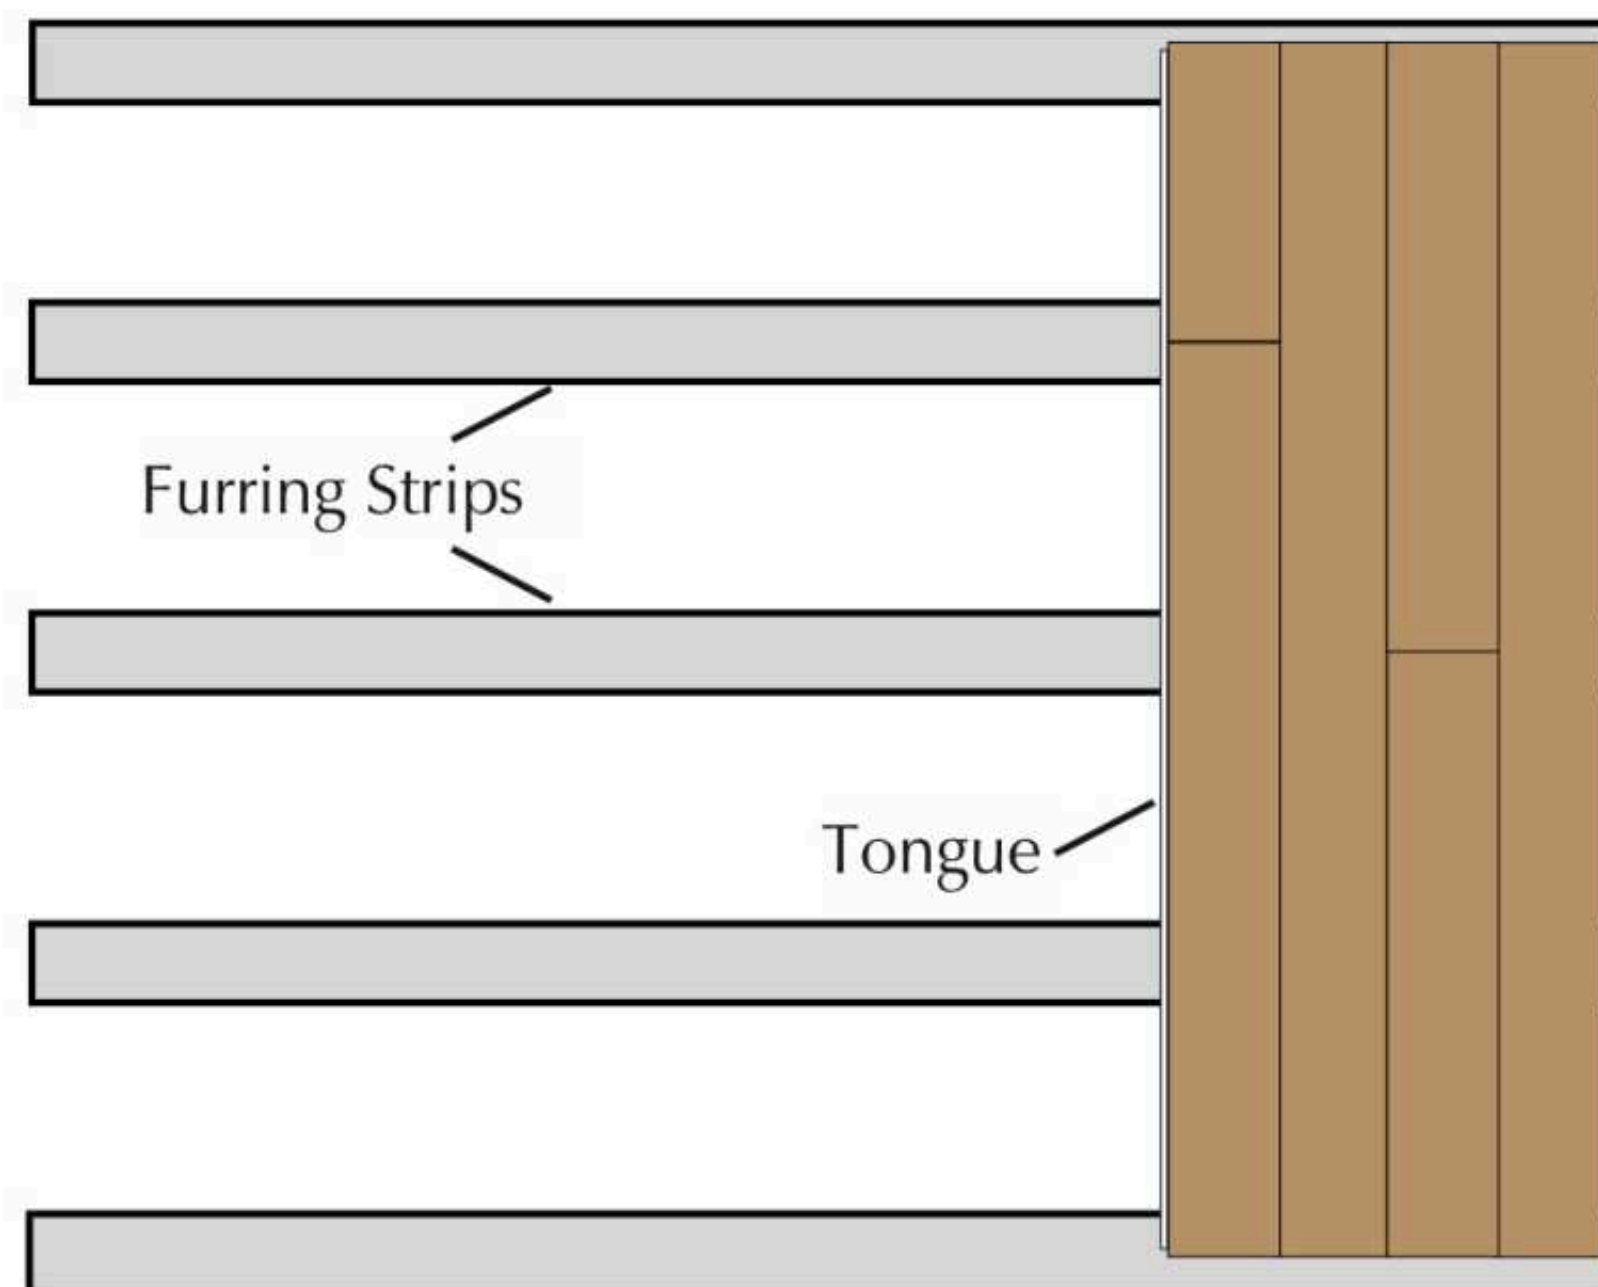

Install horizontal furring strips. Nail planks at an angle through the tongue into furring strips.



*Horizontal Installation

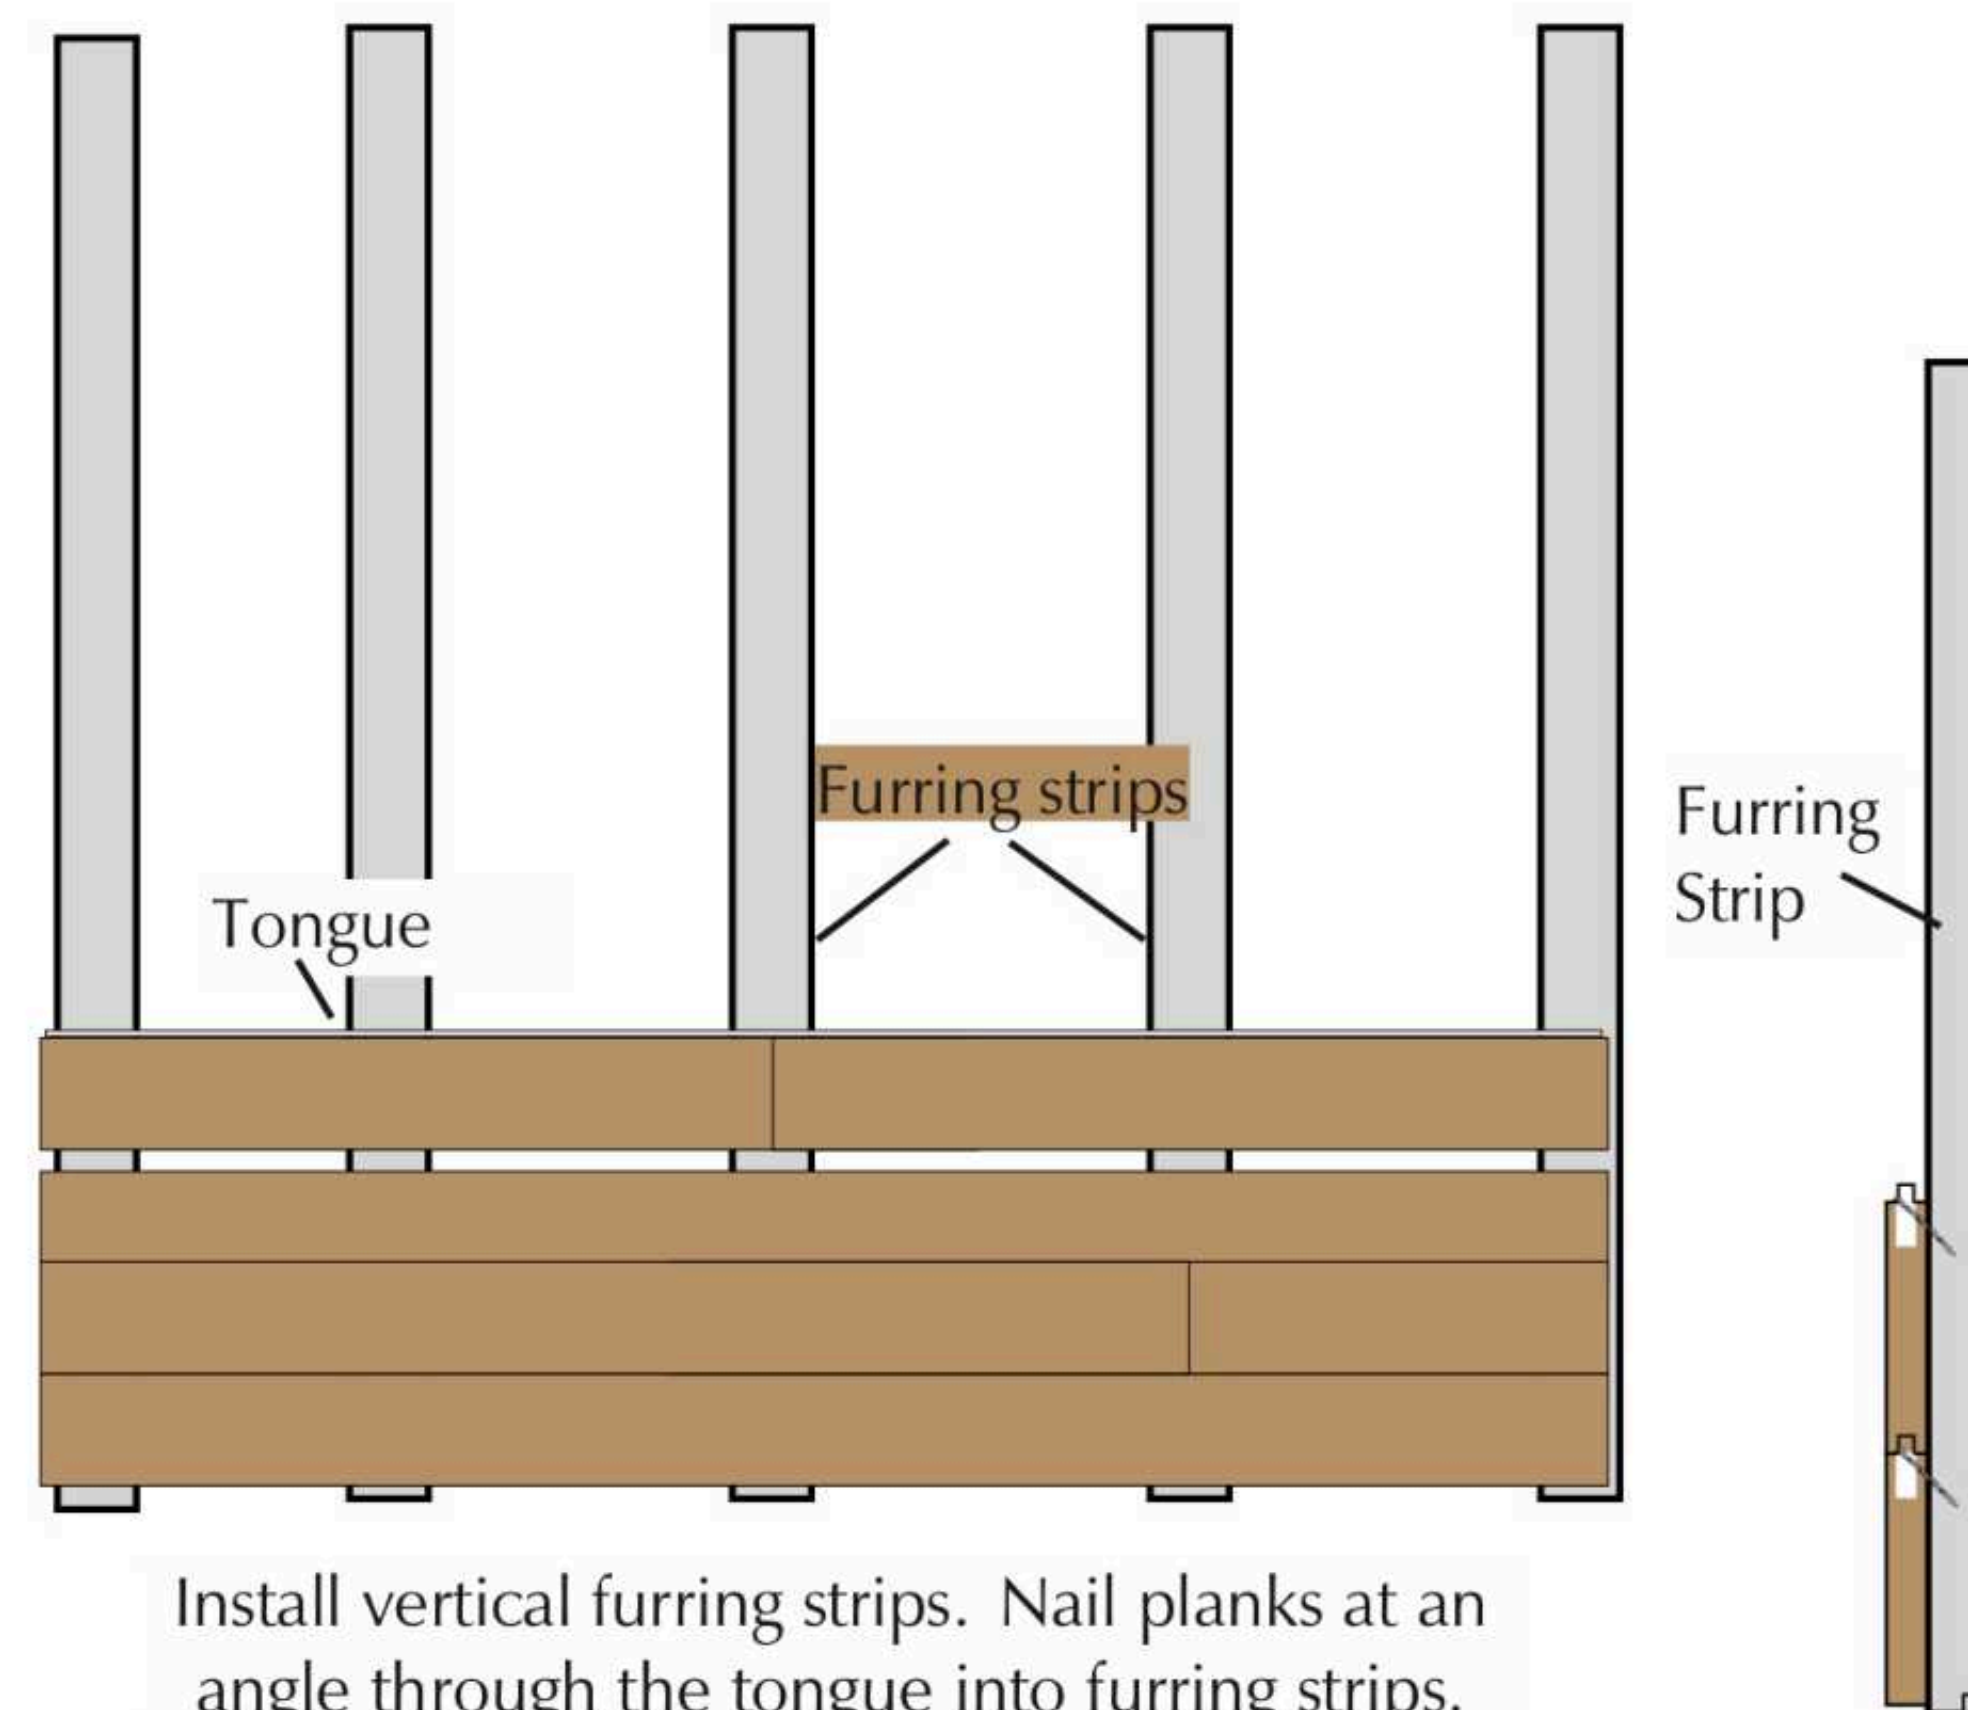

Install vertical furring strips. Nail planks at an angle through the tongue into furring strips.