Field Ionization and Field Emission with Intense, Single-cycle THz Pulses Need to replace with my own title

by

© Yunxiao Wang

A thesis submitted to the School of Graduate Studies in partial fulfilment of the requirements for the degree of Anqing, Anhui, China

B.S. in Physics University of Science and Technology of China May 2009

Memorial University of Newfoundland

Doctor of Philosophy

St. John's Newfoundland

Department of Physics August, 2016

Acknowledgements

Put your acknowledgements here...

"Intellectual and practical assistance, advice, encouragement and sources of monetary support should be acknowledged. It is appropriate to acknowledge the prior publication of any material included in the thesis either in this section or in the introductory chapter of the thesis."

— MUN School of Graduate Studies

Contents

A	Acknowledgements List of Tables List of Figures			
Li				
Li				
1	Intr	roduction	1	
	1.1	Overview of Recent Target Development	1	
	1.2	New Generation Target Cells	3	
	1.3	Structure of This Thesis	5	
Bi	Bibliography			
A Appendix title		10		

List of Tables

List of Figures

1.1	A schematic representation of a target cell. The dimensions	
	of different parts of the cell are not to scale.	,
1.2	A diagram of target cell with metal end windows	ļ

Chapter 1

Introduction

Nuclear-polarized noble gases have been proven to be very useful in various applications, such as polarized targets for electron scattering experiments [2], magnetic resonance imaging [1] and neutron scattering experiments [6]. Polarized ³He has been particularly useful for studying spin-dependent interactions involving neutrons because, to first-order approximation, a ³He nucleus has a pair of protons with paired spins and a single neutron that carries the most of the nuclear spin. Free neutrons are not used as targets because they decay with a lifetime of about 14 minutes, 42 seconds.

1.1 Overview of Recent Target Development

An early use of polarized ³He target in electron scattering experiment was at Stanford Linear Accelerator Center (SLAC) in the year of 1992. The experiment was known as E142 and investigated the spin structure of neutrons [2]. Recent experiments were conducted at Jefferson Laboratory (JLAB) in Newport News, Virginia, such

as "Measurement of the Neutron Electric Form Factor G_E^n at High Q^2 ", also known as E02-013 [7]. E06-10, E06-014 and E05-015 were experiments that investigated single-spin asymmetries [3].

The ³He targets used in these experiments were polarized with the technique Spin-Exchange Optical Pumping (SEOP). Fig. 1.1 shows what a typical target looks like, they are also referred to as "cells" very often. These cells were made of the GE180 glass and use a two-chambered design. The top chamber, known as the pumping chamber, is where ³He is polarized through SEOP. The bottom chamber, known as the target chamber, is where electron scattering occurs. The two ends of the target chamber where electron beam enters and exits are known as the "end windows". Great effort has been made in our lab to develop this generation of cells. Alkali-hybrid SEOP together with narrowband laser diode arrays have increased the ³He polarization from 37% to 70%. Among other things, we also carefully studied an additional spin relaxation mechanism that limits the maximum achievable ³He polarization, which is referred to as the "X Factor". Analysis of data accumulated through developing this generation of target cells were thoroughly discussed in Ref. [8], part of which will be presented in chapter 4.

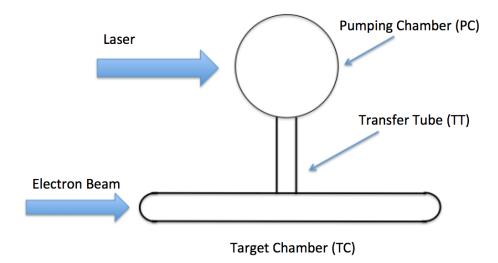


Figure 1.1: A schematic representation of a target cell. The dimensions of different parts of the cell are not to scale.

1.2 New Generation Target Cells

The future experiments planned during the 12GeV era after the upgrade will be much more demanding in terms of target cell performance. In particular, there is a desire to run experiments with higher luminosity where luminosity is the product of gas density in the target, interaction length and beam current. Increased luminosity will to more interactions that depolarize the target. We have designed and tested a new style cell that utilizes convection instead of diffusion to increase the rate at which the polarization in the target chamber is replenished by polarized gas from pumping chamber [4]. We have obtained over 50% polarization with controllable convection

speed so far.

An additional problem that comes with higher beam current is that the glass end windows of traditional design are not likely to survive the experiments. Our group started exploring the option of using metal end windows since eight years ago. Fig [?] shows an example configuration of such a target. The first problem to solve is to find out the correct material and the proper technique to incorporate metal without introducing significant spin relaxation and still being able to hold high pressure gas (12 atm) inside. This is a brand new technique that may have a profound impact on future cell designs once fully developed. Although no metal end windows have been tested so far, through carefully examining multiple glass cells with different kinds metal tubes (much larger in area compared to the end windows that will be used in JLAB experiments) attached, we have developed a reliable way of incorporating metal to target cells without introducing significant spin relaxation rates. We believe the next generation target cells used in the 12GeV era will be able to utilize metal end windows. In these test cells, the metals tubes were connected to Pyrex glass with Houskeeper seals [5] and stayed intact through high pressure tests. After exploring options such as pure copper, gold coated copper, titanium, stainless steel, gold coated titanium, we have established that electroplating gold on copper substrate yields the best result so far, we have achieved a 15.6 h relaxation time with a Pyrex cell that had a 5" long by 1" gold coated copper tube attached horizontally. The additional relaxation rate introduced by the metal surface is proportional to the area of the gold surface. By comparing relaxation rate of test metal cells with pure-glass control cells, the relaxation rate due to gold surface was extrapolated. With this result, we believe the relaxation rate introduced by small metal windows in a target will be less than

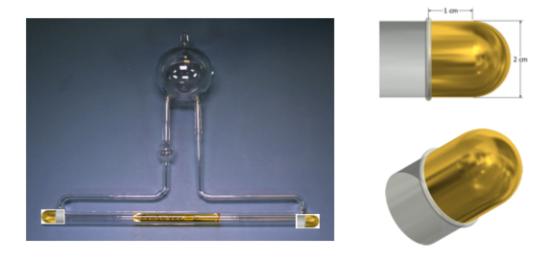


Figure 1.2: A diagram of convection style target cell with metal end windows.

1/135 hr⁻¹. To the best of our knowledge, our group was the first to have proved the potential of incorporating metal to target cells in the presence of alkali vapor.

1.3 Structure of This Thesis

This thesis focuses on both discussion on the development of high-performance polarized 3He targets that utilize spin-exchange optical pumping (SEOP) and the development of future target cells that incorporate metal end windows. Chapter 2 gives a general description of SEOP. Chapter 3 introduces polarimetry techniques used in our lab for target cell characterization. Chapter 4 discusses the result collected in our lab from the over-a-decade development of ³He target cells, in which the spin-exchange rate constant for K and ³He is calculated and the so-called "X Factor" is studied. Chapter 5 presents the development process of target cells with metal parts that aims to incorporate metal end windows to future cells for the 12 GeV era

experiments. Chapter 6 summarizes this thesis and suggests future directions.

Bibliography

- [1] M. S. Albert, G. D. Cates, B. Driehuys, W. Happer, B. Saam, C. S. Springer, and A. Wishnia. Biological magnetic resonance imaging using laser-polarized ¹²⁹xe. *Nature*, 370.
- [2] P. L. Anthony, R. G. Arnold, H. R. Band, H. Borel, P. E. Bosted, V. Breton, G. D. Cates, T. E. Chupp, F. S. Dietrich, J. Dunne, R. Erbacher, J. Fellbaum, H. Fonvieille, R. Gearhart, R. Holmes, E. W. Hughes, J. R. Johnson, D. Kawall, C. Keppel, S. E. Kuhn, R. M. Lombard-Nelsen, J. Marroncle, T. Maruyama, W. Meyer, Z.-E. Meziani, H. Middleton, J. Morgenstern, N. R. Newbury, G. G. Petratos, R. Pitthan, R. Prepost, Y. Roblin, S. E. Rock, S. H. Rokni, G. Shapiro, T. Smith, P. A. Souder, M. Spengos, F. Staley, L. M. Stuart, Z. M. Szalata, Y. Terrien, A. K. Thompson, J. L. White, M. Woods, J. Xu, C. C. Young, and G. Zapalac. Determination of the neutron spin structure function. *Phys. Rev. Lett.*, 71:959–962, Aug 1993.
- [3] K. Coulter, A. McDonald, W. Happer, T. Chupp, and M. Wagshul. Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment, 270:90–94, 1988.

- [4] P. A. M. Dolph, J. Singh, T. Averett, A. Kelleher, K. E. Mooney, V. Nelyubin, W. A. Tobias, B. Wojtsekhowski, and G. D. Cates. Gas dynamics in high-luminosity polarized ³he targets using diffusion and convection. *Phys. Rev. C*, 84:065201, Dec 2011.
- [5] W. G. Houskeeper. The art of sealing base metals through glass. *Transactions of the American Institute of Electrical Engineers*, XLII:870–877, 1923.
- [6] M. G. Huber, M. Arif, T. C. Black, W. C. Chen, T. R. Gentile, D. S. Hussey, D. A. Pushin, F. E. Wietfeldt, and L. Yang. Precision measurement of the n-3he incoherent scattering length using neutron interferometry. 102, 2009.
- [7] S. Riordan, S. Abrahamyan, B. Craver, A. Kelleher, A. Kolarkar, J. Miller, G. D. Cates, N. Liyanage, B. Wojtsekhowski, A. Acha, K. Allada, B. Anderson, K. A. Aniol, J. R. M. Annand, J. Arrington, T. Averett, A. Beck, M. Bellis, W. Boeglin, H. Breuer, J. R. Calarco, A. Camsonne, J. P. Chen, E. Chudakov, L. Coman, B. Crowe, F. Cusanno, D. Day, P. Degtyarenko, P. A. M. Dolph, C. Dutta, C. Ferdi, C. Fernández-Ramírez, R. Feuerbach, L. M. Fraile, G. Franklin, S. Frullani, S. Fuchs, F. Garibaldi, N. Gevorgyan, R. Gilman, A. Glamazdin, J. Gomez, K. Grimm, J.-O. Hansen, J. L. Herraiz, D. W. Higinbotham, R. Holmes, T. Holmstrom, D. Howell, C. W. de Jager, X. Jiang, M. K. Jones, J. Katich, L. J. Kaufman, M. Khandaker, J. J. Kelly, D. Kiselev, W. Korsch, J. LeRose, R. Lindgren, P. Markowitz, D. J. Margaziotis, S. M.-T. Beck, S. Mayilyan, K. McCormick, Z.-E. Meziani, R. Michaels, B. Moffit, S. Nanda, V. Nelyubin, T. Ngo, D. M. Nikolenko, B. Norum, L. Pentchev, C. F. Perdrisat, E. Piasetzky, R. Pomatsalyuk, D. Protopopescu, A. J. R. Puckett, V. A. Punjabi, X. Qian, Y. Qiang, B. Quinn,

- I. Rachek, R. D. Ransome, P. E. Reimer, B. Reitz, J. Roche, G. Ron, O. Rondon, G. Rosner, A. Saha, M. M. Sargsian, B. Sawatzky, J. Segal, M. Shabestari, A. Shahinyan, Y. Shestakov, J. Singh, S. Širca, P. Souder, S. Stepanyan, V. Stibunov, V. Sulkosky, S. Tajima, W. A. Tobias, J. M. Udias, G. M. Urciuoli, B. Vlahovic, H. Voskanyan, K. Wang, F. R. Wesselmann, J. R. Vignote, S. A. Wood, J. Wright, H. Yao, and X. Zhu. Measurements of the electric form factor of the neutron up to $Q^2 = 3.4~{\rm gev}^2$ using the reaction 3 he $(\overrightarrow{e}, e'n)pp$. Phys. Rev. Lett., 105:262302, Dec 2010.
- [8] J. T. Singh, P. A. M. Dolph, W. A. Tobias, T. D. Averett, A. Kelleher, K. E. Mooney, V. V. Nelyubin, Y. Wang, Y. Zheng, and G. D. Cates. Development of high-performance alkali-hybrid polarized ³He targets for electron scattering. *Phys. Rev. C*, 91:055205, May 2015.

Appendix A

Appendix title

This is Appendix A.

You can have additional appendices too (e.g., apdxb.tex, apdxc.tex, etc.). If you don't need any appendices, delete the appendix related lines from thesis.tex and the file names from Makefile.