



POWER_PATH

BQ24073: USB500 mode; 500 mA input limit.
Charge current ~297 mA; 10 k NTC.
OUT remains live while the 3V3 system is off.

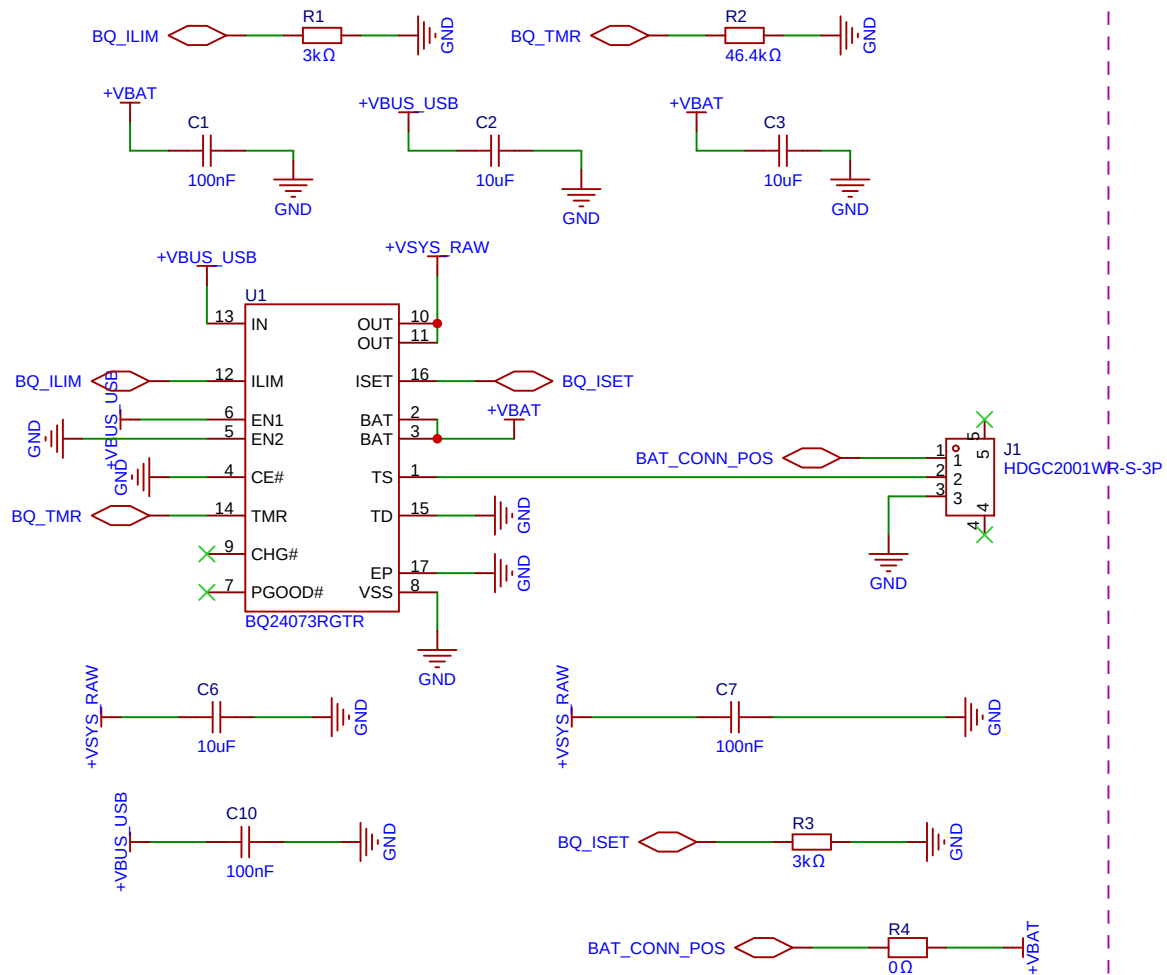



LDO_3V3

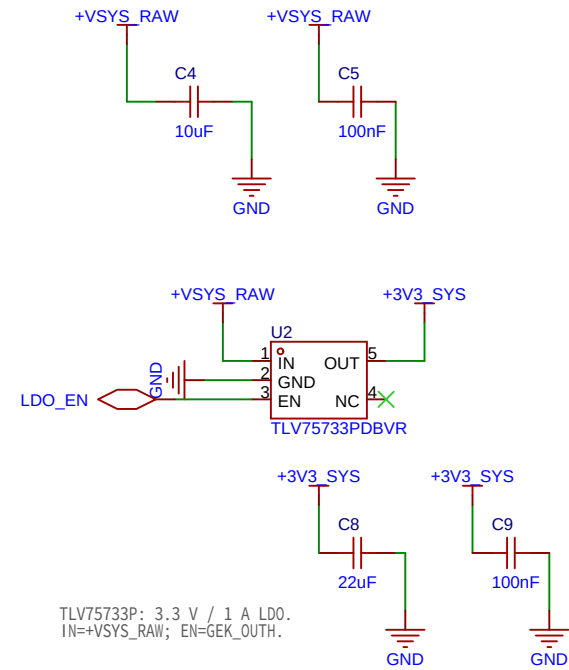


原理图	Schematic1			创建日期	2026-09-06
板子	Board1			更新日期	2026-09-08
绘制	MC100	MC100			
审阅					
	Drawed : MC100			图页	P1_POWER_PATH
		版本	尺寸	页 1 共 5	
		V1.0	A4	嘉立创EDA	



```
GEK100_35: side key active-low.  
GPIO5 reads KEY_RAW through D4.  
D4 BAS116: low-leakage selection.
```

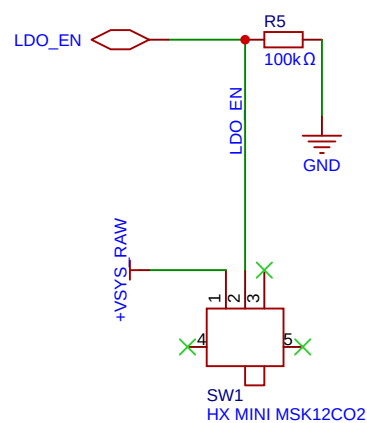


- BATTERY_MONITOR

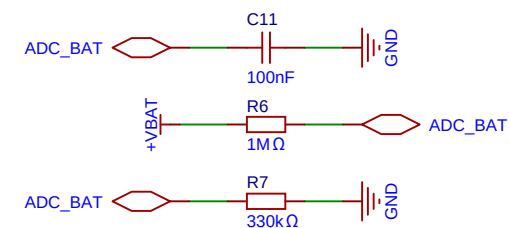



Battery ADC: fixed divider.
1 M / 330 k + 100 nF.
3.16 μ A at 4.2 V; GPI04.

STATUS_INDICATOR


Green LED: about 0.5 mA max.
Off during listen and record.

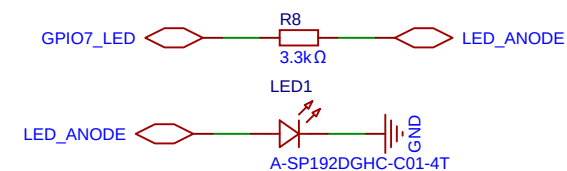


原理图	Schematic1			创建日期	2026-09-06		
				更新日期	2026-09-08		
板子	Board1			图页	P2_POWER_CONTROL		
绘制	Codex	MC100					
审阅	Checked						
	Drawed : Codex						
	Reviewed : Checked	版本	尺寸	页 2 共 5			
		V1.0	A4	嘉立创EDA			

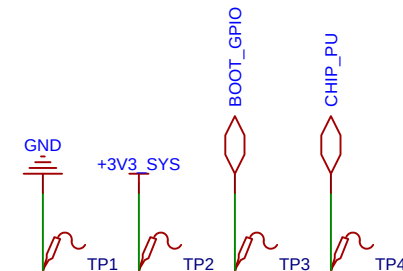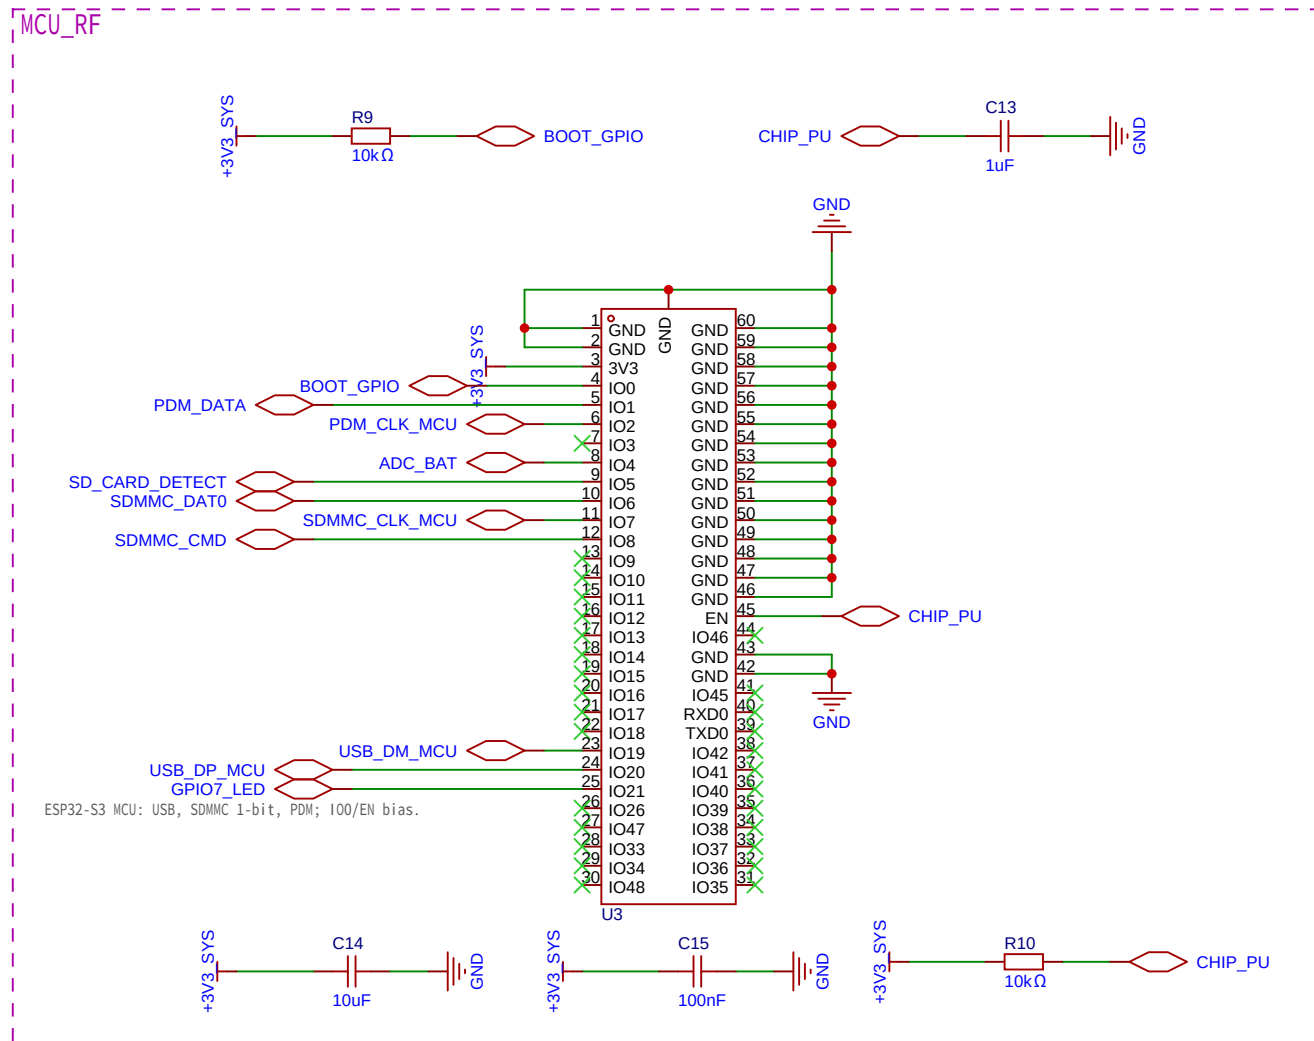

原理图	Schematic1		创建日期	2026-09-02
			更新日期	2026-09-02
板子	Board1		图页	P3_MCU_DEBUG
绘制	MC100	MC100		
审阅	Checked			
	Drawed : MC100			
	Reviewed : Checked		版本	尺寸
嘉立创EDA		V1.0	A4	页 3 共 5
		嘉立创EDA		

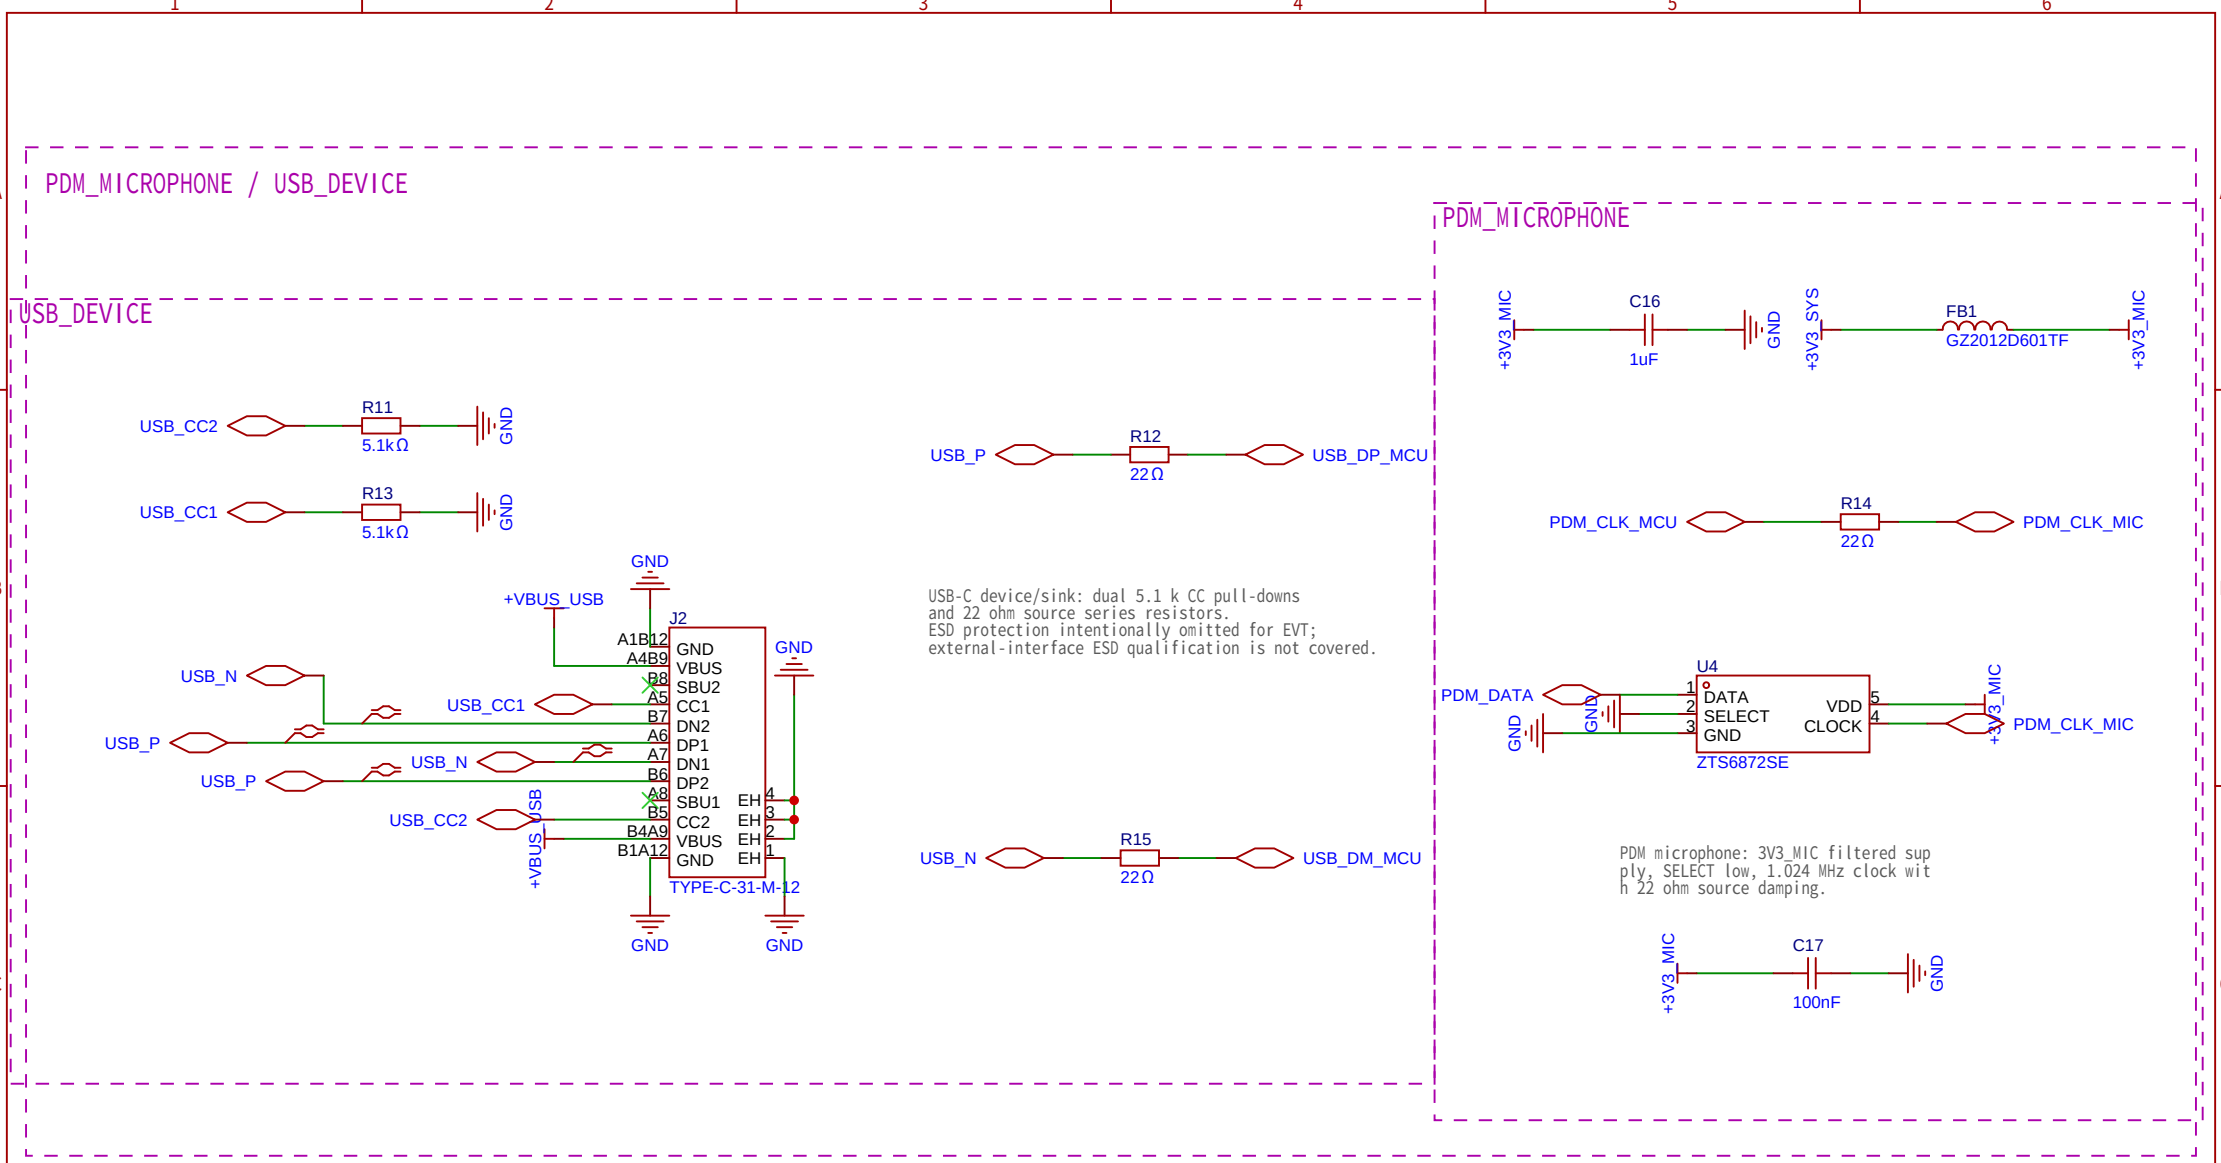

原理图	Schematic1			创建日期	2026-09-02
板子	Board1			更新日期	2026-09-02
绘制		MC100			
审阅					
		版本	尺寸	页 4 共 5	
	嘉立创EDA	V1.0	A4	嘉立创EDA	

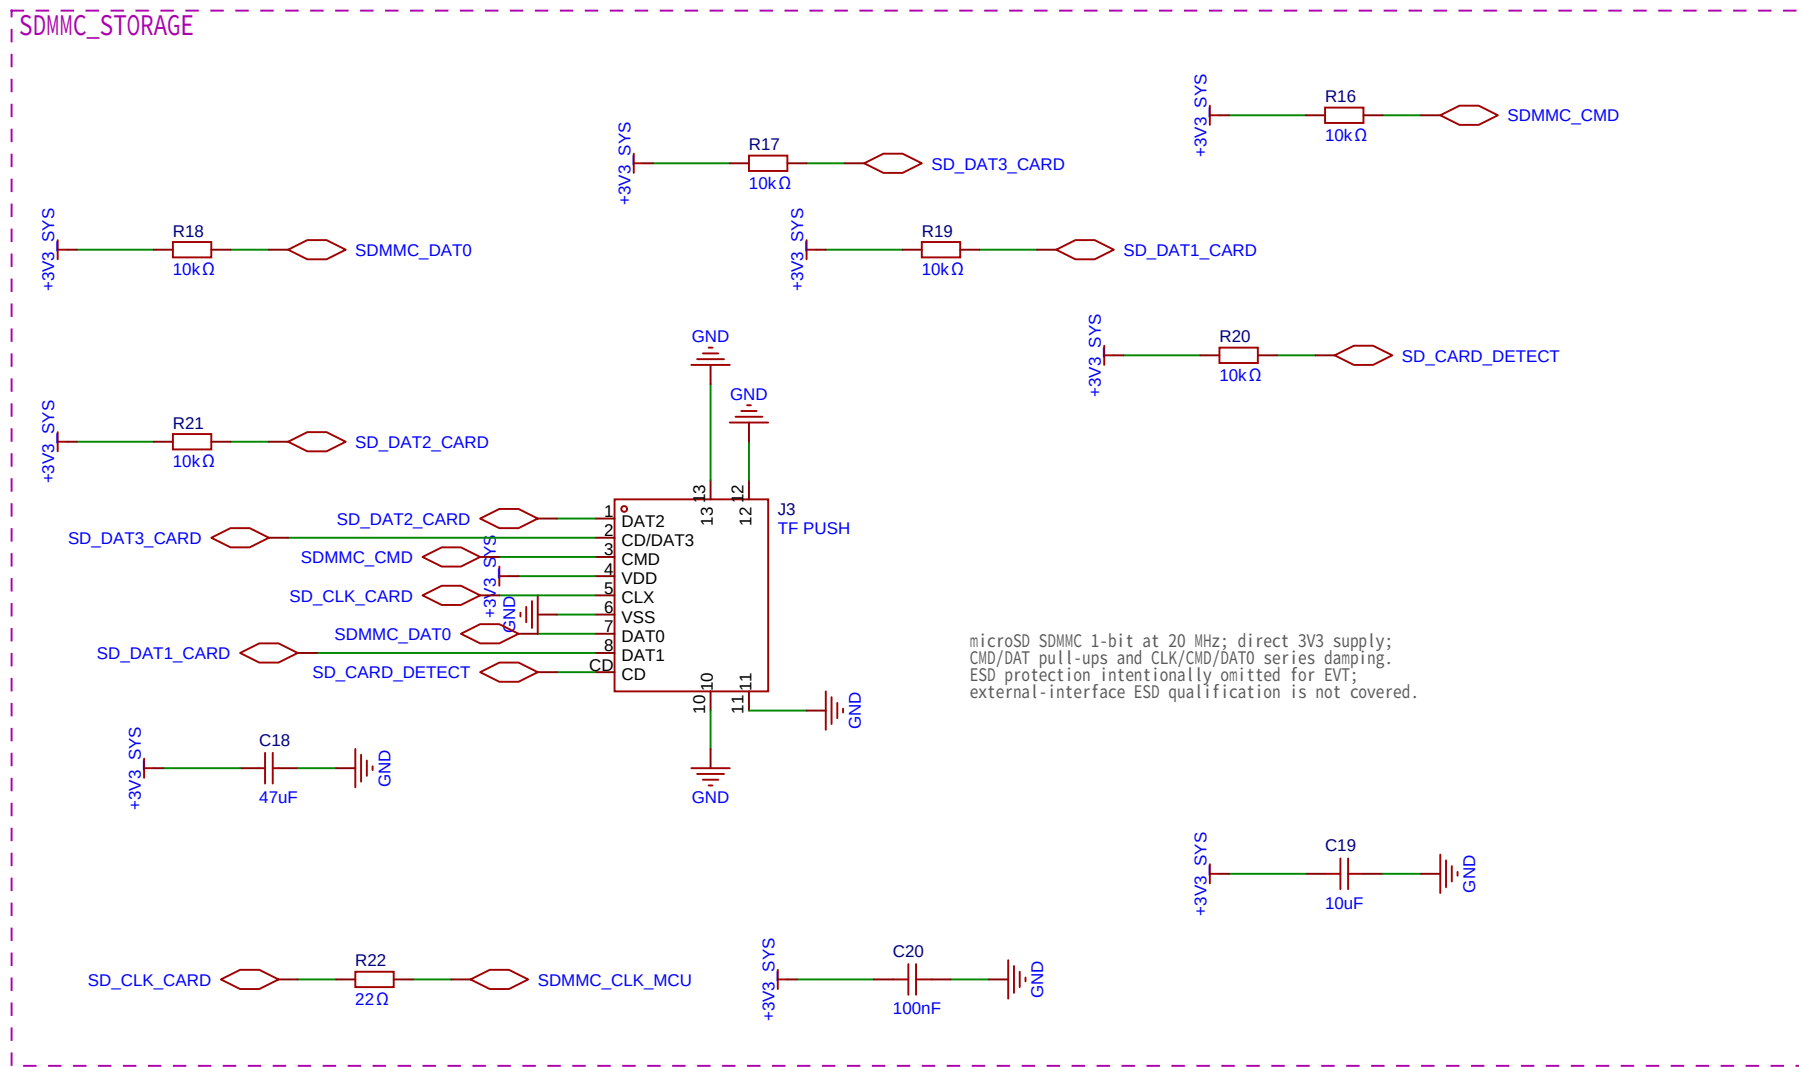

原理图	Schematic1			创建日期	2026-09-02
				更新日期	2026-09-02
板子	Board1			图页	P5_SDMMC_STORAGE
绘制				MC100	
审阅					
Drawed : MC100		版本	尺寸	页 5 共 5	
嘉立创EDA		V1.0	A4	嘉立创EDA	